


# MICROMATION TECHNOLOGY, INC.

## V386SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20/25MHz
<b>Chip Set</b>	VLSI
<b>Max. Onboard DRAM</b>	16MB
<b>SRAM Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

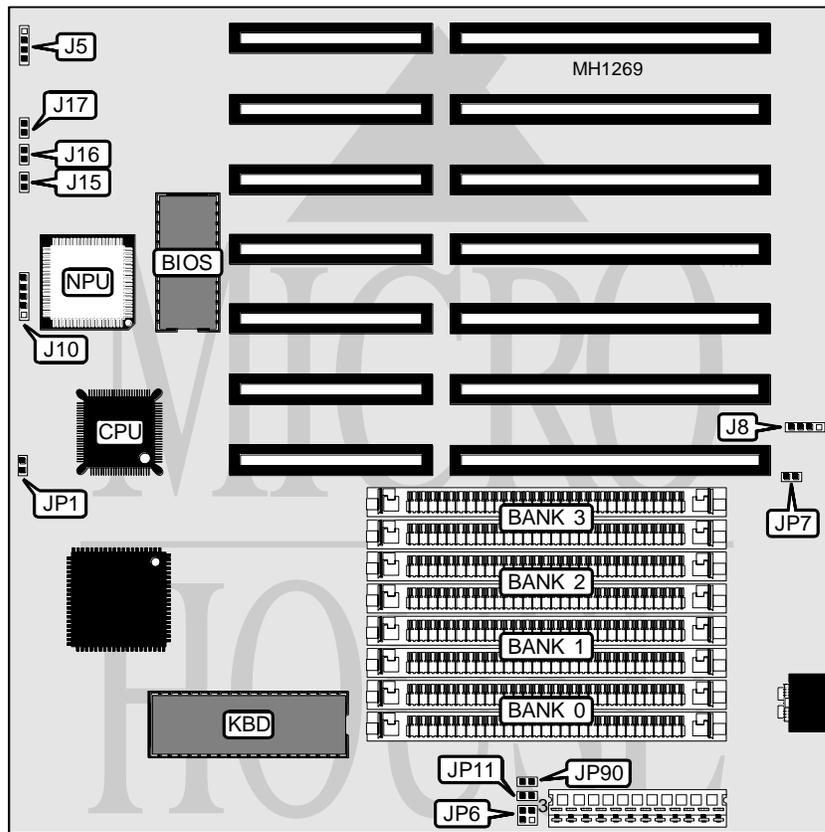

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J5	Reset switch	J15
External battery	J8	Turbo switch	J16
Power LED & keylock	J10	Turbo LED	J17

Continued on next page . . .

## MICROMATION TECHNOLOGY, INC.

## V386SX

... continued from previous page

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Pipeline enabled	JP1	closed
Pipeline disabled	JP1	open
í CMOS memory normal operation	JP6	pins 1 & 2 closed
CMOS memory clear	JP6	pins 3 & 4 closed
í Battery select internal	JP7	closed
Battery select external	JP7	open
í Monitor type select monochrome	JP11	open
Monitor type select color	JP11	closed
í Parity enabled	JP90	closed
Parity disabled	JP90	open

## DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE