


# UNIDENTIFIED HEADLAND 286GV

<b>Processor</b>	80286
<b>Processor Speed</b>	12/16MHz
<b>Chip Set</b>	Headland
<b>Max. Onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	AMI/Quadtel
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

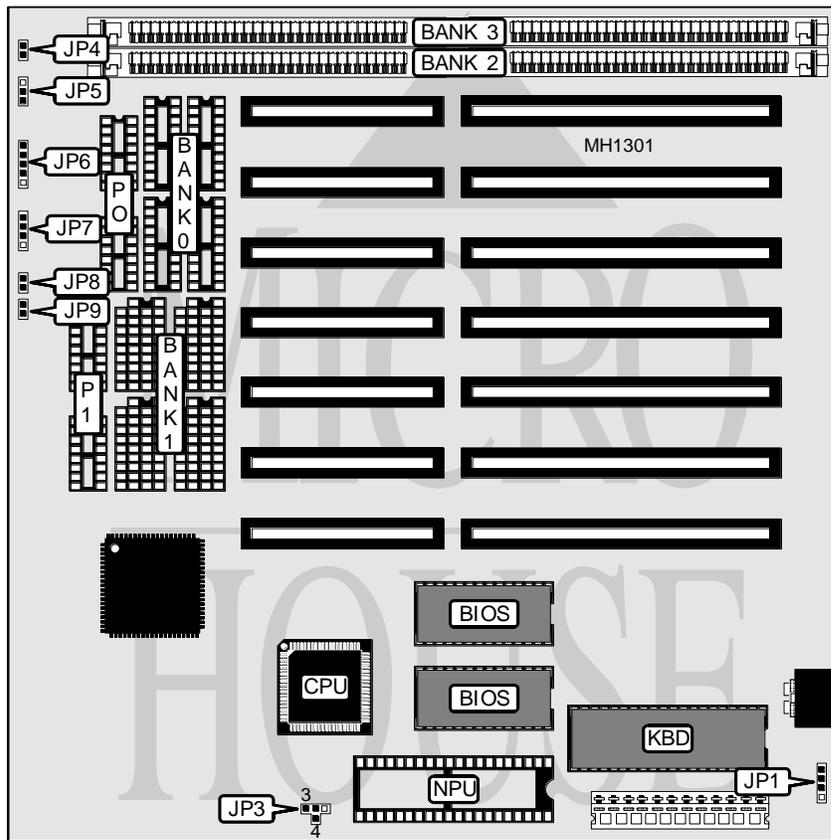

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP1	Speaker	JP7
Turbo switch	JP4	Turbo LED	JP8
Power LED & keylock	JP6	Reset switch	JP9

Continued on next page . . .

# UNIDENTIFIED

## HEADLAND 286GV

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU mode select synchronous with CPU	JP3	pins 2 & 4 closed
NPU mode select asynchronous with CPU	JP3	pins 2 & 3 closed
í Monitor type select monochrome	JP5	pins 1 & 2 closed
Monitor type select color	JP5	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0	P0	Bank 1	P1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
640KB	(4) 44256	(2) 41256	(4) 4464	(2) 4164	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9