


ELITEGROUP COMPUTER SYSTEMS, INC.

UM 486 II/486SX II

Processor	80486SX/80487SX/80486DX
Processor Speed	16/20/25/33/50MHz
Chip Set	UMC
Max. Onboard DRAM	32MB
Cache	64/128/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	4167

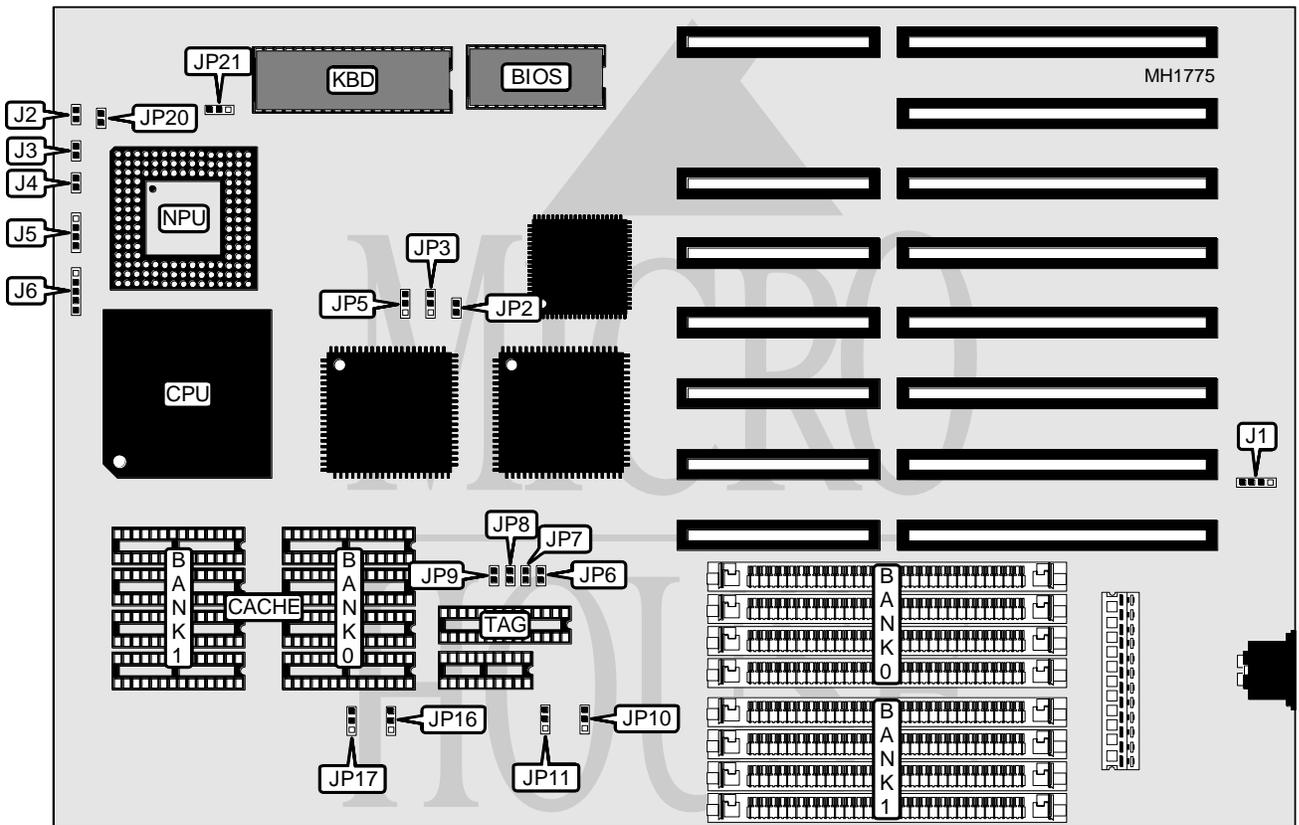

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Reset switch	J4
Turbo LED	J2	Speaker	J5
Turbo switch	J3	Power LED & keylock	J6

Continued on next page . . .

ELITEGROUP COMPUTER SYSTEMS, INC.
UM 486 II/486SX II

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP21	pins 2 & 3 closed
Monitor type select monochrome	JP21	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION								
Size	JP6	JP7	JP8	JP9	JP10	JP11	JP16	JP17
64KB	Open	Open	Open	Open	1 & 2	1 & 2	Open	1 & 2
128KB	Closed	Open	Closed	Open	2 & 3	1 & 2	1 & 2	2 & 3
256KB	Closed	Closed	Closed	Closed	2 & 3	2 & 3	2 & 3	1 & 2

Note: Pins designated should be in the closed position.

CPU TYPE CONFIGURATION				
Type	JP2	JP3	JP5	JP20
80486SX	Open	pins 2 & 3 closed	pins 1 & 2 closed	Open
80487SX	Closed	pins 1 & 2 closed	pins 2 & 3 closed	Closed
80486DX	Closed	pins 1 & 2 closed	pins 1 & 2 closed	Open