


# UNIDENTIFIED

## G M B - 3 8 6 S A L

Processor	80386SX/CX486SLC
Processor Speed	25/33MHz
Chip Set	ALI
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	220mm x 170mm
I/O Options	None
NPU Options	80387SX/CX83S87/3167

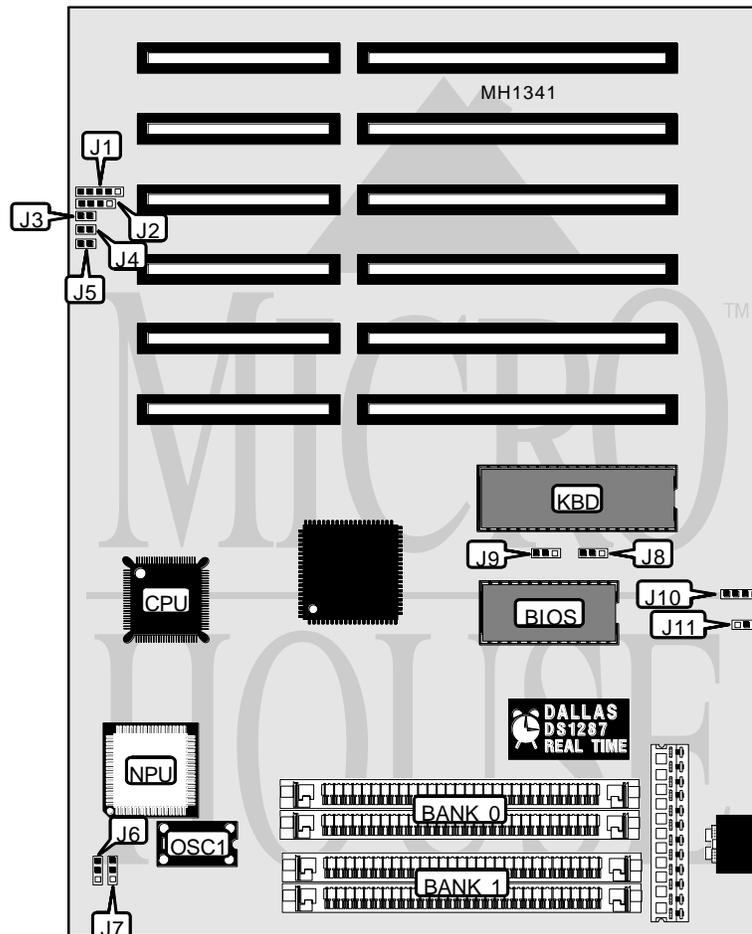

### CONNECTIONS

Purpose	Location	Purpose	Location
Power LED & keylock	J1	Turbo switch	J4
Speaker	J2	Reset switch	J5
Turbo LED	J3	External battery	J10

*Continued on next page . . .*

# UNIDENTIFIED

## GMB-386SAL

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU mode select synchronous with CPU	J6	pins 1 & 2 closed
NPU mode select synchronous with oscillator installed at OSC1	J6	pins 2 & 3 closed
í Monitor type select color	J8	pins 2 & 3 closed
Monitor type select monochrome	J8	pins 1 & 2 closed
í Battery type select internal	J11	pins 1 & 2 closed
Battery type select external	J11	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
51KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9

CPU SPEED CONFIGURATION		
Speed	J7	J9
25MHz	pins 1 & 2 closed	pins 1 & 2 closed
33MHz	pins 2 & 3 closed	pins 2 & 3 closed