


# REPLY CORPORATION PS/2 MODEL 55SX

<b>Processor</b>	486SLC2
<b>Processor Speed</b>	25/50MHz
<b>Chip Set</b>	Galaxy
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	Reply
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, 32-bit MCA riser card, parallel port, PS/2 mouse port, serial port, VGA port
<b>NPU Options</b>	80387SX

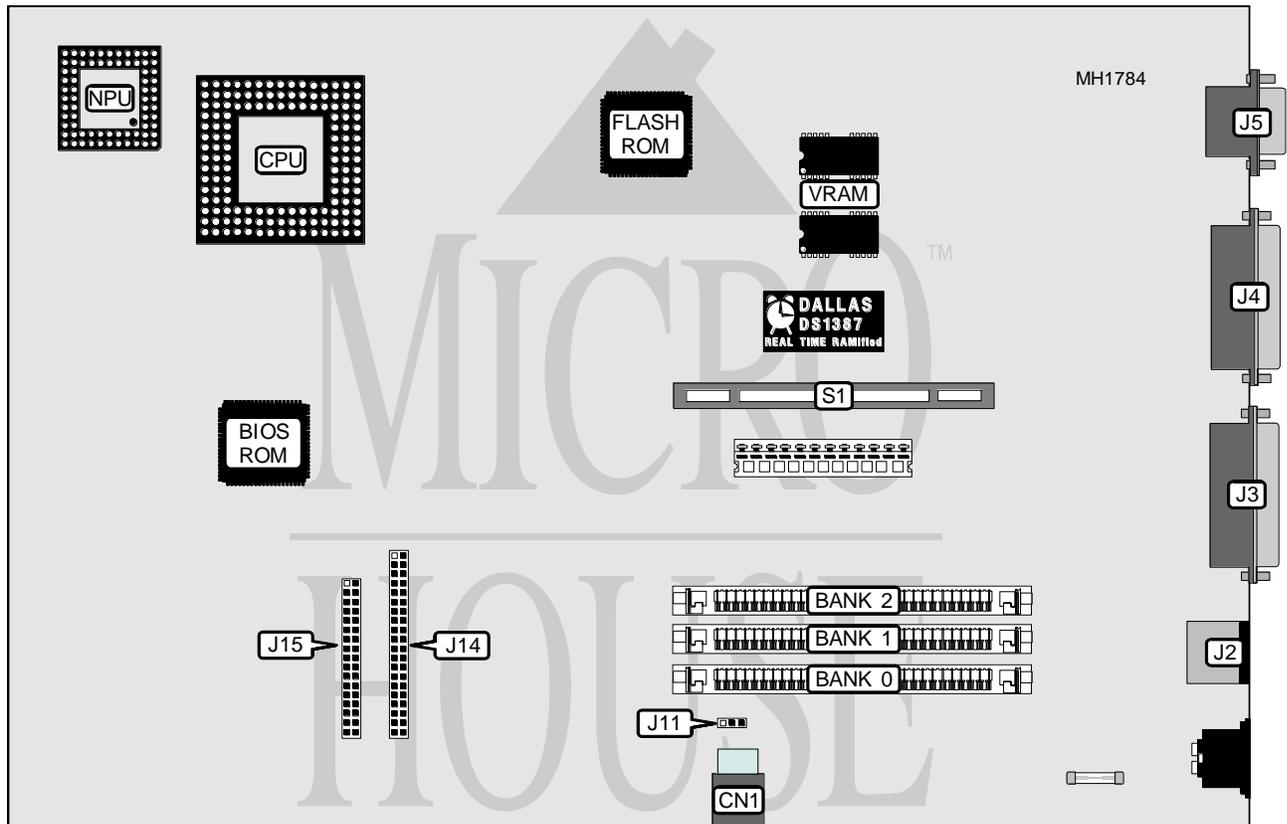

CONNECTIONS			
Purpose	Location	Purpose	Location
Drive power	CN1	VGA port	J5
PS/2 mouse port	J2	IDE interface connector	J14
Parallel port	J3	Floppy drive interface	J15
Serial port	J4	32-bit MCA riser card	S1

Continued next page...

# REPLY CORPORATION

## PS/2 MODEL 55SX

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J11	pins 1 & 2 closed
CMOS memory clear	J11	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
4MB	(1) 4M x 9	NONE	NONE
8MB	(1) 4M x 9	(1) 4M x 9	NONE
12MB	(1) 4M x 9	(1) 4M x 9	(1) 4M x 9
12MB	(1) 4M x 9	(1) 8M x 9	NONE
16MB	(1) 4M x 9	(1) 4M x 9	(1) 8M x 9