


# EVEREX SYSTEMS, INC.

## SLIMLINE 386SX (EV-18123)

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20MHz
<b>Chip Set</b>	C & T/Suntac
<b>Max. onboard DRAM</b>	8MB
<b>SRAM Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, riser card, serial port (2), VGA port
<b>NPU Options</b>	80387SX

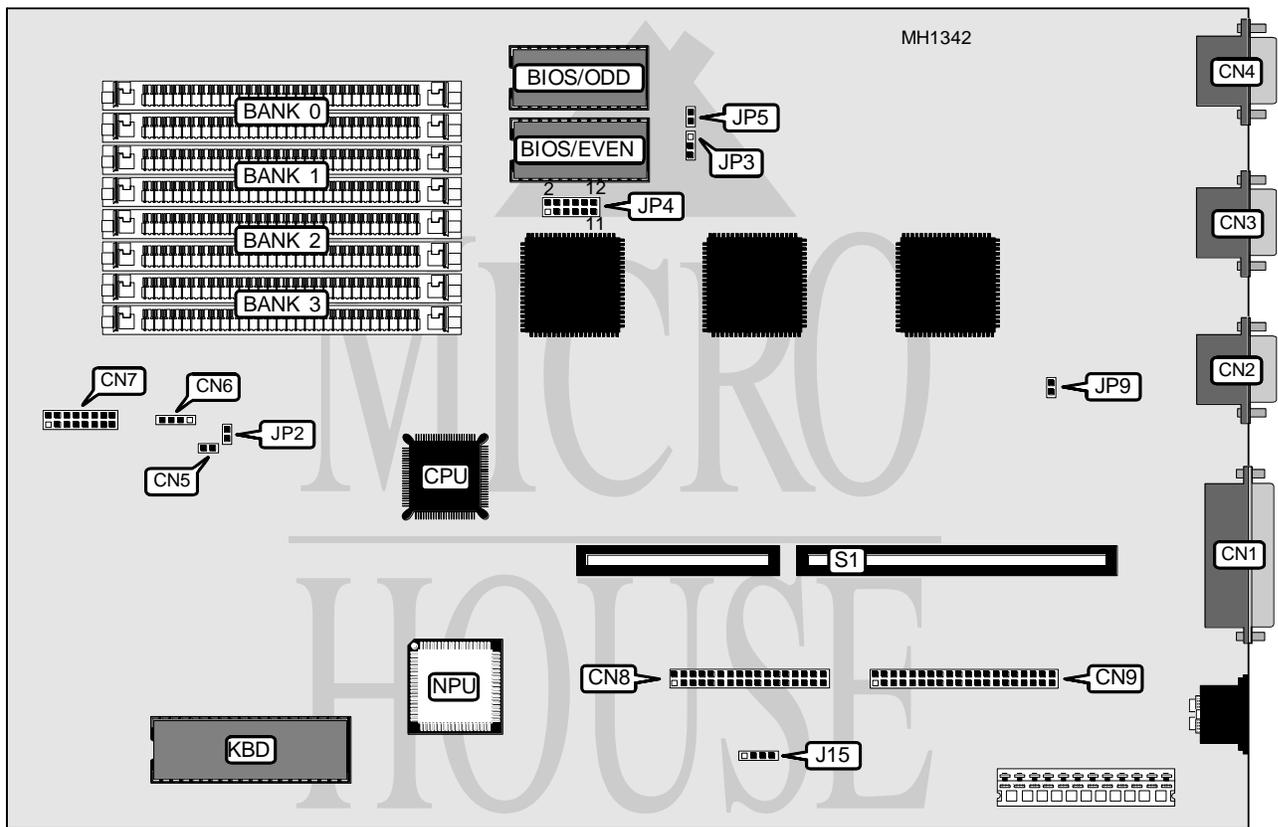

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J15	Speaker	CN6
Parallel port	CN1	Front panel connector	CN7
Serial port (COM1)	CN2	Floppy drive interface	CN8
Serial port (COM2)	CN3	IDE interface	CN9
VGA port	CN4	Riser card	S1
IDE interface LED	CN5		

Continued on next page . . .

**EVEREX SYSTEMS, INC.**  
**SLIMLINE 386SX (EV-18123)**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP2	Open
í Factory configured - do not alter	JP3	pins 2 & 3 closed
í Factory configured - do not alter	JP4	pins 3 & 4, 9 & 10 closed
í Factory configured - do not alter	JP5	Closed
í Onboard video enabled	JP9	Closed
Onboard video disabled	JP9	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9			