


# DTK COMPUTER, INC.

## PTM - 1260V

<b>Processor</b>	80286
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	VLSI
<b>Max. Onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	DTK
<b>Dimensions</b>	329mm x 218mm
<b>I/O Options</b>	Floppy drive interface, parallel port, serial ports (2), video port
<b>NPU Options</b>	80287

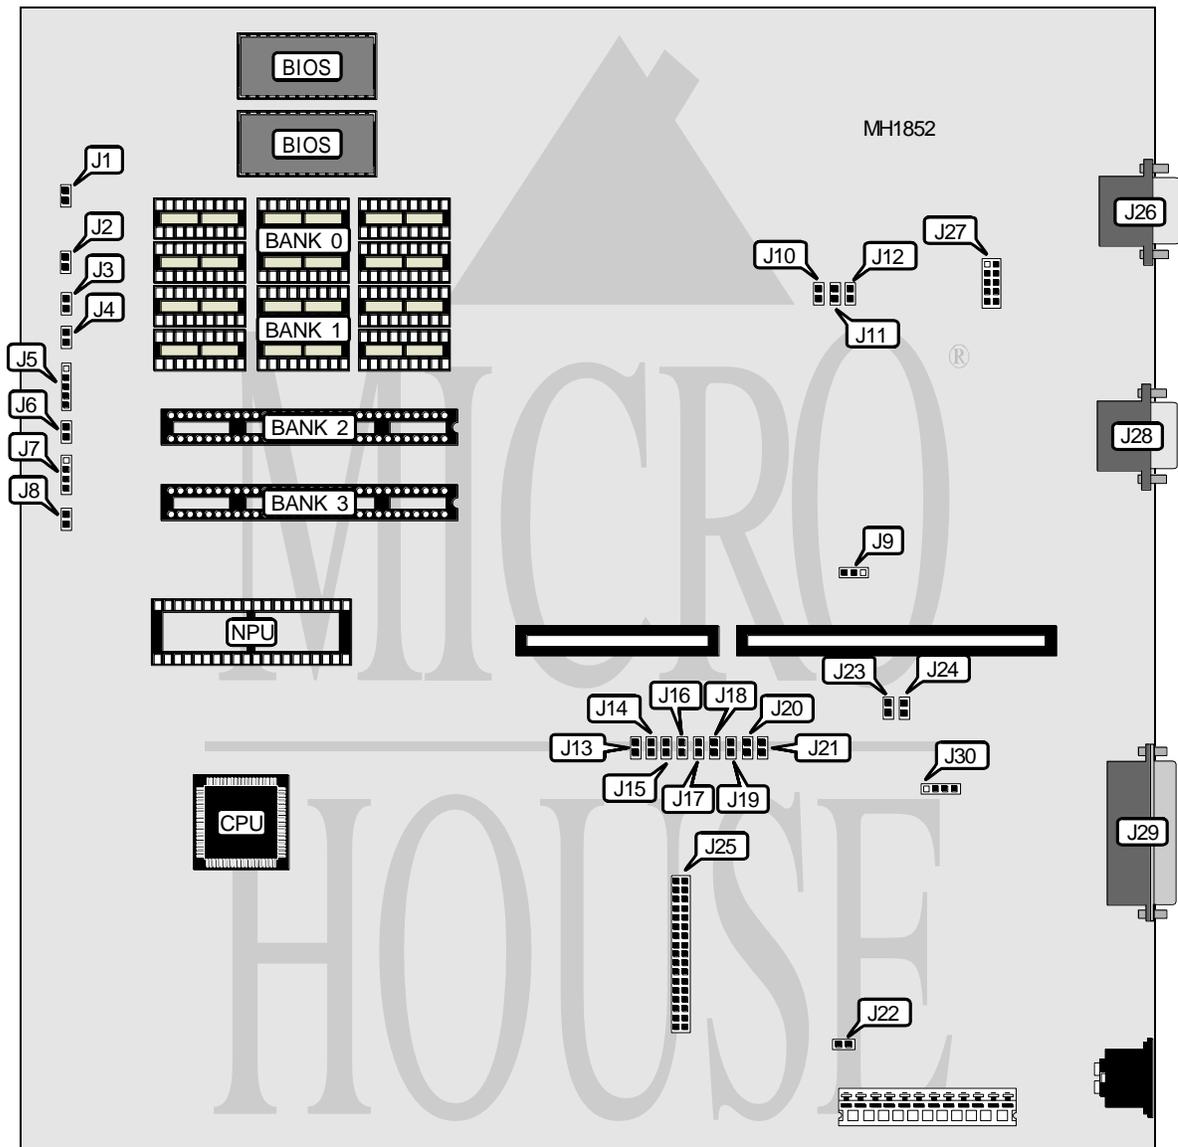

Continued on next page . . .

# DTK COMPUTER, INC.

## P T M - 1 2 6 0 V

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J3	9-pin analog video port	J26
Turbo LED	J4	Serial port 2	J27
Power LED & keylock	J5	Serial port 1	J28
Speaker	J7	Parallel port	J29
Floppy drive interface	J25	External battery	J30

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í BIOS type select 32KB	J1	Open
BIOS type select 64KB	J1	Closed
í Factory configured - do not alter	J2	N/A
í Factory configured - do not alter	J4	N/A
í Factory configured - do not alter	J7	N/A
í Zero wait state enabled	J8	Closed
Zero wait state disabled	J8	Open
í Factory configured - do not alter	J12	N/A
í Floppy drive interface enabled	J15	Closed
Floppy drive interface disabled	J15	Open
í Factory configured - do not alter	J16	N/A
í Monochrome display primary	J22	Open
CGA display primary	J22	Closed
í Factory configured - do not alter	J23	N/A
í Factory configured - do not alter	J24	N/A

DISPLAY CONFIGURATION		
Setting	J10	J11
Monochrome display adapter enabled	Closed	Closed
Monochrome display adapter disabled	Open	Open

PRIMARY SERIAL PORT CONFIGURATION		
Port 1 (J28)	J18	J21
COM1	Closed	Closed
COM3	Open	Open
Disabled	Open	Closed
Disabled	Closed	Open

SECONDARY SERIAL PORT CONFIGURATION		
Port 2 (J27)	J19	J20
COM2	Closed	Closed
COM4	Open	Open
Disabled	Open	Closed
Disabled	Closed	Open

Continued on next page. . .

DTK COMPUTER, INC.  
PTM - 1260V

..continued from previous page

PARALLEL PORT CONFIGURATION			
LPT	J15	J17	J9
LPT1	Closed	Closed	pins 1 & 2 closed
LPT2	Open	Open	pins 2 & 3 closed
Disabled	Open	Closed	N/A
Disabled	Closed	Open	N/A

DRAM CONFIGURATION						
Size	Bank 0	Parity 0	Bank 1	Parity 1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION			
Size	J6	J13	J14
512KB	Closed	Closed	Closed
512KB	Closed	Closed	Open
1MB	Closed	Open	Closed
1MB	Closed	Open	Open
2MB	Closed	Open	Open
4MB	Open	Closed	Closed