


UNIDENTIFIED MB-1325P (II)

Processor 80386DX
Processor Speed 25MHz
Chip Set OPTI
Max. Onboard DRAM 16MB (8MB on memory board)
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options 32-bit external memory card
NPU Options 80387DX/3167

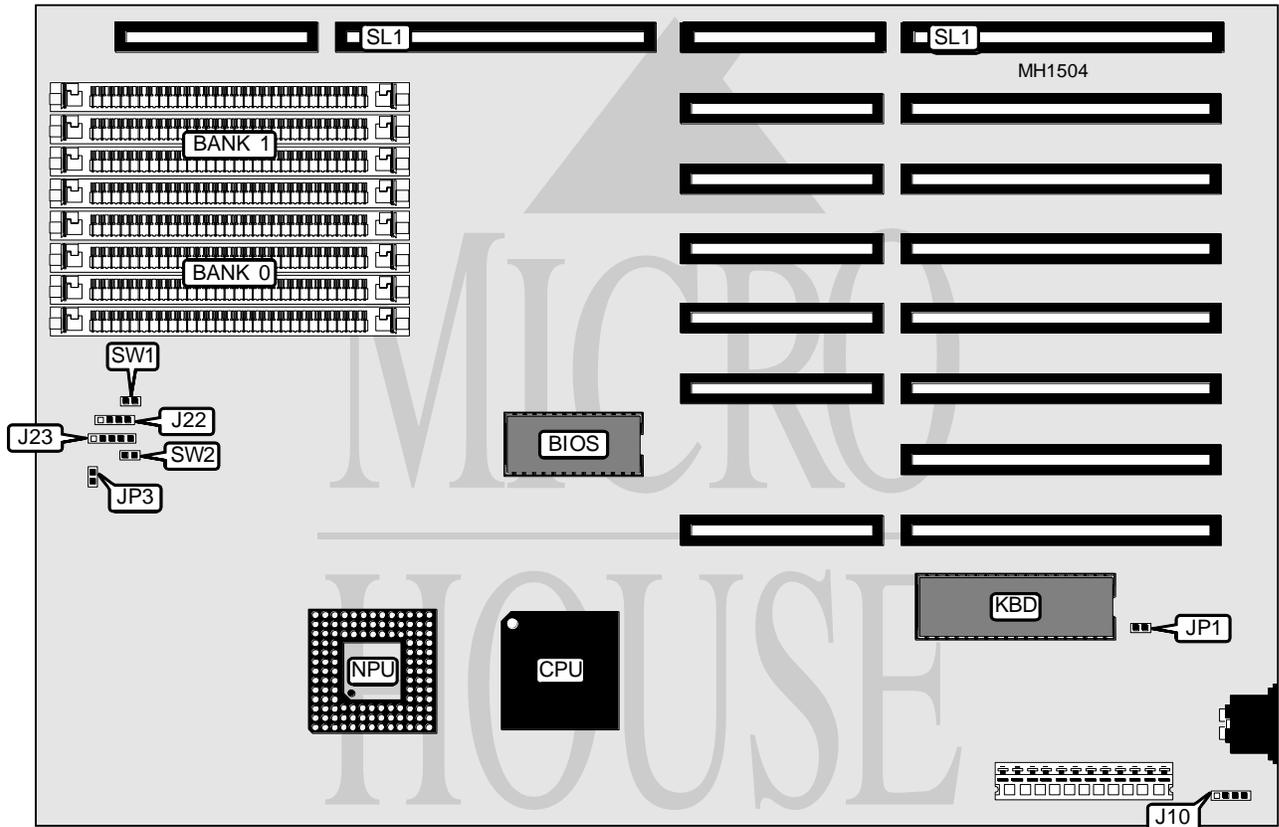

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J10	Reset switch	SW1
Speaker	J22	Turbo switch	SW2
Power LED & keylock	J23	32-bit external memory card	SL1
Turbo LED	JP3		

Continued on next page . . .

UNIDENTIFIED

MB-1325P (II)

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í Internal battery installed	JP2	Closed
External battery installed	JP2	Open
í Turbo switch enabled	SW2	Open
Turbo switch disabled	SW2	Closed
Note: The location of JP2 is unidentified.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9