


EVEREX SYSTEMS, INC.
TEMPO 286/16C EV-18122

Processor 80286
Processor Speed 16MHz
Chip Set C & T
Max. onboard DRAM 8MB
SRAM Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options Floppy drive interface, IDE interface, Parallel port, serial port (2), VGA port
NPU Options 80287

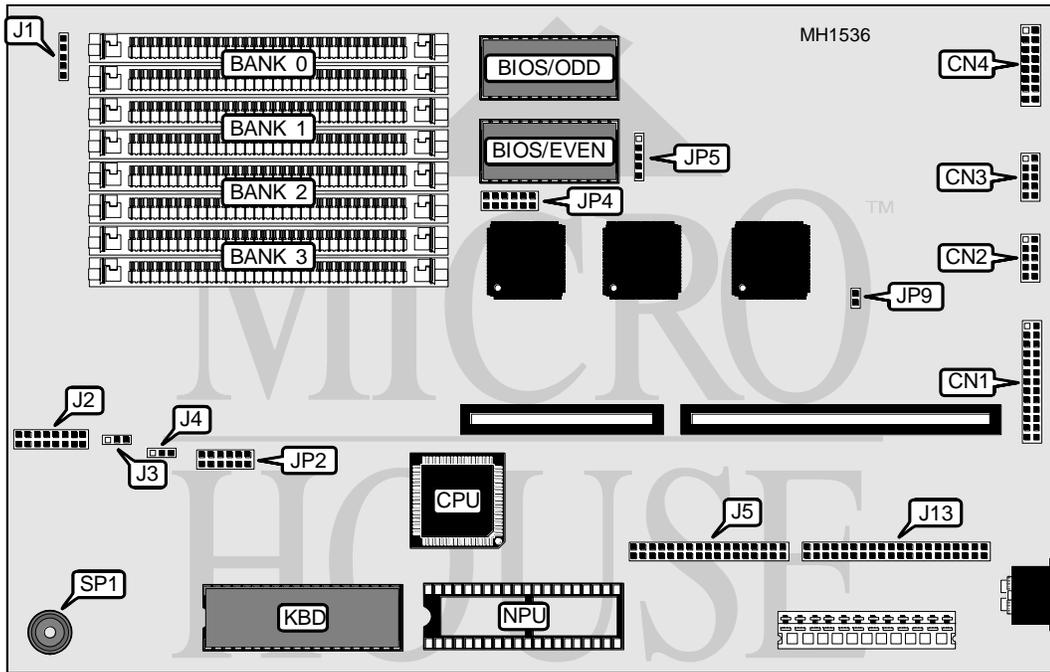

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	Speaker connector	J3
Serial port (COM1)	CN2	IDE interface LED	J4
Serial port (COM2)	CN3	Floppy drive interface	J5
VGA port	CN4	IDE interface	J13
Unknown	J1	Speaker	SP1
LED connector	J2		

Continued on next page . . .

EVEREX SYSTEMS, INC.
TEMPO 286/16C EV-18122

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP2	pins 1 & 2, 5 & 6, 7 & 11 closed
í Factory configured - do not alter	JP4	Pins 3 & 4, 10 & 11 closed
í Factory configured - do not alter	JP5	Pins 2 & 3, 4 & 5 closed
í Video enabled	JP9	Closed
Video disabled	JP9	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9			