


INFORMTECH INTERNATIONAL, INC.

IT386SK VER. 1.0

| | |
|--------------------------|-----------------|
| Processor | 80386DX |
| Processor Speed | 25/33/40MHz |
| Chip Set | C & T |
| Max. onboard DRAM | 32MB |
| Cache | 32/64/128/256KB |
| BIOS | Unidentified |
| Dimensions | 330mm x 218mm |
| I/O Options | None |
| NPU Options | 80387DX |

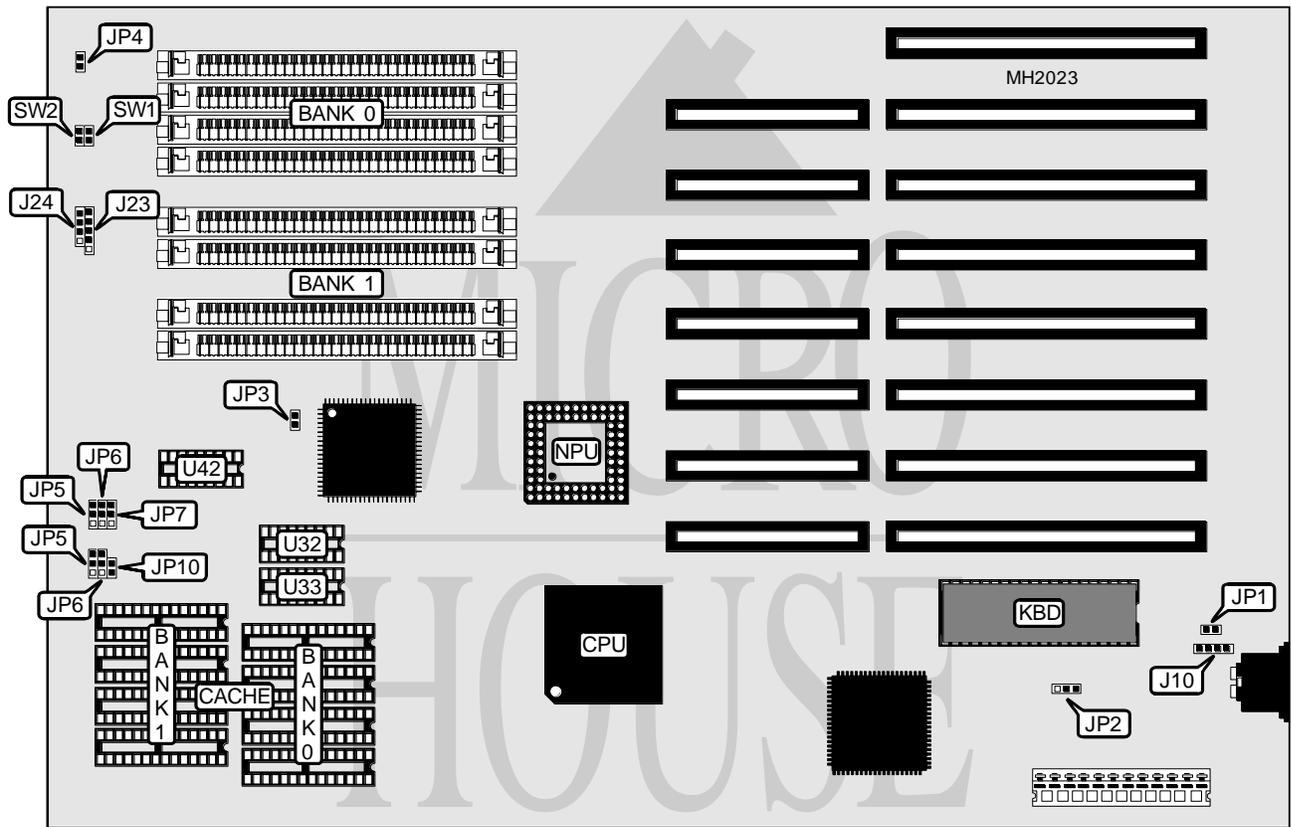

| CONNECTIONS | | | |
|---------------------|----------|--------------|----------|
| Purpose | Location | Purpose | Location |
| Turbo LED | JP4 | Speaker | J24 |
| External battery | J10 | Reset switch | SW1 |
| Power LED & keylock | J23 | Turbo switch | SW2 |

Continued next page...

INFORMTECH INTERNATIONAL, INC.
IT386SK VER. 1.0

... continued from previous page.

| USER CONFIGURABLE SETTINGS | | |
|----------------------------------|--------|-------------------|
| Function | Jumper | Position |
| í Monitor type select monochrome | JP1 | Closed |
| Monitor type select color | JP1 | Open |
| í CMOS memory normal operation | JP2 | Pins 2 & 3 closed |
| CMOS memory clear | JP2 | Pins 1 & 2 closed |

| DRAM CONFIGURATION | | |
|--------------------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (4) 256K x 9 | NONE |
| 2MB | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | (4) 1M x 9 | NONE |
| 5MB | (4) 256K x 9 | (4) 1M x 9 |
| 8MB | (4) 1M x 9 | (4) 1M x 9 |
| 16MB | (4) 4M x 9 | NONE |
| 20MB | (4) 1M x 9 | (4) 4M x 9 |
| 32MB | (4) 4M x 9 | (4) 4M x 9 |

| CACHE CONFIGURATION | | | | | |
|---------------------|-------------|-------------|-------------|-------------|-------------|
| Size | Bank 0 | Bank 1 | TAG (U32) | TAG (U33) | TAG (U2) |
| 32KB | (4) 8K x 8 | NONE | (1) 2K x 4 | (1) 2K x 4 | (1) 2K x 4 |
| 64KB | (4) 8K x 8 | (4) 8K x 8 | (1) 4K x 4 | (1) 4K x 4 | (1) 4K x 4 |
| 128KB | (4) 32K x 8 | NONE | (1) 8K x 4 | (1) 8K x 4 | (1) 8K x 4 |
| 256KB | (4) 32K x 8 | (4) 32K x 8 | (1) 16K x 4 | (1) 16K x 4 | (1) 16K x 4 |

| CACHE JUMPER CONFIGURATION | | | | | | |
|----------------------------|-------|-------|-------|--------|-------|-------|
| Size | JP5 | JP6 | JP7 | JP8 | JP9 | JP10 |
| 32KB | 1 & 2 | 1 & 2 | 1 & 2 | Open | 2 & 3 | 2 & 3 |
| 64KB | 2 & 3 | 1 & 2 | 1 & 2 | Open | 2 & 3 | 1 & 2 |
| 128KB | 2 & 3 | 1 & 2 | 2 & 3 | Closed | 2 & 3 | 1 & 2 |
| 256KB | 2 & 3 | 2 & 3 | 2 & 3 | Closed | 1 & 2 | 1 & 2 |

Note: Pins designated should be in the closed position.

| AT BUS SPEED SELECTION | | |
|------------------------|--------------|--------|
| CPU speed | AT bus clock | JP3 |
| 25MHz | 8.33MHz | Open |
| 33MHz | 8.33MHz | Closed |
| 40MHz | 10MHz | Closed |