


**FLYTECH TECHNOLOGY (U.S.A.), INC.**  
**CARRY I 5200**

<b>Processor</b>	80286
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	Headland
<b>Max. onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	240mm x 220mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, serial ports (2), VGA port
<b>NPU Options</b>	80287

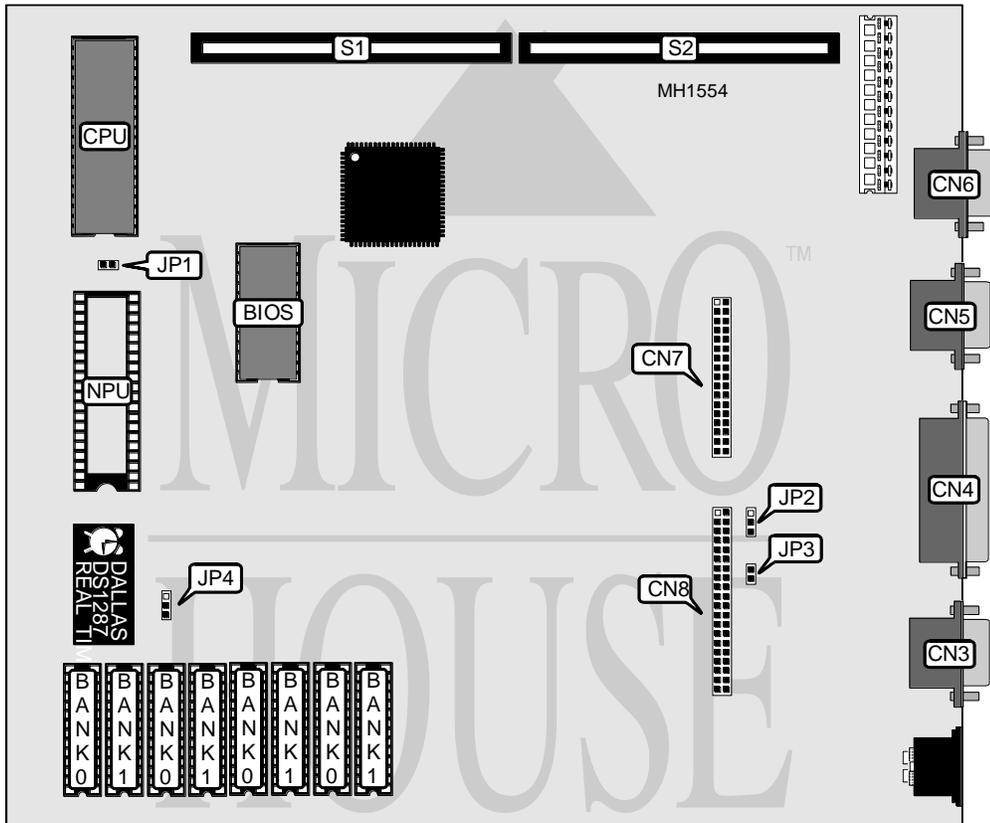

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN3	Serial port (COM1)	CN6
Parallel port	CN4	Floppy drive interface	CN7
Serial port (COM2)	CN5	IDE interface LED	CN8

Continued on next page . . .

# FLYTECH TECHNOLOGY (U.S.A.), INC.

## CARRY I 5200

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU synchronous with CPU	JP1	Open
Asynchronous NPU (clock must be 0.7 to 1.6x CPU clock)	JP1	Closed
í Onboard VGA circuit enabled	JP2	pins 1 & 2 closed
Onboard VGA circuit disabled	JP2	pins 2 & 3 closed
í 16-bit video ROM access	JP3	Open
8-bit video ROM access	JP3	Closed
í DMA bus master select for HT18C controller chip	JP4	pins 1 & 2 closed
DMA bus master select for HT18 controller chip	JP4	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 44256	(4) 44256
2MB	(4) 441000	None
4MB	(4) 441000	(4) 441000