


UNIDENTIFIED OPTI-486WB (VERSION 2)

Processor 80486SX/80486DX
Processor Speed 33MHz
Chip Set OPTI
Max. onboard DRAM 32MB
Cache 64/128/256/512KB
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options 4167

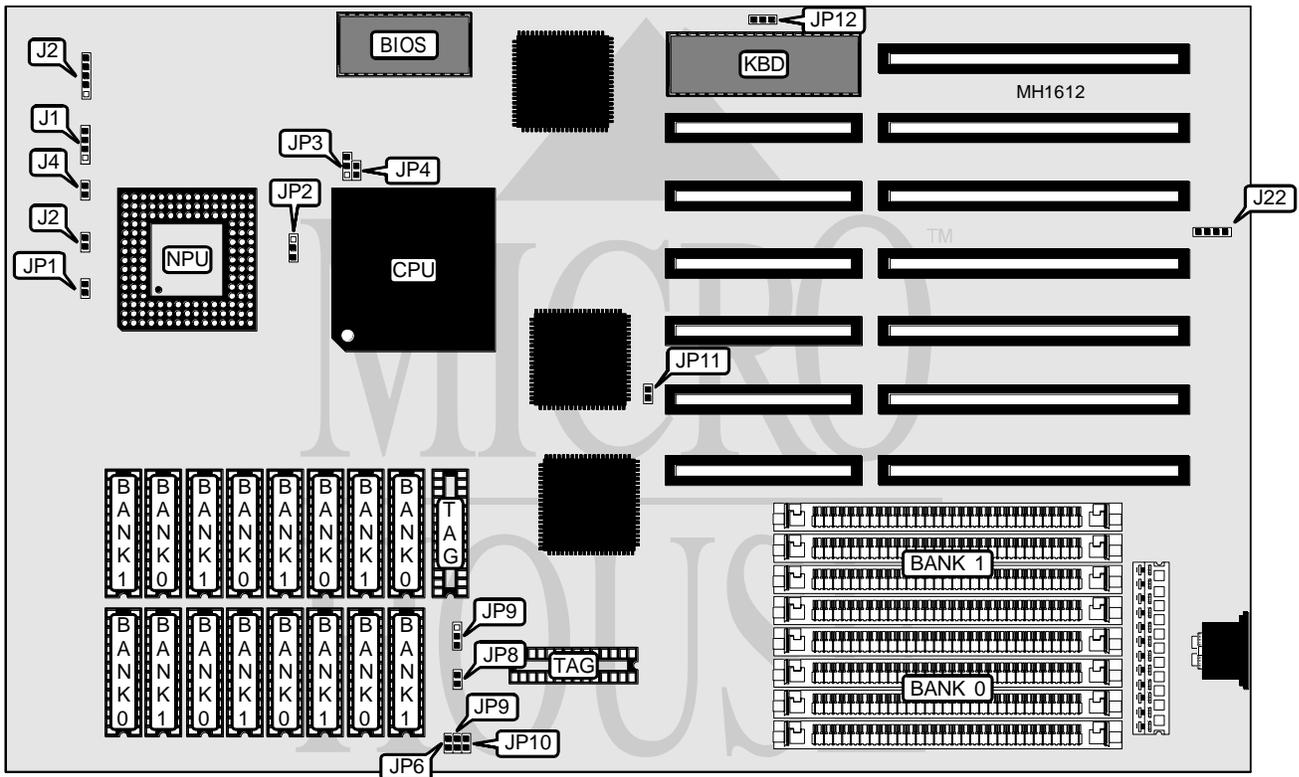

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Reset switch	J4
Turbo switch	J2	External battery	J22
Power LED & keylock	J3	Turbo LED	JP1

Continued on next page . . .

UNIDENTIFIED

OPTI-486WB (VERSION 2)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP12	Closed
Monitor type select monochrome	JP12	Open
í Factory configured - do not alter	JP11	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG U34	TAG U35
64KB	(8) 8K x 8	NONE	NONE	8K x 8
128KB	(8) 8K x 8	(8) 8K x 8	NONE	8K x 8
256KB	(8) 32K x 8	NONE	NONE	8K x 8
512KB	(8) 32K x 8	(8) 32K x 8	8K x 8	8K x 8

CACHE JUMPER CONFIGURATION					
Size	JP6	JP7	JP8	JP9	JP10
64KB	Open	pins 2 & 3	Open	Open	Open
128KB	Closed	pins 2 & 3	Open	Open	Closed
256KB	Closed	pins 2 & 3	Open	Closed	Closed
512KB	Closed	pins 1 & 2	Closed	Closed	Closed

Note: Pins designated should be in the closed position.

CPU TYPE CONFIGURATION			
Type	JP2	JP3	JP4
80486DX	pins 1 & 2 closed	pins 2 & 3 closed	Closed
80486SX	Open	pins 1 & 2 closed	Open