


# UNIDENTIFIED

## 386-25B (VERSION 2)

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	360mm x 240mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	80387/3167

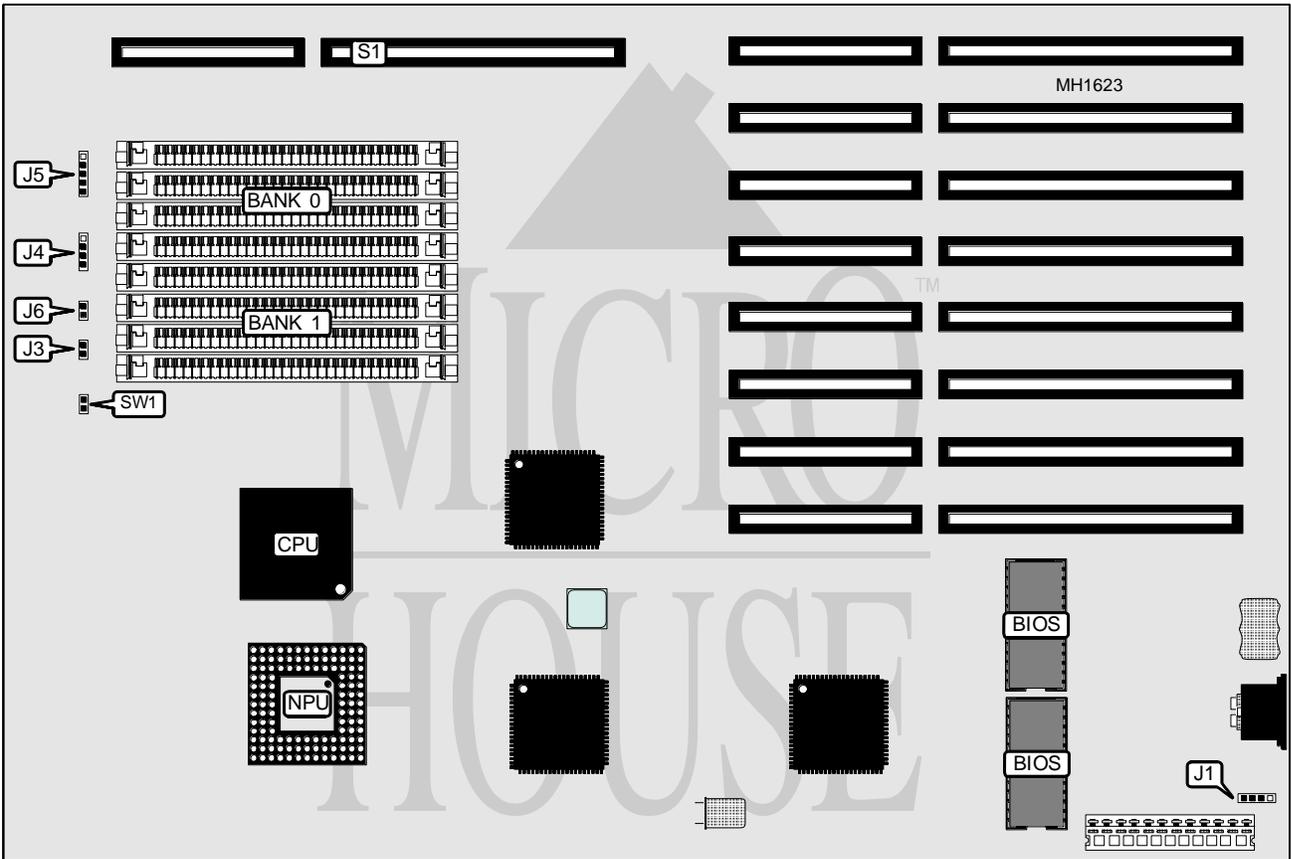

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	J6
Speaker	J4	32-bit external memory card	S1
Turbo switch	J3	Reset switch	SW1
Power LED & keylock	J5		

Continued on next page . . .

## UNIDENTIFIED

## 386-25B (VERSION 2)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J2	Closed
Monitor type select monochrome	J2	Open
Note: The location of J2 is unknown.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9