


GIGA-BYTE TECHNOLOGY CO., LTD

3 8 6 - 4 0 P M

Processor 80386DX
Processor Speed 33/40MHz
Chip Set Unidentified
Max. Onboard DRAM 32MB
Cache 64/128/256KB
BIOS AMI
Dimensions 254mm x 218mm
I/O Options None
NPU Options 80387DX

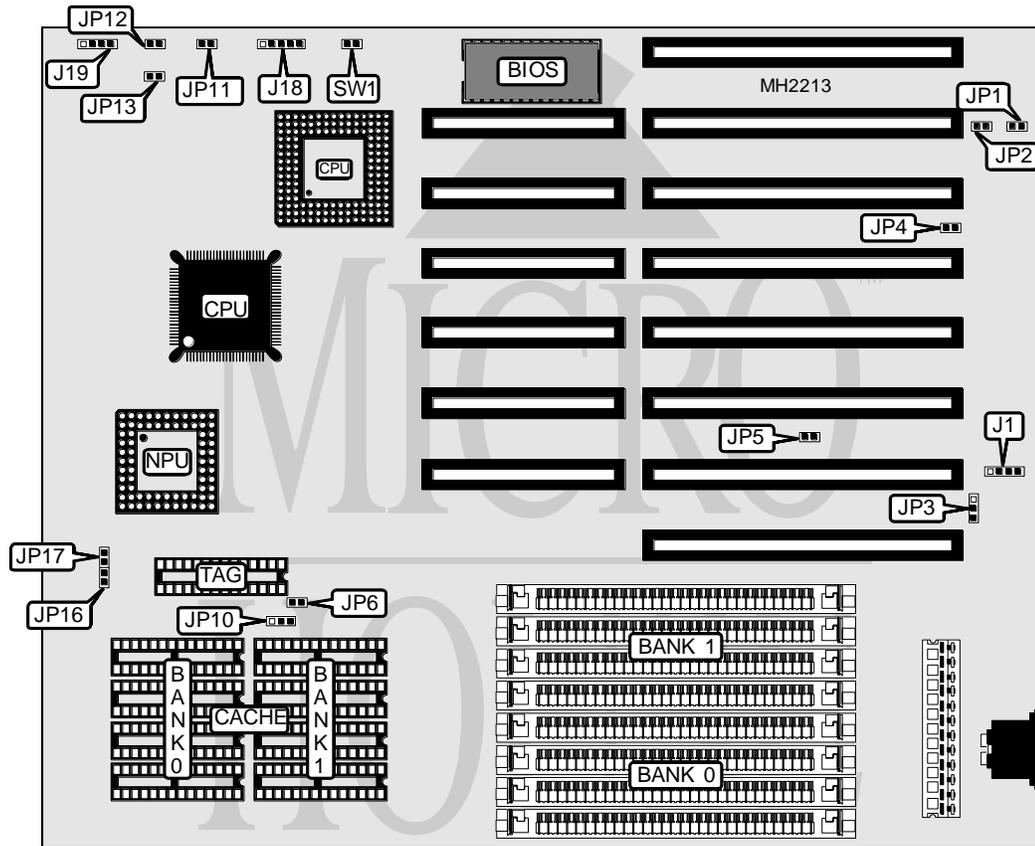

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo switch	JP11
Power LED & keylock	J18	Turbo LED	JP12
Speaker	J19	Reset switch	SW1

Continued next page. . .

GIGA-BYTE TECHNOLOGY CO., LTD

386-40PM

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í I/O bus speed select ATCLK/4	JP2	Closed
I/O bus speed select ATCLK/5	JP2	Open
í CMOS memory normal operation	JP3	pins 2 & 3 closed
CMOS memory clear	JP3	pins 1 & 2 closed
í Monitor type select CGA	JP4	Closed
Monitor type select all others	JP4	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP6	JP10	JP16	JP17
64KB	Open	pins 2 & 3 closed	Open	Open
128KB	Closed	pins 1 & 2 closed	Closed	Open
256KB	Closed	pins 2 & 3 closed	Closed	Closed

CPU TYPE CONFIGURATION			
Type	JP1	JP5	JP13
80386DX	Open	Open	Open
CX486DLC	Closed	Closed	Closed