


UNIDENTIFIED ZERO-WAIT 286 TURBO

Processor	80286
Processor Speed	12MHz
Chip Set	VLSI
Max. onboard DRAM	4MB
Cache	None
BIOS	Unknown
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

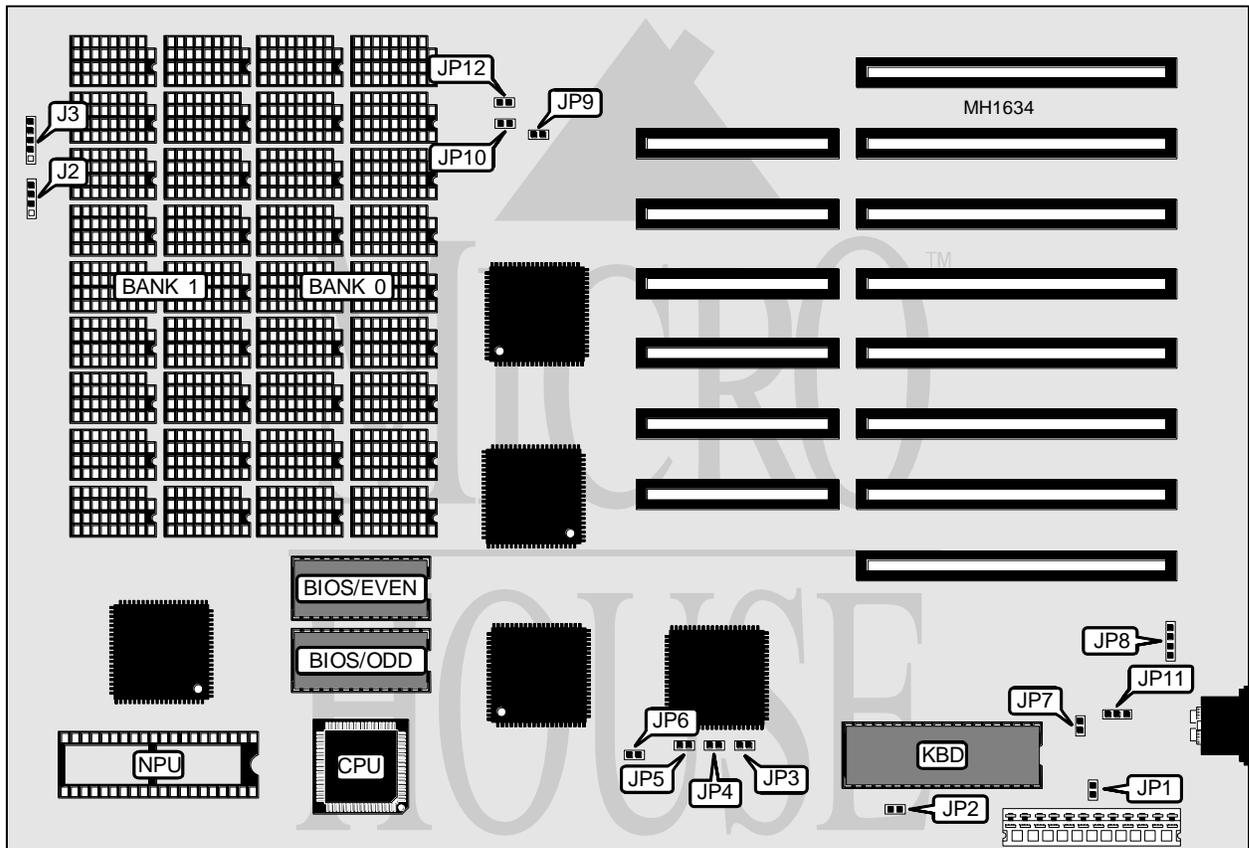

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J2	External battery	JP8
Power LED & keylock	J3	Turbo Switch	JP10
Zero-wait LED	JP6	Turbo LED	JP12
Reset switch	JP7		

Continued on next page . . .

UNIDENTIFIED

ZERO-WAIT 286 TURBO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í RAM select 0 wait states	JP2	Closed
RAM select 1 wait state	JP2	Open
í BIOS type select 27256	JP9	Closed
BIOS type select 27128	JP9	Open
í Battery type select external	JP11	pins 1 & 2 closed
Battery type select internal	JP11	pins 2 & 3 closed

DRAM CONFIGURATION					
Size	Bank 0	Bank 1	JP3	JP4	JP5
512KB	(18) 41256	NONE	Open	Open	Open
640KB	(18) 41256	(18) 4164	Closed	Open	Open
1024KB	(18) 41256	(18) 41256	Open	Closed	Open
2048KB	(18) 411000	NONE	Closed	Closed	Open
2560KB	(18) 411000	(18) 41256	Open	Open	Closed
4096KB	(18) 411000	(18) 411000	Open	Open	Closed