


UNIDENTIFIED

SAM/10 ACM-2031

Processor	80286
Processor Speed	10MHz
Chip Set	Unknown
Max. onboard DRAM	1MB
Cache	None
BIOS	Unknown
Dimensions	325mm x 308mm
I/O Options	None
NPU Options	80287

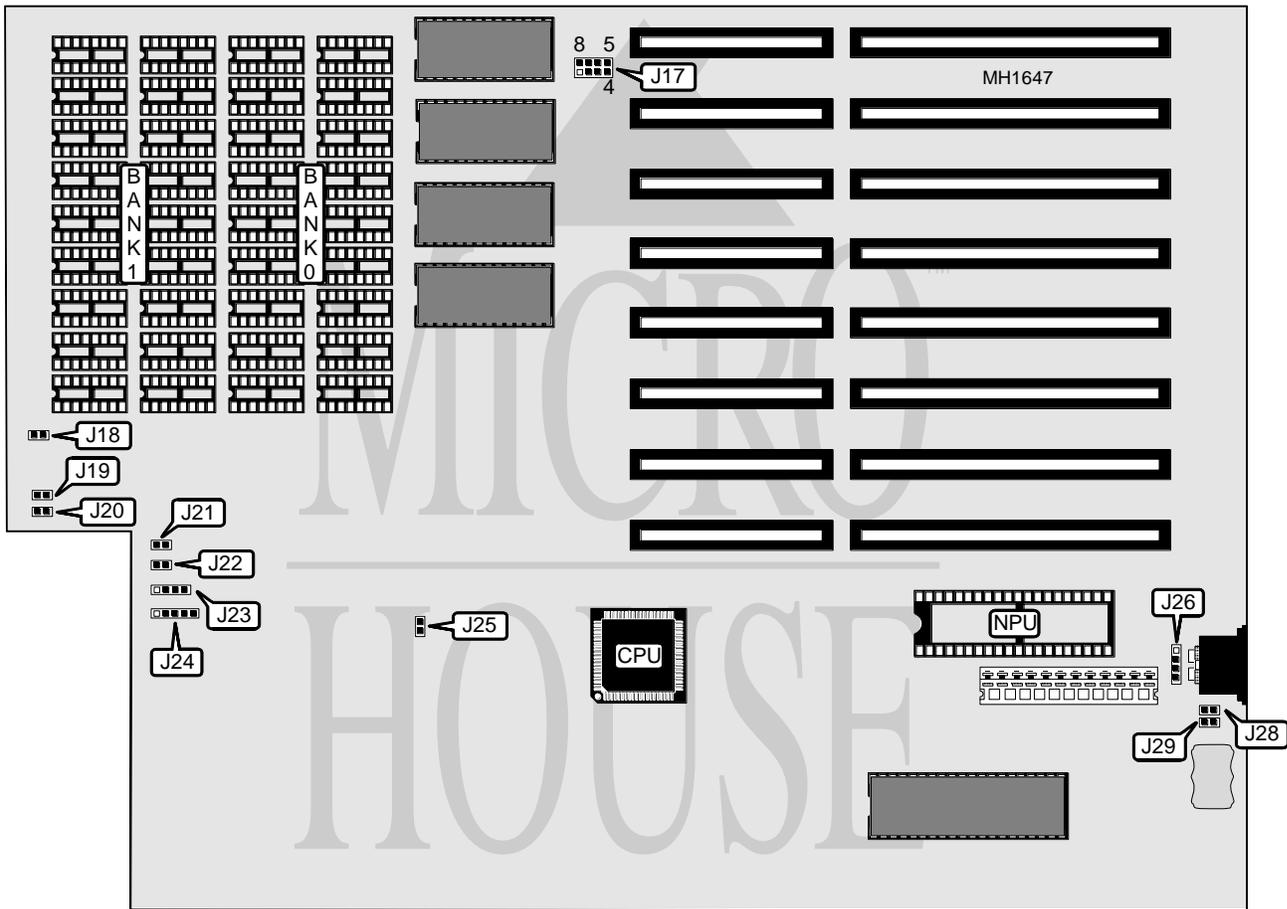

CONNECTIONS			
Purpose	Location	Purpose	Location
Wait state LED	J18	Power LED & keylock	J24
Turbo LED	J20	Turbo Switch	J25
External battery	J26	Reset switch	J29
Speaker	J23		

Continued on next page . . .

UNIDENTIFIED

SAM/10 ACM-2031

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í BIOS type select 27128	J17	pins 1 & 8, 2 & 7 closed
BIOS type select 27256	J17	pins 3 & 6, 4 & 5 closed
í Select 0 wait states	J19	Closed
Select 1 wait state	J19	Open
í Monitor type select color	J28	Closed
Monitor type select monochrome	J28	Open

DRAM CONFIGURATION			
Base memory	EMS	Bank 0	Bank 1
512KB	0KB	(18) 41256	NONE
640KB	0KB	(18) 41256	(18) 4164
512KB	512KB	(18) 41256	(18) 41256
640KB	384KB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION			
Base memory	EMS	J21	J22
512KB	0KB	Off	On
640KB	0KB	On	On
512KB	512KB	On	Off
640KB	384KB	Off	Off