


UNIDENTIFIED

ISA - 486

Processor	80486SX/80487SX/80486DX/ODP486SX/80486DX2
Processor Speed	16/20/25/33/40/50(internal)/50/66(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	32MB
Cache	64/128/256KB
BIOS	AMI
Dimensions	254mm x 220mm
I/O Options	32-bit VESA local bus slots (2)
NPU Options	None

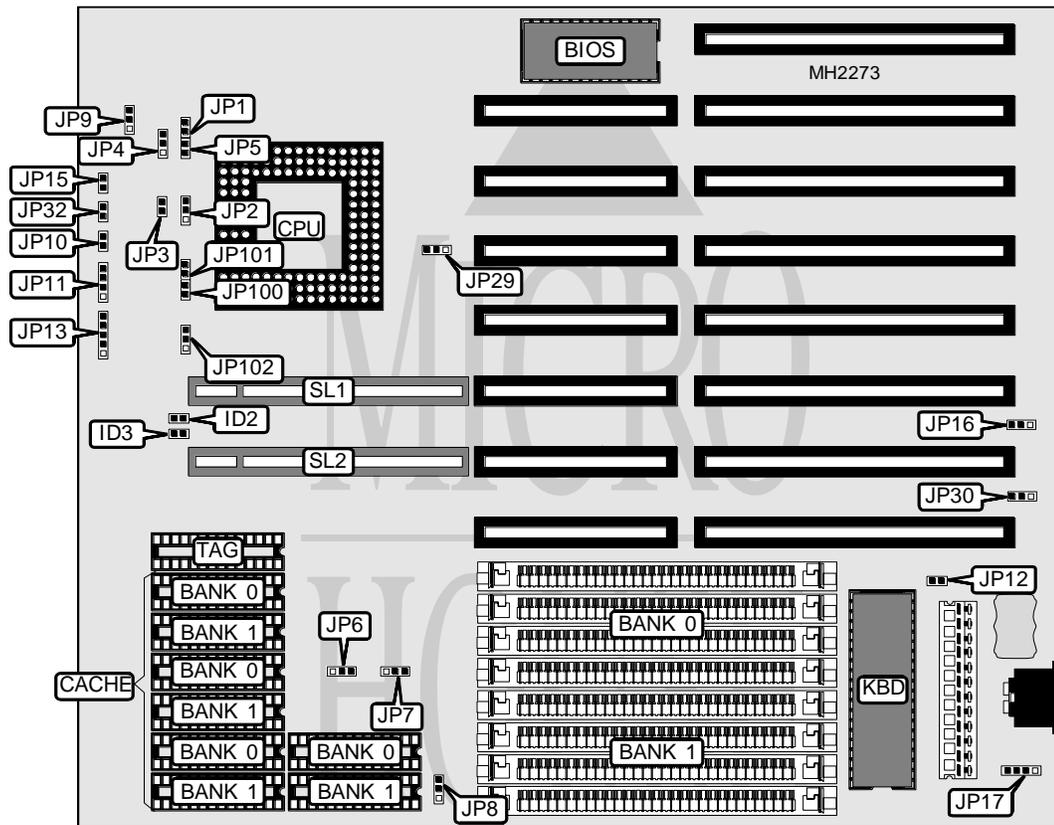

CONNECTIONS

Purpose	Location	Purpose	Location
Turbo LED	JP10	External battery	JP17
Speaker	JP11	Turbo switch	JP32
Power LED & keylock	JP13	32-bit VESA local bus slots	SL1 & SL2
Reset switch	JP15		

Continued on next page. . .

UNIDENTIFIED

ISA - 486

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	ID2	Closed
í Factory configured - do not alter	JP1	Open
í Factory configured - do not alter	JP9	pins 1 & 2 closed
í Monitor type select color	JP12	Closed
Monitor type select monochrome	JP12	Open
í CMOS memory normal operation	JP16	pins 1 & 2 closed
CMOS memory clear	JP16	pins 2 & 3 closed
í Factory configured - do not alter	JP29	pins 1 & 2 closed
í Factory configured - do not alter	JP100	Open
í Factory configured - do not alter	JP101	Open
í Factory configured - do not alter	JP102	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	JP6	JP7	JP8
64KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed
128KB	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
256KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed

CPU TYPE CONFIGURATION				
Type	JP2	JP3	JP4	JP5
80486SX	pins 1 & 2 closed	Open	Open	Open
80487SX	pins 2 & 3 closed	Closed	pins 1 & 2 closed	Closed
80486DX/DX2	pins 2 & 3 closed	Closed	pins 2 & 3 closed	Open

Continued on next page. . .

UNIDENTIFIED

ISA - 486

... continued from previous page

CPU SPEED CONFIGURATION	
Speed	JP30
16MHz	pins 2 & 3 closed
20MHz	pins 2 & 3 closed
25MHz	pins 2 & 3 closed
33MHz	pins 1 & 2 closed
50MHz	pins 2 & 3 closed
50MHz	pins 1 & 2 closed
66MHz	pins 1 & 2 closed

BUS SPEED CONFIGURATION	
CPU speed	ID3
<= 33MHz	Open
> 33MHz	Closed