


TANDY/RADIO SHACK TANDY 3000

Processor	80286
Processor Speed	8MHz
Chip Set	C & T
Max. onboard DRAM	1MB
Cache	None
BIOS	Phoenix
Dimensions	325mm x 308mm
I/O Options	None
NPU Options	80287

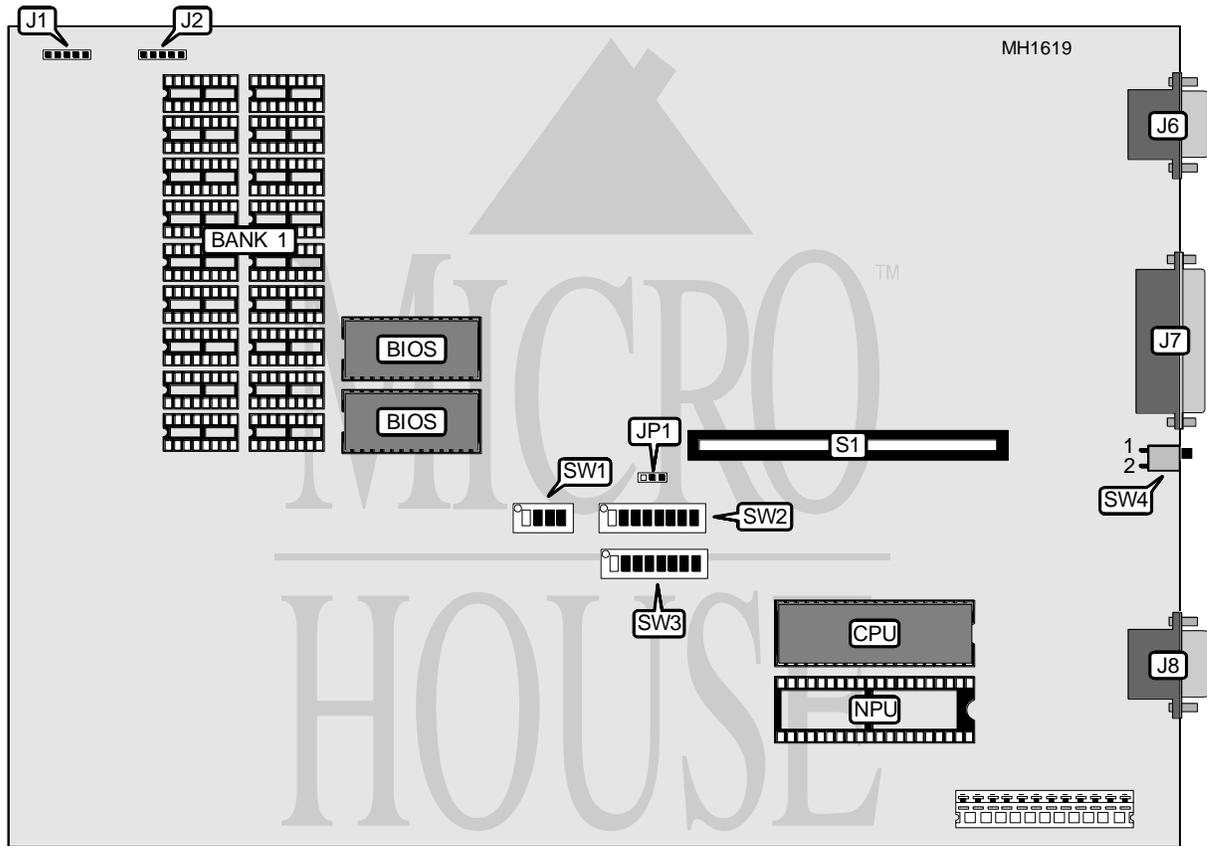

USER CONFIGURABLE SETTINGS		
Function	JUMPER	Position
í Monitor type select color	E3 & E4	Closed
Monitor type select monochrome	E2 & E3	Closed
í Base Memory select 512KB	E13 & E14	Open
Base Memory select 640KB	E13 & E14	Closed

Continued on next page . . .

TANDY/RADIO SHACK**TANDY 3000***... continued from previous page*

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

Note: Bank 0 is soldered on the main board.

BIOS CONFIGURATION	
Size	E5 - E12
27128	E5 & E9, and E7 & E11 closed
27256	E6 & E10, and E8 & E12 closed