


CHAINTECH COMPUTER COMPANY, LTD.

325AX/333AX/325AXB/333AXB

Processor 80386SX/CX486SLC
Processor Speed 25/33MHz
Chip Set ALI
Max. Onboard DRAM 16MB
Cache None
BIOS AMI
Dimensions 220mm x 190mm
I/O Options None
NPU Options 80387SX/CX487SLC

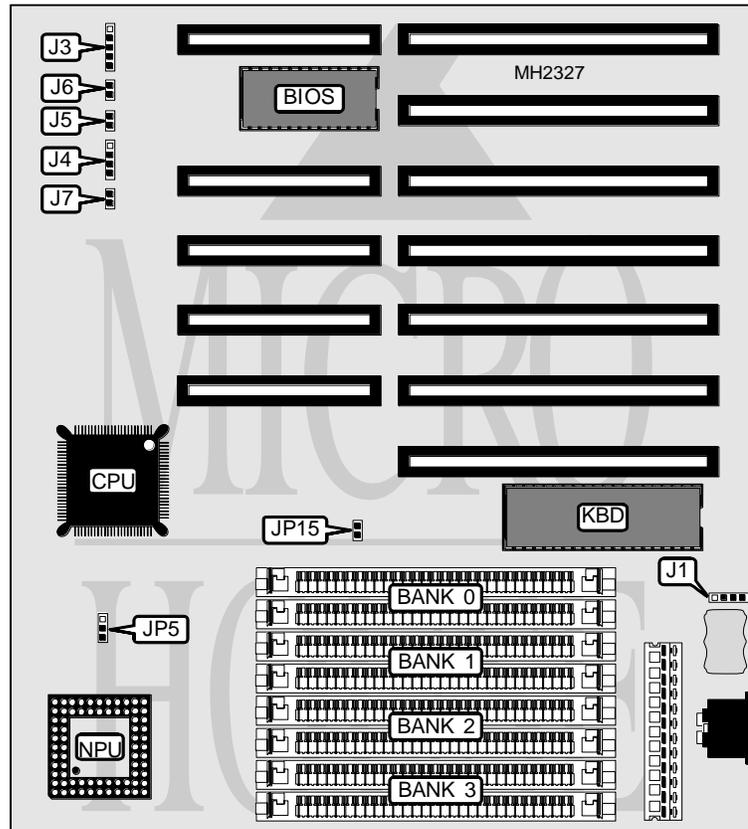

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	J5
Power LED & keylock	J3	Turbo switch	J6
Speaker	J4	Reset switch	J7

Continued on next page. . .

CHAINTECH COMPUTER CO. LTD.

325AX/333AX/325AXB/333AXB

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Turbo enabled	J6	Closed
Turbo disabled	J6	Open
í NPU synchronous with CPU	JP5	pins 1 & 2 closed
NPU asynchronous with CPU	JP5	pins 2 & 3 closed
í Parity check enabled	JP15	Open
Parity check disabled	JP15	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE