


HEWLETT-PACKARD COMPANY VECTRA 486/U

Processor	80486SX/80487SX/80486DX/80486DX2
Processor Speed	25/33/50(internal)/66(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	32MB
Cache	128KB (location unknown)
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	Bus mouse port, floppy drive interface, IDE interface, parallel port, serial ports (2), VGA port, VESA feature connector
NPU Options	None

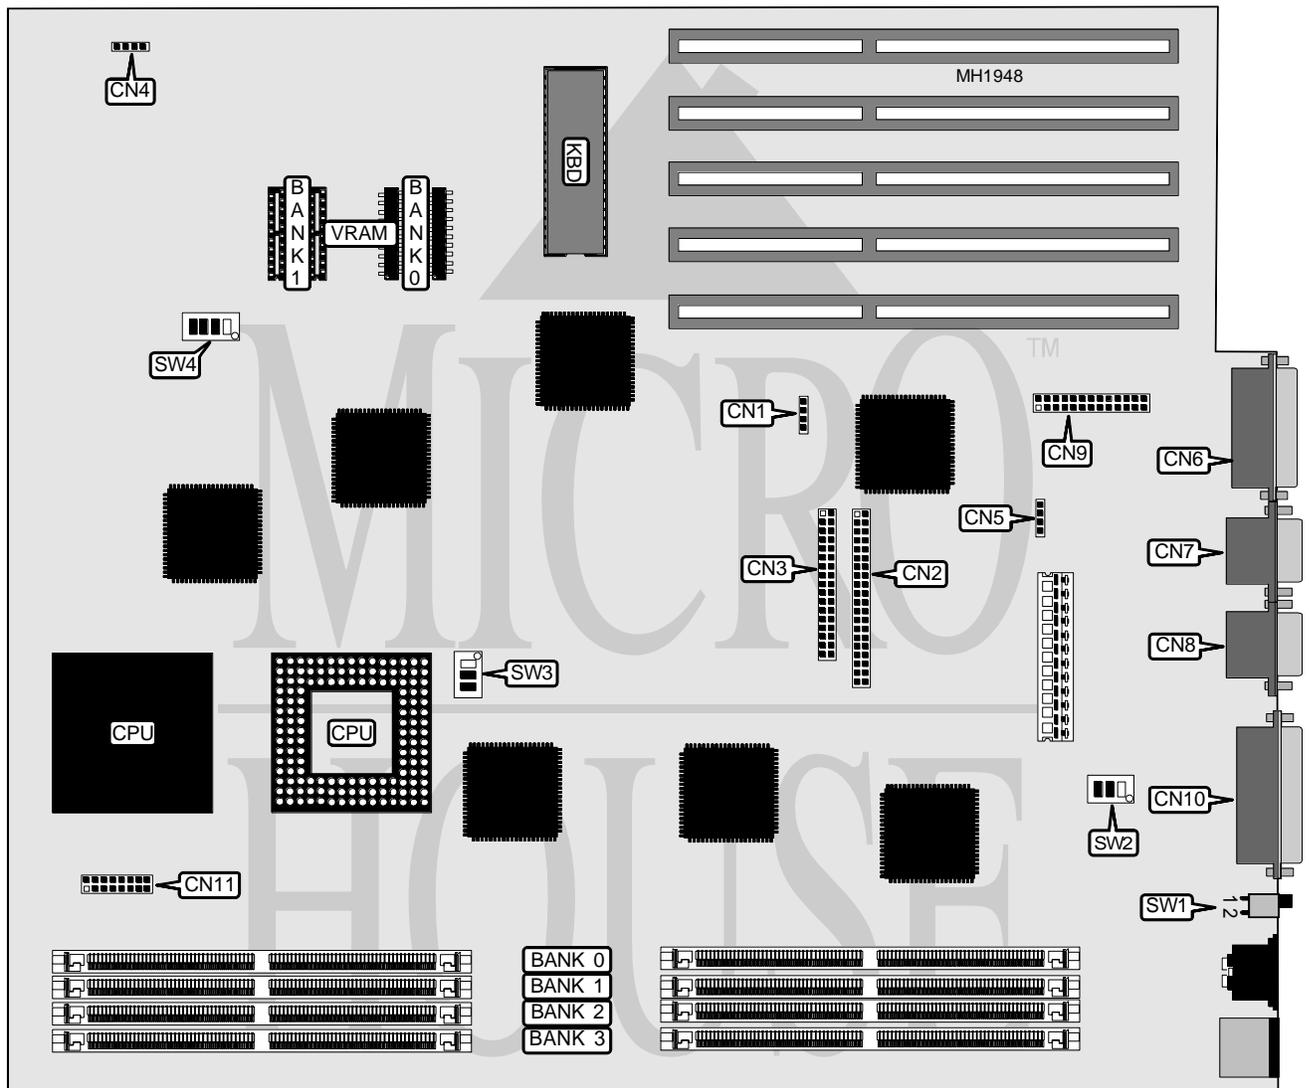

Continued next page...

HEWLETT-PACKARD COMPANY

VECTRA 486/U

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	CN1	Serial port 2	CN7
Floppy drive interface	CN2	Serial port 1	CN8
Hard drive interface	CN3	VESA feature connector	CN9
Speaker	CN4	Parallel port	CN10
External battery	CN5	Control panel	CN11
VGA port	CN6	BIOS lock switch	SW1

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
Factory configured - do not alter	SW4/switch 2	Off
Factory configured - do not alter	SW4/switch 3	Off
Built in video disabled	SW4/switch 4	On
Built in video enabled	SW4/switch 4	Off

CPU SPEED SELECTION-- INTEL CPU			
Speed	SW3/switch 1	SW3/switch 2	SW3/switch 3
25MHz	Off	Off	Off
33MHz	On	On	On
50iMHz	On	On	Off
66iMHz	On	On	On

CPU SPEED SELECTION-- HEWLETT PACKARD CPU			
Speed	SW3/switch 1	SW3/switch 2	SW3/switch 3
25MHz	On	Off	Off
33MHz	On	Off	On
50iMHz	On	Off	Off
66iMHz	On	Off	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 4
4MB	(2) 512K x 36	NONE	NONE	NONE
8MB	(2) 512K x 36	(2) 512K x 36	NONE	NONE
16MB	(2) 512K x 36			
20MB	(2) 2M x 36	(2) 512K x 36	NONE	NONE
24MB	(2) 2M x 36	(2) 512K x 36	(2) 512K x 36	NONE
28MB	(2) 2M x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
32MB	(2) 2M x 36	(2) 2M x 36	NONE	NONE
36MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	NONE
48MB	(2) 2M x 36	(2) 8M x 36	(2) 8M x 36	NONE
52MB	(2) 2M x 36			
64MB	(2) 2M x 36			

Continued next page...

HEWLETT-PACKARD COMPANY

VECTRA 486/U

... continued from previous page

PASSWORD AND CONFIGURATION SWITCHES			
SW2	Function	Closed	Open
1	Clear configuration	Clear CMOS	Retain CMOS
2	Erase power-on password	Erase password	Retain password
3	Lock configuration	No configuration change	Configuration can change

VIDEO CONFIGURATION			
Size	Bank 0	Bank 1	SW4/1
512KB	(2) 256K x 4	NONE	OFF
1MB	(2) 256K x 4	(2) 256K x 4	ON