


RELIALOGIC CORPORATION PRIVATE, LTD.

R 3 8 6 S X M B C

Processor	80386SX
Processor Speed	16/25MHz
Chip Set	C & T
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	220mm x 218mm
I/O Options	Floppy drive interface, IDE interface
NPU Options	80387SX

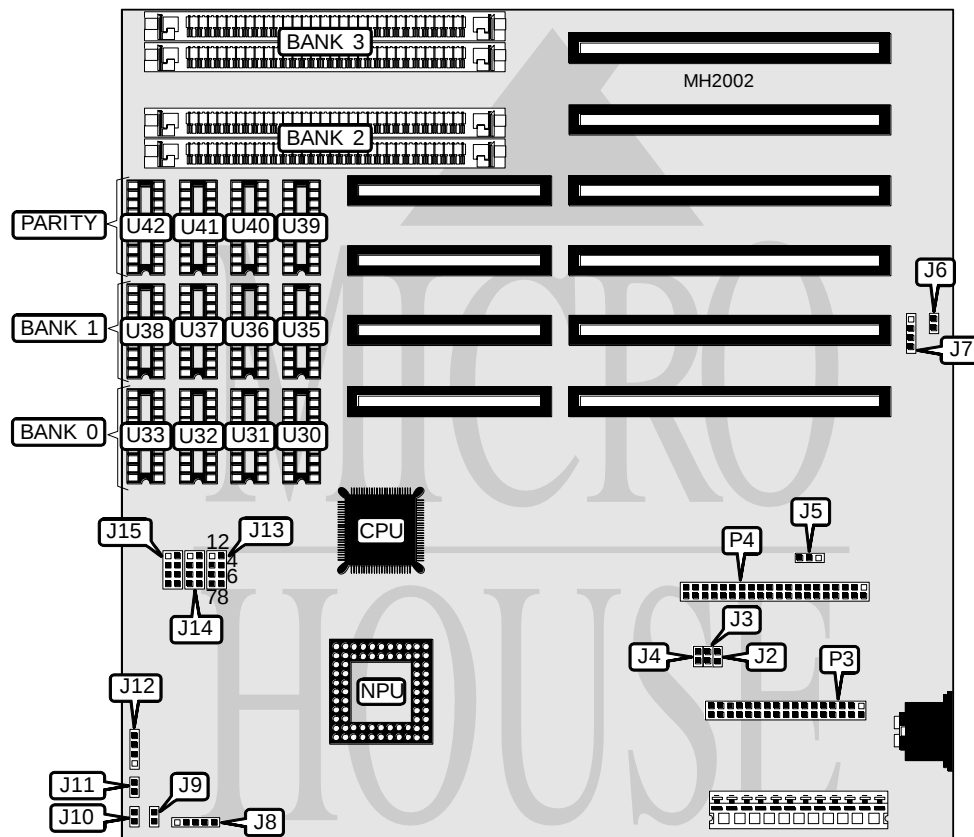

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J7	Turbo LED	J11
Power LED & keylock	J8	Speaker	J12
Reset switch	J9	Floppy drive interface	P3
Turbo switch	J10	IDE interface	P4

Continued next page...

RELIALOGIC CORPORATION PRIVATE, LTD.

R 3 8 6 S X M B C

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Floppy drive interface enabled	J2	Closed
Floppy drive interface disabled	J2	Open
í IDE interface enabled	J3	Closed
IDE interface disabled	J3	Open
í Factory configured - do not alter	J4	Open
í Monitor type select CGA/EGA/VGA	J5	pins 1 & 2 closed
Monitor type select monochrome	J5	pins 2 & 3 closed
í Battery type select internal	J6	Closed
Battery type select external	J6	Open

DRAM CONFIGURATION (DIPP & SIMM RAM)					
Size	Bank 0	Bank 1	Parity Chip	Bank 2	Bank 3
512KB	(2) 44256	(2) 44256	(2) 41256	NONE	NONE
1MB	(4) 44256	(4) 44256	(4) 41256	NONE	NONE
1.5MB	(4) 44256	(4) 44256	(4) 41256	(2) 256K x 9	NONE
2MB	(4) 44256	(4) 44256	(4) 41256	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	(2) 1M x 9	NONE
3MB	(4) 44256	(4) 44256	(4) 41256	(2) 1M x 9	(2) 256K x 9
4MB	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9
5MB	(4) 44256	(4) 44256	(4) 41256	(2) 1M x 9	(2) 1M x 9
9MB	(4) 44256	(4) 44256	(4) 41256	(2) 4M x 9	NONE
16MB	NONE	NONE	NONE	(2) 4M x 9	(2) 4M x 9
Note: When installing 512KB, only U32, U33, U37, U38,U41 & U42 are used.					

DRAM JUMPER CONFIGURATION					
Bank 0	Bank 1	Parity Chip	Bank 2	Bank 3	J13, J14 & J15
(2) 44256	(2) 44256	(2) 41256	NONE	NONE	1 & 2, 3 & 4, 5 & 6, 7 & 8
(4) 44256	(4) 44256	(4) 41256	NONE	NONE	1 & 2, 3 & 4, 5 & 6, 7 & 8
(4) 44256	(4) 44256	(4) 41256	(2) 256K x 9	NONE	1 & 2, 3 & 4, 5 & 6, 7 & 8
(4) 44256	(4) 44256	(4) 41256	(2) 256K x 9	(2) 256K x 9	1 & 2, 3 & 4, 5 & 6, 7 & 8
NONE	NONE	NONE	(2) 1M x 9	NONE	1 & 3, 2 & 4, 5 & 7, 6 & 8
(4) 44256	(4) 44256	(4) 41256	(2) 1M x 9	(2) 256K x 9	1 & 2, 3 & 4, 5 & 6, 7 & 8
NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9	1 & 3, 2 & 4, 5 & 7, 6 & 8
(4) 44256	(4) 44256	(4) 41256	(2) 1M x 9	(2) 1M x 9	1 & 2, 3 & 4, 5 & 6, 7 & 8
(4) 44256	(4) 44256	(4) 41256	(2) 4M x 9	NONE	1 & 2, 3 & 4, 5 & 6, 7 & 8
NONE	NONE	NONE	(2) 4M x 9	(2) 4M x 9	1 & 3, 2 & 4, 5 & 7, 6 & 8
Note: Pins designated should be in the closed position.					