


# UNIDENTIFIED

## UNI-486WB

Processor	80486SX/80486DX/80486DX2
Processor Speed	25/33/50(internal)/50/66(internal)MHz
Chip Set	UNI
Max. Onboard DRAM	32MB
Cache	32/64/128/256KB
BIOS	AMI
Dimensions	230mm x 218mm
I/O Options	None
NPU Options	4167

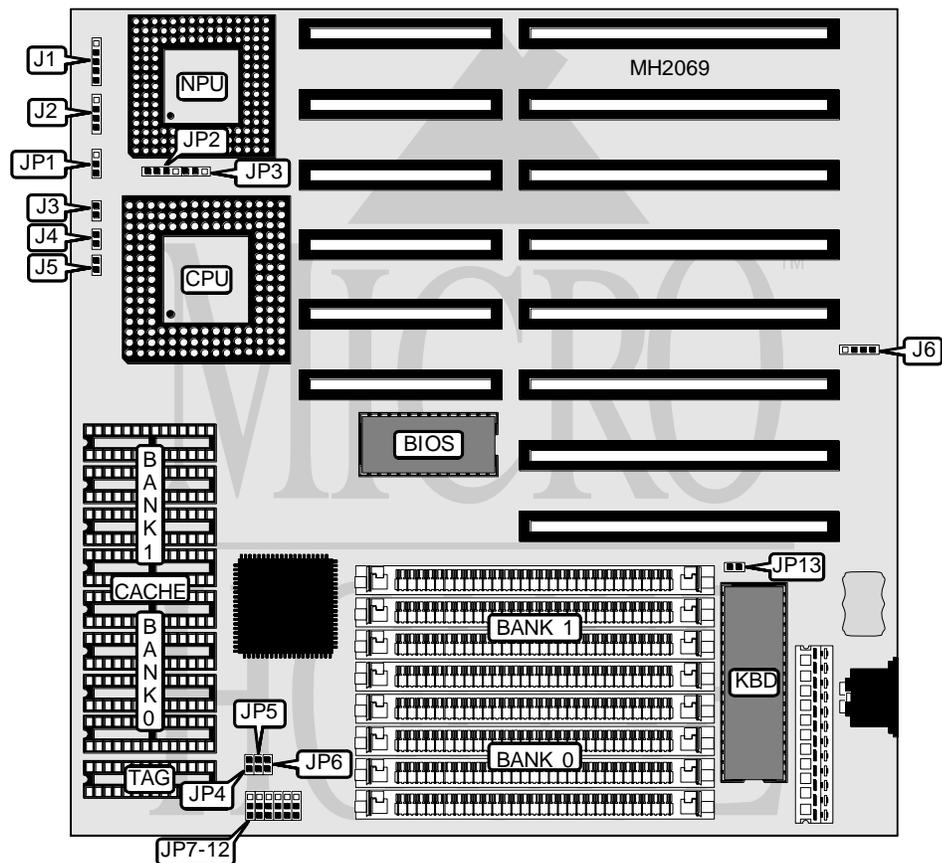

### CONNECTIONS

Purpose	Location	Purpose	Location
Power LED & keylock	J1	Turbo switch	J4
Speaker	J2	Reset switch	J5
Turbo LED	J3	External battery	J6

Continued on next page . . .

# UNIDENTIFIED

## UNI - 486WB

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Turbo mode disabled	J4	Open
Turbo mode enabled	J4	Closed
í Battery type select internal	J6	pins 2 & 3 closed
Battery type select external	J6	pins 1, 2, 3 & 4 closed
í Normal A20 enabled	JP3	pins 2 & 3 closed
Fast A20 enabled	JP3	pins 1 & 2 closed
í Monitor type select monochrome	JP13	Open
Monitor type select color	JP13	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
32KB	(4) 8K x 8	NONE	(1) 8K x 8
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP4	JP5	JP6	JP7
32KB	Open	Open	Open	pins 1 & 2 closed
64KB	Closed	Open	Open	pins 2 & 3 closed
128KB	Closed	Open	Closed	pins 2 & 3 closed
256KB	Closed	Closed	Closed	pins 2 & 3 closed

CACHE JUMPER CONFIGURATION					
Size	JP8	JP9	JP10	JP11	JP12
32KB	Open	1 & 2	2 & 3	2 & 3	2 & 3
64KB	Open	2 & 3	1 & 2	2 & 3	2 & 3
128KB	1 & 2	2 & 3	2 & 3	1 & 2	2 & 3
256KB	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page . . .

---

**UNIDENTIFIED**  
**UNI-486WB***... continued from previous page.*

CPU TYPE CONFIGURATION		
Type	JP1	JP2
80486SX	Open	pins 2 & 3 closed
80486DX/DX2	pins 1 & 2 closed	pins 1 & 2, 3 & 4 closed