


REPLY CORPORATION

POWERBOARD 56/57 & 76/77

Processor	80486SX2/80486DX2/80486DX4/Pentium Overdrive
Processor Speed	25/33/50(internal)/66(internal)/100(internal)MHz
Chip Set	IBM
Max. Onboard DRAM	64MB
Cache	Unidentified
BIOS	Reply
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, SCSI interface (2), 32-bit MCA riser card, parallel port, PS/2 mouse port, serial port, VGA port, Cache card slot
NPU Options	None

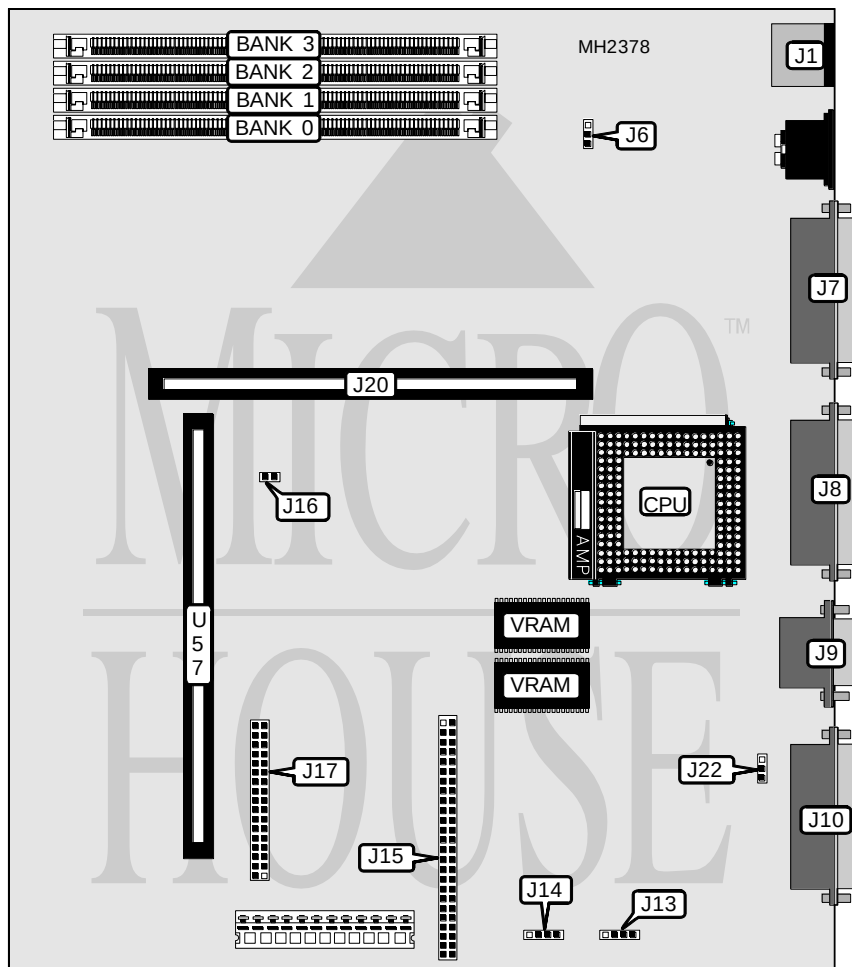

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	J1	Drive power	J14
Parallel port	J7	Internal SCSI interface	J15
Serial port	J8	Floppy drive interface	J17
VGA port	J9	32-bit MCA riser card	J20
External SCSI interface	J10	Secondary cache	U57
Panel connector	J13		

Continued on next page...

REPLY CORPORATION

POWERBOARD 56/57 & 76/77

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J6	pins 2 & 3 closed
CMOS memory clear	J6	pins 1 & 2 closed
í SCSI termination internal	J22	pins 1 & 2 closed
SCSI termination external	J22	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 1M x 36	NONE	NONE	NONE
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
8MB	(1) 2M x 36	NONE	NONE	NONE
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
12MB	(1) 2M x 36	(1) 1M x 36	NONE	NONE
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	NONE
16MB	(1) 2M x 36	(1) 2M x 36	NONE	NONE
16MB	(1) 4M x 36	NONE	NONE	NONE
20MB	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
20MB	(1) 2M x 36	(1) 2M x 36	(1) 1M x 36	NONE
20MB	(1) 4M x 36	(1) 1M x 36	NONE	NONE
24MB	(1) 2M x 36	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36
24MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	NONE
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	NONE
24MB	(1) 4M x 36	(1) 2M x 36	NONE	NONE
28MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	(1) 1M x 36
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
28MB	(1) 4M x 36	(1) 2M x 36	(1) 1M x 36	NONE
32MB	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
32MB	(1) 4M x 36	(1) 2M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	NONE
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
32MB	(1) 8M x 36	NONE	NONE	NONE
36MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	(1) 1M x 36
36MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	NONE
36MB	(1) 8M x 36	(1) 1M x 36	NONE	NONE
40MB	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
40MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36
40MB	(1) 4M x 36	(1) 4M x 36	(1) 2M x 36	NONE
40MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	NONE
40MB	(1) 8M x 36	(1) 2M x 36	NONE	NONE
44MB	(1) 4M x 36	(1) 4M x 36	(1) 2M x 36	(1) 1M x 36
44MB	(1) 8M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
44MB	(1) 8M x 36	(1) 2M x 36	(1) 1M x 36	NONE
48MB	(1) 4M x 36	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
48MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	NONE
48MB	(1) 8M x 36	(1) 4M x 36	NONE	NONE

Continued on next page...

REPLY CORPORATION

POWERBOARD 56/57 & 76/77

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
52MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36
52MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	(1) 1M x 36
52MB	(1) 8M x 36	(1) 4M x 36	(1) 1M x 36	NONE
56MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 2M x 36
56MB	(1) 8M x 36	(1) 2M x 36	(1) 2M x 36	(1) 2M x 36
56MB	(1) 8M x 36	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36
56MB	(1) 8M x 36	(1) 4M x 36	(1) 2M x 36	NONE
60MB	(1) 8M x 36	(1) 4M x 36	(1) 2M x 36	(1) 1M x 36
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
64MB	(1) 8M x 36	(1) 4M x 36	(1) 2M x 36	(1) 2M x 36
64MB	(1) 8M x 36	(1) 4M x 36	(1) 4M x 36	NONE
64MB	(1) 8M x 36	(1) 8M x 36	NONE	NONE

CPU TYPE CONFIGURATION	
CPU	J16
80486SX2	Closed
80486DX2	Open
80486DX4	Open