


FREE COMPUTER TECHNOLOGY, INC.

4 8 6 F 3 8 X

| | |
|--------------------------|--|
| Processor | CX486S/80486SX/80486SX2/80487SX/CX486DX/80486DX/CX486DX2/ 80486DX2/80486DX4/Pentium Overdrive |
| Processor Speed | 25/33/40/50(internal)/50/66(internal)MHz |
| Chip Set | OPTI |
| Max. Onboard DRAM | 64MB |
| Cache | 128/256/512KB |
| BIOS | Award |
| Dimensions | 330mm x 218mm |
| I/O Options | 32-bit VESA local bus slots (3), green PC connector |
| NPU Options | None |

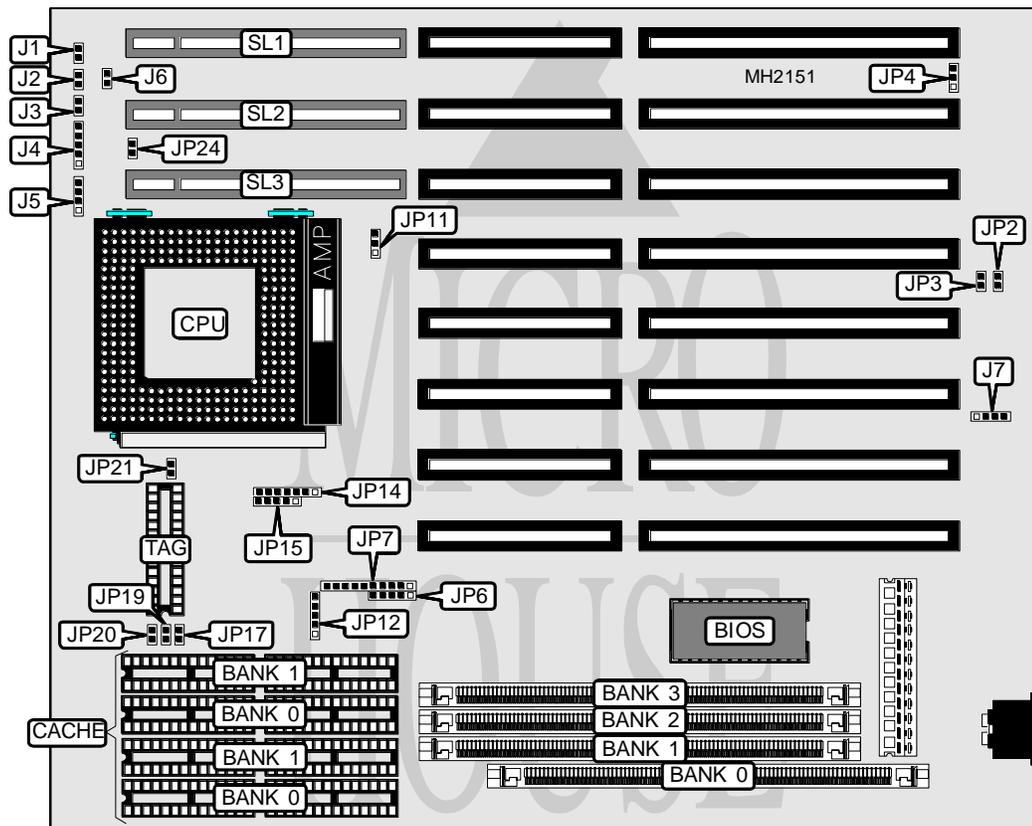

| CONNECTIONS | | | |
|---------------------|----------|-----------------------------|-----------|
| Purpose | Location | Purpose | Location |
| Turbo switch | J1 | Break switch | J6 |
| Turbo LED | J2 | External battery | J7 |
| Reset switch | J3 | Green PC connector | JP2 |
| Power LED & keylock | J4 | Green PC connector | JP3 |
| Speaker | J5 | 32-bit VESA Local bus slots | SL1 - SL3 |

Continued on next page. . .

FREE COMPUTER TECHNOLOGY, INC.
4 8 6 F 3 8 X

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--------------------------------|--------|-------------------|
| Function | Jumper | Position |
| í CMOS memory normal operation | JP4 | pins 2 & 3 closed |
| CMOS memory clear | JP4 | pins 1 & 2 closed |

| DRAM CONFIGURATION | | | | |
|--------------------|---------------|---------------|-------------|-------------|
| Size | Bank 0 | Bank 1 | Bank 2 | Bank 3 |
| 1MB | (1) 256K x 36 | NONE | NONE | NONE |
| 2MB | (1) 256K x 36 | (1) 256K x 36 | NONE | NONE |
| 2MB | NONE | (1) 512K x 36 | NONE | NONE |
| 4MB | (1) 1M x 36 | NONE | NONE | NONE |
| 5MB | (1) 256K x 36 | (1) 1M x 36 | NONE | NONE |
| 6MB | (1) 256K x 36 | (1) 256K x 36 | (1) 1M x 36 | NONE |
| 6MB | NONE | (1) 512K x 36 | (1) 1M x 36 | NONE |
| 8MB | (1) 1M x 36 | (1) 1M x 36 | NONE | NONE |
| 8MB | NONE | (1) 2M x 36 | NONE | NONE |
| 10MB | (1) 256K x 36 | (1) 256K x 36 | (1) 1M x 36 | (1) 1M x 36 |
| 10MB | (1) 256K x 36 | (1) 256K x 36 | NONE | (1) 2M x 36 |
| 10MB | NONE | (1) 512K x 36 | (1) 1M x 36 | (1) 1M x 36 |
| 10MB | NONE | (1) 512K x 36 | NONE | (1) 2M x 36 |
| 12MB | (1) 1M x 36 | (1) 1M x 36 | (1) 1M x 36 | NONE |
| 12MB | NONE | (1) 2M x 36 | (1) 1M x 36 | NONE |
| 16MB | NONE | (1) 2M x 36 | NONE | (1) 2M x 36 |
| 16MB | NONE | (1) 2M x 36 | (1) 1M x 36 | (1) 1M x 36 |
| 16MB | (1) 4M x 36 | NONE | NONE | NONE |
| 16MB | (1) 1M x 36 | (1) 1M x 36 | NONE | (1) 2M x 36 |
| 16MB | (1) 1M x 36 | (1) 1M x 36 | (1) 1M x 36 | (1) 1M x 36 |
| 17MB | (1) 256K x 36 | (1) 4M x 36 | NONE | NONE |
| 18MB | (1) 256K x 36 | (1) 256K x 36 | (1) 4M x 36 | NONE |
| 18MB | NONE | (1) 512K x 36 | (1) 4M x 36 | NONE |
| 20MB | (1) 1M x 36 | (1) 4M x 36 | NONE | NONE |
| 24MB | NONE | (1) 2M x 36 | (1) 4M x 36 | NONE |
| 24MB | (1) 1M x 36 | (1) 1M x 36 | (1) 4M x 36 | NONE |
| 32MB | (1) 4M x 36 | (1) 4M x 36 | NONE | NONE |
| 32MB | NONE | (1) 8M x 36 | NONE | NONE |
| 36MB | (1) 1M x 36 | (1) 4M x 36 | (1) 4M x 36 | NONE |
| 40MB | (1) 1M x 36 | (1) 1M x 36 | (1) 4M x 36 | (1) 4M x 36 |
| 40MB | (1) 1M x 36 | (1) 1M x 36 | NONE | (1) 8M x 36 |
| 40MB | NONE | (1) 2M x 36 | (1) 4M x 36 | (1) 4M x 36 |
| 40MB | NONE | (1) 2M x 36 | NONE | (1) 8M x 36 |
| 48MB | (1) 4M x 36 | (1) 4M x 36 | (1) 4M x 36 | NONE |
| 64MB | (1) 4M x 36 | (1) 4M x 36 | (1) 4M x 36 | (1) 4M x 36 |
| 64MB | (1) 4M x 36 | (1) 4M x 36 | NONE | (1) 8M x 36 |
| 64MB | NONE | (1) 8M x 36 | NONE | (1) 8M x 36 |

Continued on next page...

FREE COMPUTER TECHNOLOGY, INC.

486F38X

... continued from previous page

| CACHE CONFIGURATION | | | |
|---------------------|--------------|-------------|----------------------------|
| Size | Bank 0 | Bank 1 | TAG |
| 128KB | (4) 32K x 8 | NONE | (1) 8K x 8 |
| 256KB | (4) 32K x 8 | (4) 32K x 8 | (1) 16K x 8 or (1) 32K x 8 |
| 256KB | (4) 64K x 8 | NONE | (1) 16K x 8 or (1) 32K x 8 |
| 512KB | (4) 64K x 8 | (4) 64K x 8 | (1) 32K x 8 |
| 512KB | (4) 128K x 8 | NONE | (1) 32K x 8 |

| CACHE JUMPER CONFIGURATION | | |
|----------------------------|--------------------------|--------|
| Size | JP12 | JP21 |
| 128KB | pins 1 & 2 closed | Open |
| 256KB | pins 2 & 3 closed | Open |
| 256KB | pins 1 & 2, 3 & 4 closed | Open |
| 512KB | pins 2 & 3, 4 & 5 closed | Closed |
| 512KB | pins 1 & 2, 3 & 4 closed | Closed |

| CPU TYPE CONFIGURATION | | |
|------------------------|--------------|-----------------------------|
| Type | JP6 | JP7 |
| CX486S | 1 & 2, 3 & 4 | 2 & 3, 4 & 5, 7 & 8, 9 & 10 |
| 80486SX/SX2 | 2 & 3, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |
| CX486DX | 1 & 2, 3 & 4 | 2 & 3, 4 & 5, 7 & 8, 9 & 10 |
| CX486DX2 | 1 & 2, 3 & 4 | 2 & 3, 4 & 5, 7 & 8, 9 & 10 |
| 80486DX/DX2 | 2 & 3, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |
| 80486DX4 (2x) | 2 & 3, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |
| 80486DX4 (2.5x) | 2 & 3, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |
| 80486DX4 (3x) | 2 & 3, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |
| Overdrive | 2 & 3, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |
| Pentium Overdrive | 1 & 2, 4 & 5 | 1 & 2, 3 & 4, 6 & 7, 8 & 9 |

Note: Pins designated should be in the closed position.

| CPU TYPE CONFIGURATION (CON'T) | | | |
|--------------------------------|-------|---------------------|--------------|
| Type | JP11 | JP14 | JP15 |
| CX486S | Open | 2 & 3, 5 & 6 | 3 & 4 |
| 80486SX/SX2 | Open | 2 & 3, 4 & 5, 6 & 7 | 3 & 4 |
| CX486DX | Open | 3 & 4 | 1 & 2, 5 & 6 |
| CX486DX2 | Open | 1 & 2, 5 & 6 | 1 & 2, 3 & 4 |
| 80486DX/DX2 | Open | 1 & 2, 4 & 5, 6 & 7 | 3 & 4 |
| 80486DX4 (2x) | 2 & 3 | 1 & 2, 4 & 5, 6 & 7 | 3 & 4 |
| 80486DX4 (2.5x) | 1 & 2 | 1 & 2, 4 & 5, 6 & 7 | 3 & 4 |
| 80486DX4 (3x) | Open | 1 & 2, 4 & 5, 6 & 7 | 3 & 4 |
| Overdrive | Open | 1 & 2, 4 & 5, 6 & 7 | 3 & 4 |
| Pentium Overdrive | Open | 1 & 2, 4 & 5, 6 & 7 | 4 & 5 |

Note: Pins designated should be in the closed position.

Continued on next page. . .

FREE COMPUTER TECHNOLOGY, INC.
4 8 6 F 3 8 X

... continued from previous page

| CPU SPEED CONFIGURATION | | | |
|--------------------------------|--------|--------|--------|
| Speed | JP17 | JP19 | JP20 |
| 25MHz | Closed | Open | Closed |
| 33MHz | Closed | Closed | Open |
| 40MHz | Open | Open | Closed |
| 50iMHz | Closed | Open | Closed |
| 50MHz | Open | Closed | Open |
| 66iMHz | Closed | Closed | Open |

| BUS SPEED CONFIGURATION | |
|--------------------------------|--------|
| Speed | JP24 |
| <= 33MHz | Open |
| > 33MHz | Closed |