


HYUNDAI ELECTRONICS, INC.

SUPER-16T

Processor	8088
Processor Speed	4.77/8MHz
Chip Set	Unidentified
Max. Onboard DRAM	640KB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, parallel port, serial port
NPU Options	8087

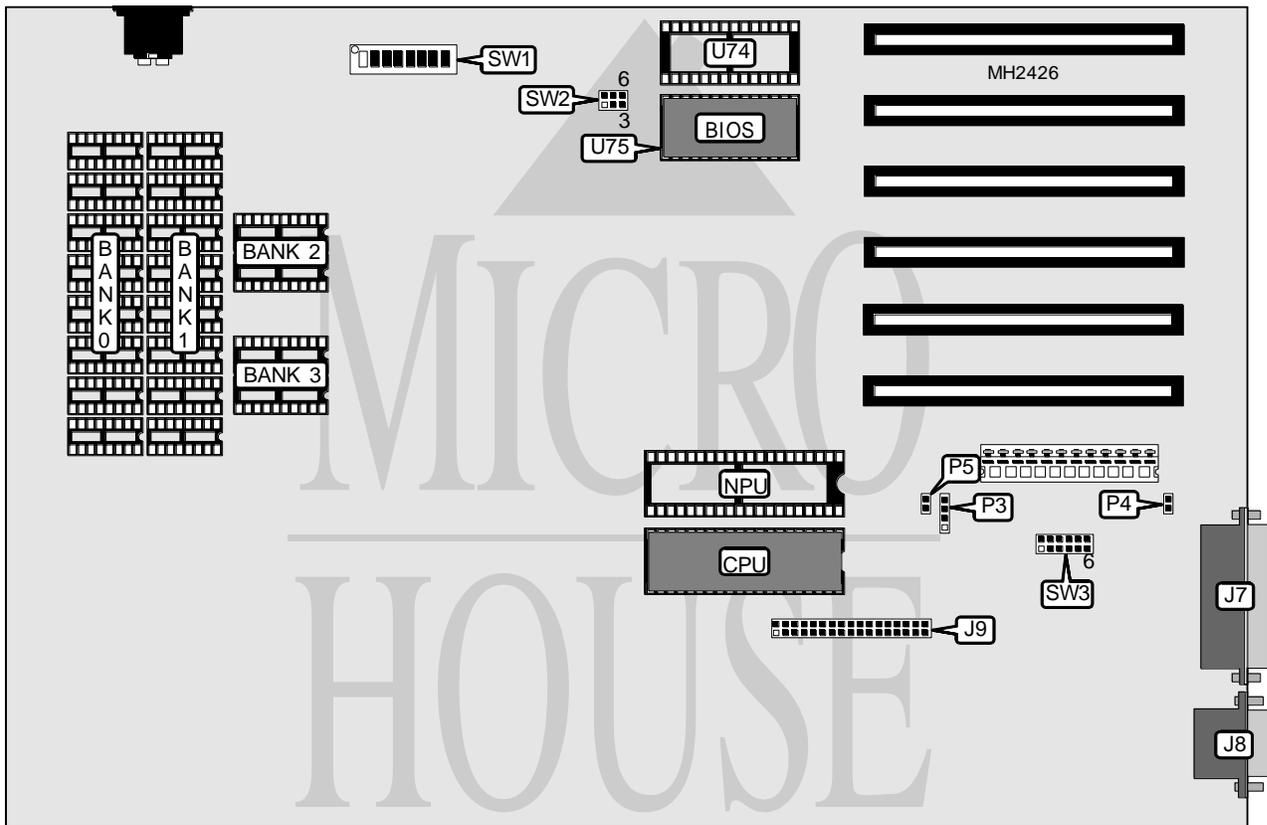

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	J7	Speaker	P3
Serial port	J8	Reset switch	P4
Floppy drive interface	J9	Turbo LED	P5

Continued on next page . . .

HYUNDAI ELECTRONICS, INC.
SUPER - 16T

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
í Factory configured - do not alter	SW1/3	Off
í Factory configured - do not alter	SW1/4	Off
í Century type select 20 century	SW1/7	Off
Century type select 21 century	SW1/7	On
í Factory configured - do not alter	SW1/8	Off
í Primary parallel port enabled (378H)	SW3	pins 2 & 8 closed
Secondary parallel port enabled (278H)	SW3	pins 1 & 7 closed
í Primary serial port 1 enabled (3F8H)	SW3	pins 5 & 11, 6 & 12 closed
Secondary serial port 2 enabled (2F8H)	SW3	pins 3 & 9, 4 & 10 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(8) 41256	NONE	NONE	NONE
640KB	(8) 41256	(8) 41256	(2) 4464	(2) 4464

CPU SPEED CONFIGURATION	
Speed	SW1/1
4.77MHz	Off
8MHz	On

VIDEO CONFIGURATION		
Type	SW1/5	SW1/6
None installed	On	On
Color	On	Off
Monochrome	Off	Off

BIOS CONFIGURATION	
Type	SW2
27128 (U74)	pins 5 & 6 closed
27128 (U75)	pins 2 & 3 closed
27256 (U74)	pins 4 & 5 closed
27256 (U75)	pins 1 & 2 closed