


BIOSTAR MICROTECH INTERNATIONAL CORPORATION MB-1560/66TIC

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	Unidentified
Max. Onboard DRAM	128MB
Cache	256KB
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (4)
NPU Options	None

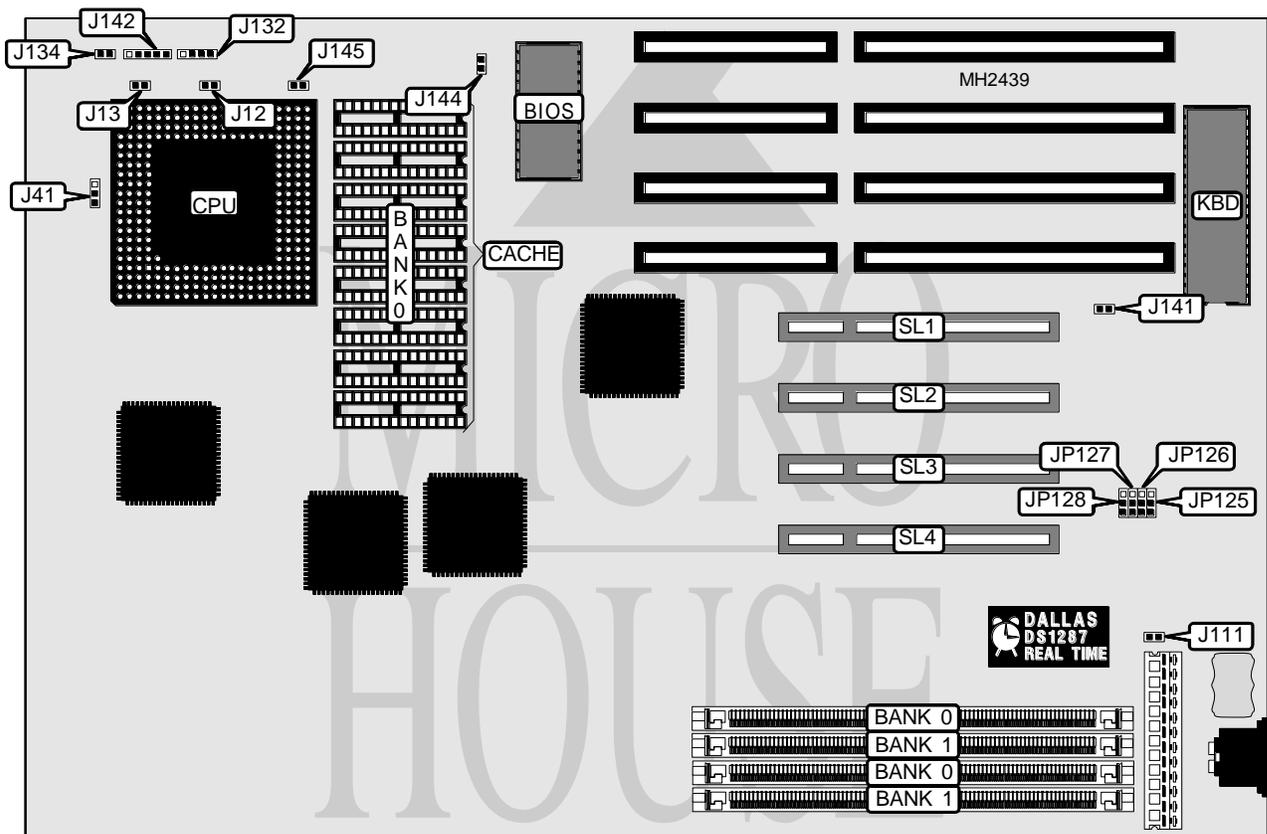

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J132	Turbo LED	J144
Reset switch	J134	Turbo switch	J145
Power LED & keylock	J142	32-bit PCI slots	SL1 - SL4

Continued on next page . . .

BIOSTAR MICROTECH INTERNATIONAL CORPORATION

MB-1560/66TIC

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Cache mode select write back	J12	Open
Cache mode select write through	J12	Closed
í Pipeline mode disabled	J13	Open
Pipeline mode enabled	J13	Closed
í Cache enabled	J41	pins 1 & 2 closed
Cache disabled	J41	pins 2 & 3 closed
í CMOS memory normal operation	J111	Open
CMOS memory clear	J111	Closed
í Monitor type select monochrome	J141	Open
Monitor type select color	J141	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
4MB	(2) 512K x 36	NONE
6MB	(2) 256K x 36	(2) 512K x 36
6MB	(2) 512K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
10MB	(2) 256K x 36	(2) 1M x 36
10MB	(2) 1M x 36	(2) 256K x 36
12MB	(2) 512K x 36	(2) 1M x 36
12MB	(2) 1M x 36	(2) 512K x 36
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
18MB	(2) 2M x 36	(2) 256K x 36
20MB	(2) 512K x 36	(2) 2M x 36
20MB	(2) 2M x 36	(2) 512K x 36
24MB	(2) 1M x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	NONE
32MB	(2) 2M x 36	(2) 2M x 36
36MB	(2) 512K x 36	(2) 4M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
72MB	(2) 1M x 36	(2) 8M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Continued on next page...

BIOSTAR MICROTECH INTERNATIONAL CORPORATION

MB-1560/66TIC

... continued from previous page

CACHE CONFIGURATION	
Size	Bank 0
256KB	(8) 32K x 8

PCI IRQ CONFIGURATION (SL1)	
IRQ	JP125
IRQ10	pins 1 & 2 closed
IRQ12	pins 2 & 3 closed

PCI IRQ CONFIGURATION (SL2)	
IRQ	JP126
IRQ11	pins 1 & 2 closed
IRQ15	pins 2 & 3 closed

PCI IRQ CONFIGURATION (SL3)	
IRQ	JP127
IRQ15	pins 1 & 2 closed
IRQ19	pins 2 & 3 closed

PCI IRQ CONFIGURATION (SL4)	
IRQ	JP128
IRQ9	pins 1 & 2 closed
IRQ14	pins 2 & 3 closed