


SIEMENS NIXDORF INFORMATIONSSYSTEME AG

S 2 6 3 6 1 - D 8 0 2 - C

| | |
|--------------------------|--|
| Processor | 80486SX/80486DX/ODP486SX/80486DX2 |
| Processor Speed | 25/33/50(internal)/66(internal)MHz |
| Chip Set | Unidentified |
| Max. Onboard DRAM | 32MB |
| Cache | 128KB |
| BIOS | Unidentified |
| Dimensions | 330mm x 218mm |
| I/O Options | Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port |
| NPU Options | None |

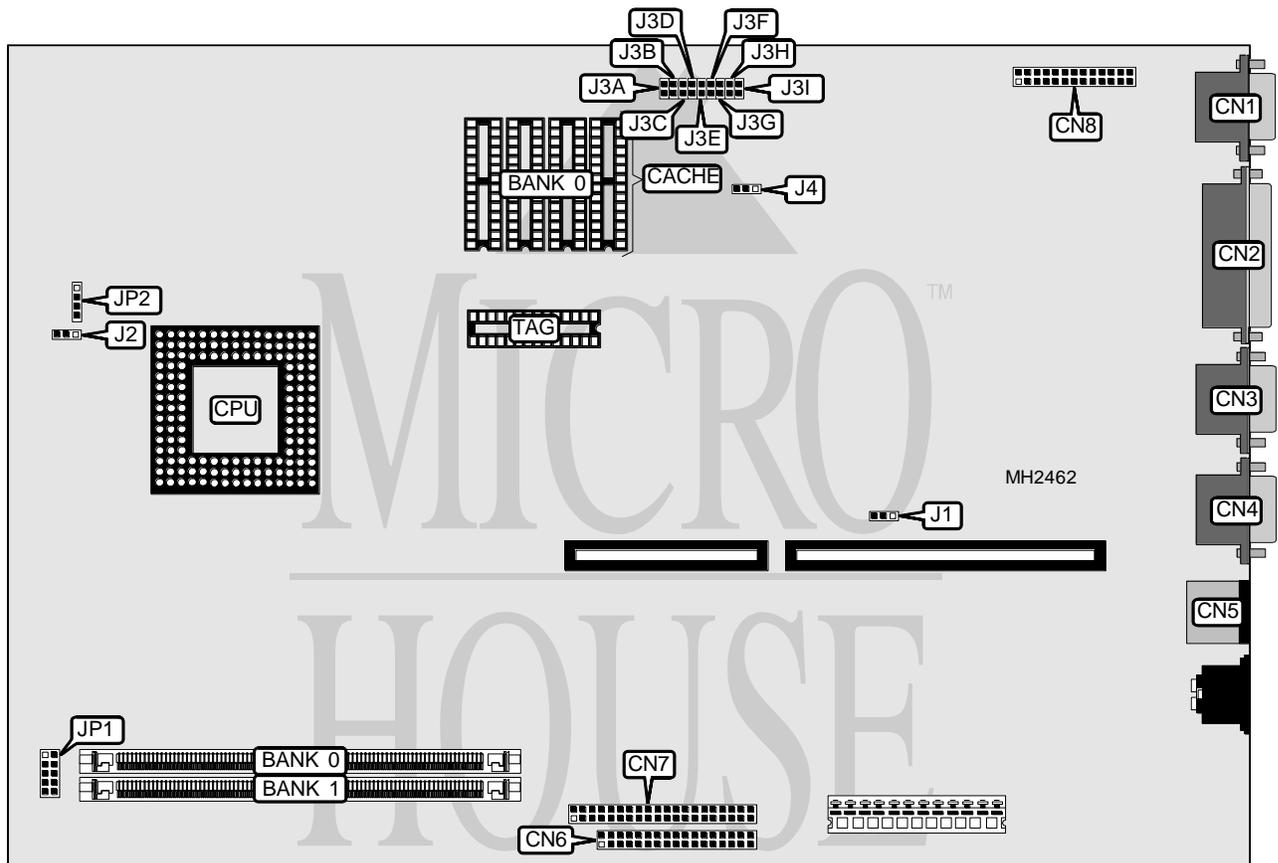

| CONNECTIONS | | | |
|-----------------|----------|------------------------|----------|
| Purpose | Location | Purpose | Location |
| VGA port | CN1 | Floppy drive interface | CN6 |
| Parallel port | CN2 | IDE interface | CN7 |
| Serial port 2 | CN3 | VGA feature connector | CN8 |
| Serial port 1 | CN4 | LED connector | JP1 |
| PS/2 mouse port | CN5 | Speaker | JP2 |

Continued on next page. . .

SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 8 0 2 - C

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|--------|-------------------|
| Function | Jumper | Position |
| í IRQ12 type select | J1 | pins 1 & 2 closed |
| IRQ12 type select | J1 | pins 2 & 3 closed |
| í CMOS memory normal operation | J3A | Open |
| CMOS memory clear | J3A | Closed |
| í Factory configured - do not alter | J3B | Closed |
| í Monitor type select color | J3D | Closed |
| Monitor type select monochrome | J3D | Open |
| í Factory configured - do not alter | J3E | Open |
| í Factory configured - do not alter | J3F | Closed |
| í Floppy drive interface enabled | J3G | Closed |
| Floppy drive interface disabled | J3G | Open |
| í IDE interface enabled | J3H | Open |
| IDE interface disabled | J3H | Closed |
| í On board VGA controller enabled | J3I | Closed |
| On board VGA controller disabled | J3I | Open |
| í VGA feature connector disabled | J4 | pins 1 & 2 closed |
| VGA feature connector enabled | J4 | pins 2 & 3 closed |

| DRAM CONFIGURATION | | |
|--------------------|-------------|-------------|
| Size | Bank 0 | Bank 1 |
| 4MB | (1) 1M x 36 | NONE |
| 8MB | (1) 1M x 36 | (1) 1M x 36 |
| 8MB | (1) 2M x 36 | NONE |
| 12MB | (1) 2M x 36 | (1) 1M x 36 |
| 16MB | (1) 2M x 36 | (1) 2M x 36 |
| 16MB | (1) 4M x 36 | NONE |
| 20MB | (1) 4M x 36 | (1) 1M x 36 |
| 24MB | (1) 4M x 36 | (1) 2M x 36 |
| 32MB | (1) 4M x 36 | (1) 4M x 36 |
| 32MB | (1) 8M x 36 | NONE |

| CACHE CONFIGURATION | | |
|---------------------|-------------|------------|
| Size | Bank 0 | TAG |
| 128KB | (4) 32K x 8 | (1) 8K x 8 |

| CPU TYPE CONFIGURATION | |
|------------------------|-------------------|
| Type | J2 |
| 80486SX | pins 1 & 2 closed |
| ODP486SX | pins 1 & 2 closed |
| 80486DX | pins 2 & 3 closed |
| 80486DX2 | pins 2 & 3 closed |

Continued on next page. . .

SIEMENS NIXDORF INFORMATIONSSYSTEME AG
S 2 6 3 6 1 - D 8 0 2 - C*... continued from previous page*

| CPU SPEED CONFIGURATION | |
|-------------------------|--------|
| Speed | J3C |
| 25MHz | Open |
| 33MHz | Closed |
| 50iMHz | Open |
| 66iMHz | Closed |