


# UNIDENTIFIED CACHE 25/33

**Processor** 80386DX  
**Processor Speed** 25/33MHz  
**Chip Set** C & T  
**Max. Onboard DRAM** 16MB (8MB on external memory card)  
**Cache** 64KB  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** 32-bit external memory card  
**NPU Options** 80387DX

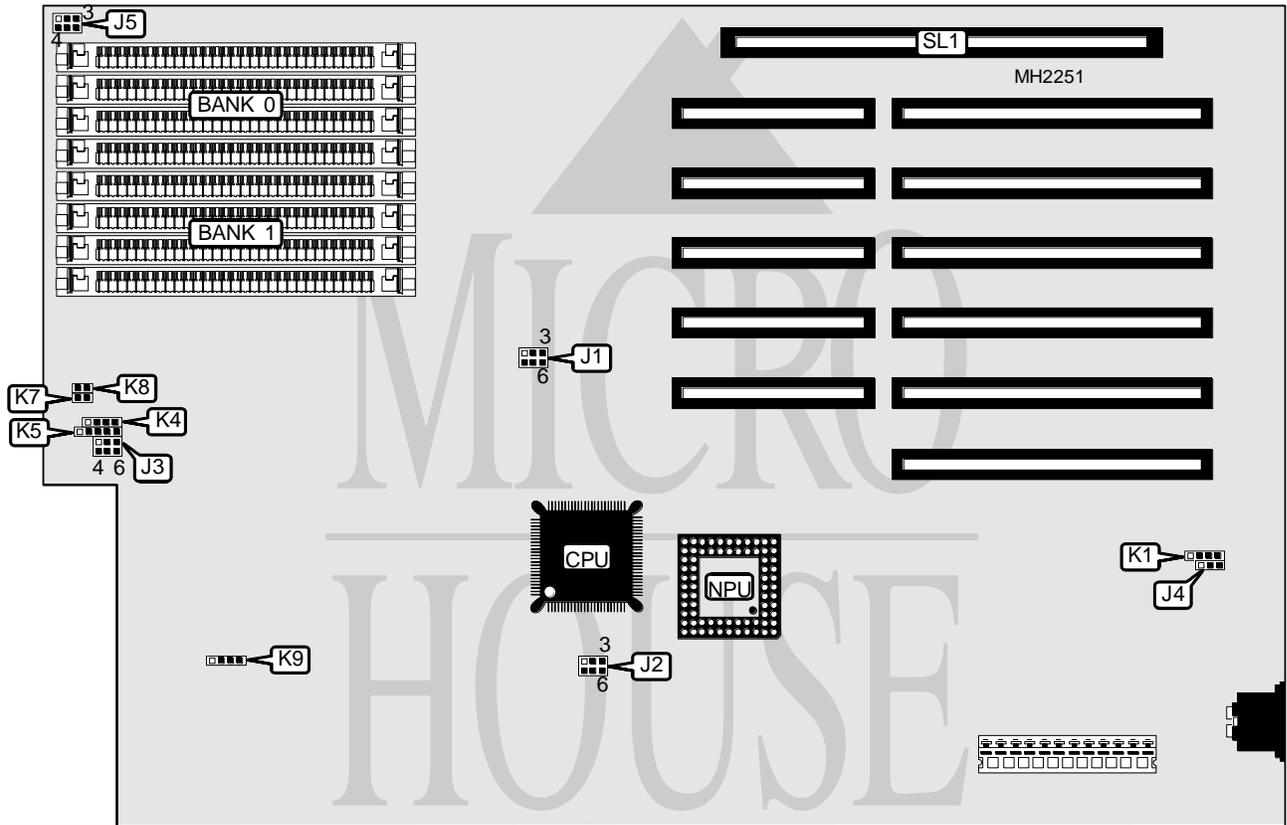

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	K1	Reset switch	K7
Speaker	K4	Turbo LED	K8
Power LED & keylock	K5	32-bit external memory card	SL1

Continued next page. . .

# UNIDENTIFIED CACHE 25/33

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU disabled	J2	pins 2 & 3, 5 & 6 closed
NPU enabled	J2	pins 1 & 2, 4 & 5 closed
í No remap hole (384KB disabled)	J3	pins 3 & 6 closed
Remap hole (384KB enabled)	J3	Open
í Monitor type select color	J4	pins 2 & 3 closed
Monitor type select monochrome	J4	pins 1 & 2 closed
í Memory expansion card not installed	J5	pins 1 & 2, 4 & 5 closed
Memory expansion card installed	J5	pins 2 & 3, 5 & 6 closed
í Factory configured - do not alter	K9	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9

DRAM JUMPER CONFIGURATION	
Size	J3
1MB	pins 1 & 4, 2 & 5 closed
2MB	pins 2 & 5 closed
4MB	pins 1 & 4, closed
8MB	Open

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
64KB	(4) 8K x 8	(4) 8K x 8

Note: Cache is factory installed and is not configurable.

BIOS CONFIGURATION	
Type	J1
27128	pins 2 & 3, 5 & 6 closed
27256	pins 1 & 2, 5 & 6 closed
27512	pins 1 & 2, 4 & 5 closed