


IPC CORPORATION

IPC SE/SEL/VALUEMAGIC/FAMILYMAGIC (MB586PCI)

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	Intel
Max. Onboard DRAM	128MB
Cache	256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (3), floppy drive interface, IDE interface, parallel port, serial ports (2)
NPU Options	None

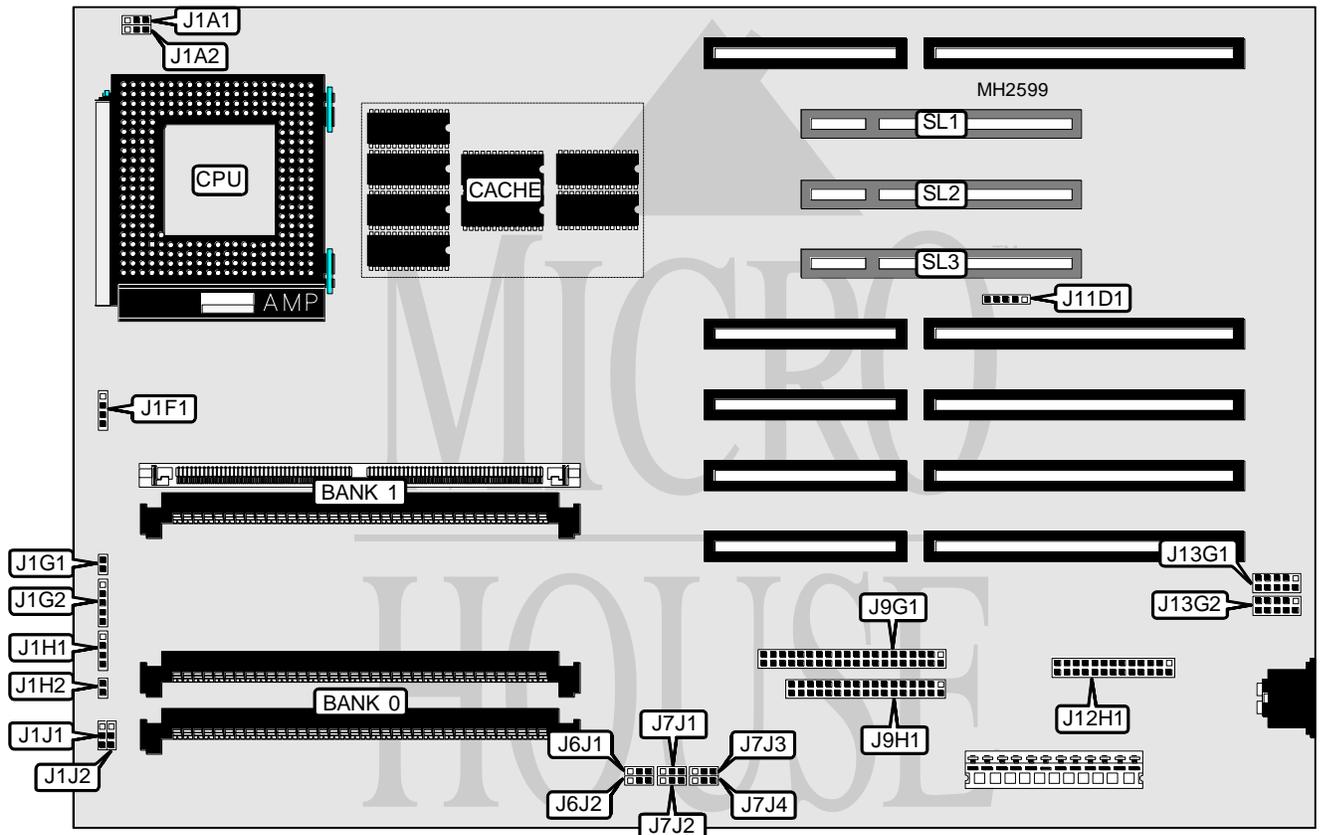

CONNECTIONS			
Purpose	Location	Purpose	Location
Chassis fan power	J1A1	Floppy drive interface	J9H1
Chassis fan power	J1A2	IDE interface	J9G1
Speaker	J1F1	Auxiliary power connector	J11D1
Reset switch	J1G1	Parallel port	J12H1
Power LED & keylock	J1G2	Serial port 1	J13G1
IDE interface LED	J1H1	Serial port 2	J13G2
Turbo LED	J1H2	32-bit PCI slots	SL1 - SL3
Turbo switch	J1J1		

Continued on next page. . .

IPC CORPORATION

IPC SE/SEL/VALUEMAGIC/FAMILYMAGIC (MB586PCI)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J6J1	pins 1 & 2 closed
CMOS memory clear	J6J1	pins 2 & 3 closed
í Flash recovery mode select normal	J6J2	pins 2 & 3 closed
Flash recovery mode select flash	J6J2	pins 1 & 2 closed
í Setup entry enabled	J7J1	pins 1 & 2 closed
Setup entry disabled	J7J1	pins 2 & 3 closed
í Flash BIOS write protect disabled	J7J2	pins 1 & 2 closed
Flash BIOS write protect enabled	J7J2	pins 2 & 3 closed
í Monitor type select color	J7J3	pins 2 & 3 closed
Monitor type select monochrome	J7J3	pins 1 & 2 closed
í Password type select do not clear	J7J4	pins 1 & 2 closed
Password type select clear	J7J4	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
4MB	(2) 512K x 36	NONE
6MB	(2) 256K x 36	(2) 512K x 36
6MB	(2) 512K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
10MB	(2) 1M x 36	(2) 256K x 36
10MB	(2) 256K x 36	(2) 1M x 36
12MB	(2) 1M x 36	(2) 512K x 36
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
18MB	(2) 2M x 36	(2) 256K x 36
18MB	(2) 256K x 36	(2) 2M x 36
20MB	(2) 2M x 36	(2) 512K x 36
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
34MB	(2) 4M x 36	(2) 256K x 36
34MB	(2) 256K x 36	(2) 4M x 36
36MB	(2) 4M x 36	(2) 512K x 36
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 4M x 36	(2) 1M x 36
40MB	(2) 1M x 36	(2) 4M x 36
48MB	(2) 4M x 36	(2) 2M x 36

Continued on next page . . .

IPC CORPORATION

IPC SE/SEL/VALUEMAGIC/FAMILYMAGIC (MB586PCI)

... continued from previous page.

DRAM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
66MB	(2) 8M x 36	(2) 256K x 36
66MB	(2) 256K x 36	(2) 8M x 36
68MB	(2) 8M x 36	(2) 512K x 36
68MB	(2) 512K x 36	(2) 8M x 36
72MB	(2) 8M x 36	(2) 1M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 2M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION

Note: This board is factory installed with 256KB cache. It is not configurable.

CPU SPEED CONFIGURATION

Speed	J1J2
60MHz	pins 2 & 3 closed
66MHz	pins 1 & 2 closed