


SHUTTLE COMPUTER INTERNATIONAL, INC. HOT - 3 2 7

Processor 80386DX
Processor Speed 33/40MHz
Chip Set UMC
Max. Onboard DRAM 64MB
Cache 128KB
BIOS AMI
Dimensions 220mm x 170mm
I/O Options None
NPU Options 80387SX

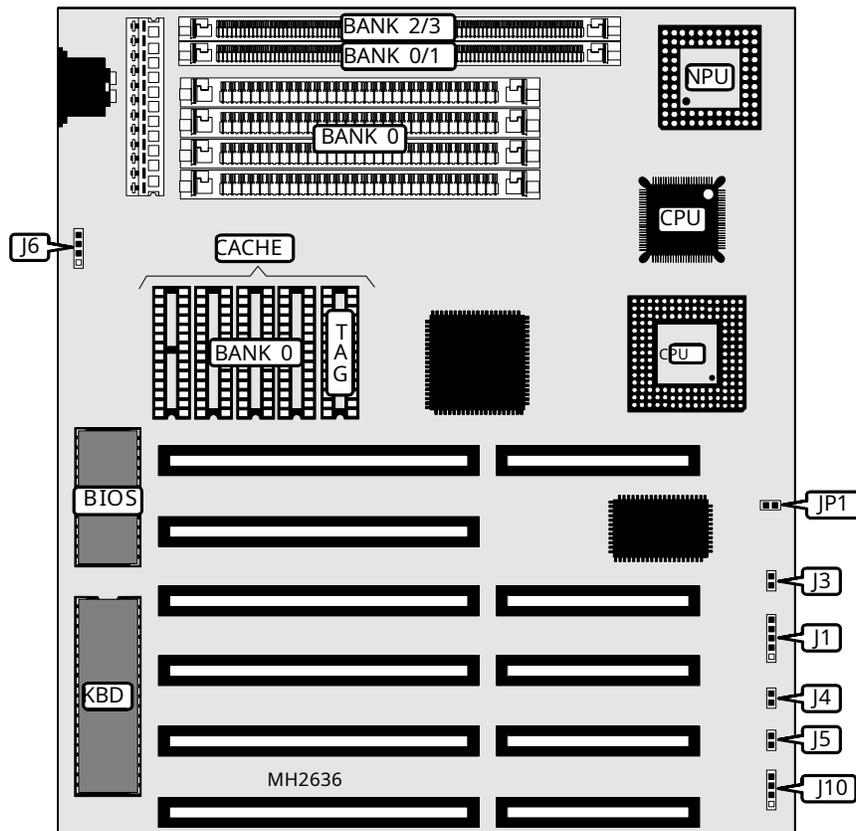

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Turbo LED	J5
Reset switch	J3	External battery	J6
Turbo switch	J4	Speaker	J10

Continued on next page. . .

SHUTTLE COMPUTER INTERNATIONAL, INC.

HOT - 327

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Turbo switch enabled	J4	Open
Turbo switch disabled	J4	Closed
í Battery select internal	J6	pins 2 & 3 closed
Battery select external	J6	Closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 0/1	Bank 2/3
1MB	(4) 256K x 9	NONE	NONE
1MB	NONE	(1) 256K x 36	NONE
2MB	NONE	(1) 256K x 36	(1) 256K x 36
2MB	NONE	(1) 512K x 36	NONE
2MB	(4) 256K x 9	(1) 256K x 36	NONE
3MB	(4) 256K x 9	(1) 256K x 36	(1) 256K x 36
4MB	(4) 1M x 9	NONE	NONE
4MB	NONE	(1) 1M x 36	NONE
4MB	NONE	(1) 512K x 36	(1) 512K x 36
4MB	(4) 256K x 9	(1) 256K x 36	(1) 512K x 36
8MB	NONE	(1) 1M x 36	(1) 1M x 36
8MB	NONE	(1) 2M x 36	NONE
8MB	(4) 1M x 9	(1) 1M x 36	NONE
12MB	(4) 1M x 9	(1) 1M x 36	(1) 1M x 36
16MB	(4) 4M x 9	NONE	NONE
16MB	NONE	(1) 4M x 36	NONE
16MB	NONE	(1) 2M x 36	(1) 2M x 36
16MB	(4) 1M x 9	(1) 1M x 36	(1) 2M x 36
32MB	(4) 4M x 9	(1) 4M x 36	NONE
32MB	NONE	(1) 4M x 36	(1) 4M x 36
32MB	NONE	(1) 8M x 36	NONE
48MB	(4) 4M x 9	(1) 4M x 36	(1) 4M x 36
64MB	(4) 16M x 9	NONE	NONE
64MB	NONE	(1) 16M x 36	NONE
64MB	NONE	(1) 8M x 36	(1) 8M x 36
64MB	(4) 4M x 9	(1) 4M x 36	(1) 8M x 36

CACHE CONFIGURATION		
Size	Bank 0	TAG
128KB	(4) 32K x 8	(1) 8K x 8

CPU SPEED CONFIGURATION	
Speed	JP1
33MHz	Closed
40MHz	Open