


REPLY CORPORATION POWERBOARD MODEL 60/65/80

Processor	80486DX2/80486DX4
Processor Speed	50(internal)/66(internal)/100(internal)MHz
Chip Set	C & T
Max. Onboard DRAM	64MB
Cache	128KB (on external cache card)
BIOS	Reply
Dimensions	330mm x 218mm
I/O Options	External cache card, floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, VGA port
NPU Options	None

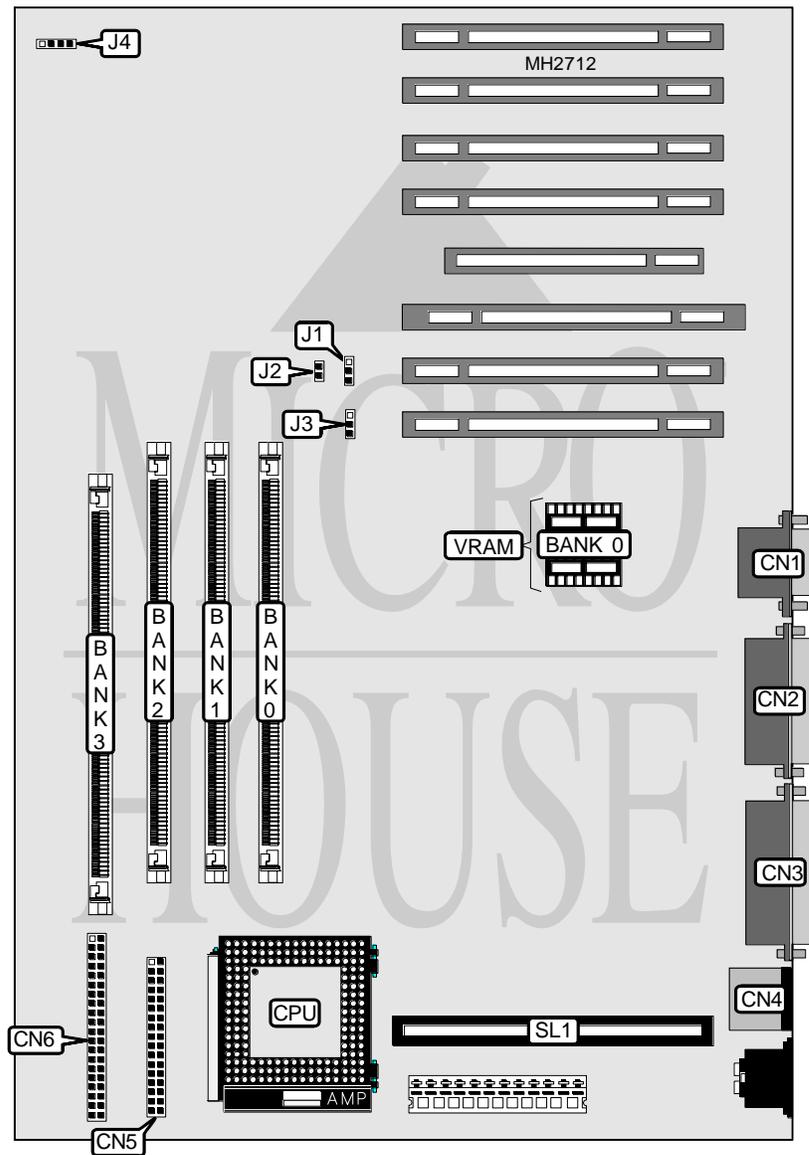

Continued on next page. . .

REPLY CORPORATION POWERBOARD MODEL 60/65/80

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Floppy drive interface	CN5
Serial port	CN2	IDE interface	CN6
Parallel port	CN3	Speaker	J4
PS/2 mouse port	CN4	External cache slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J1	pins 1 & 2 closed
CMOS memory clear	J1	pins 2 & 3 closed
í On board video enabled	J3	pins 1 & 2 closed
On board video disabled	J3	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 1M x 36	NONE	NONE	NONE
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
16MB	(1) 4M x 36	NONE	NONE	NONE
16MB	(1) 1M x 36			
20MB	(1) 1M x 36	(1) 4M x 36	NONE	NONE
20MB	(1) 1M x 36	NONE	(1) 4M x 36	NONE
24MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	NONE
24MB	(1) 1M x 36	(1) 4M x 36	(1) 1M x 36	NONE
28MB	(1) 1M x 36	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
32MB	(1) 8M x 36	NONE	NONE	NONE
36MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	NONE
40MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
52MB	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36
64MB	(1) 4M x 36			
64MB	(1) 8M x 36	(1) 8M x 36	NONE	NONE

CPU SPEED CONFIGURATION	
Speed	J2
50iMHz	Closed
66iMHz	Open
100iMHz	Open

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 1MB	(2) 1MB
2MB	(2) 1MB	NONE

Note: The location of Bank 1 is unidentified.