


# TMC RESEARCH CORPORATION

## JATO 286

<b>Processor</b>	80286
<b>Processor Speed</b>	10/12/16/20MHz
<b>Chip Set</b>	LSI
<b>Max. Onboard DRAM</b>	8MB (4MB on external memory card)
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card
<b>NPU Options</b>	80287

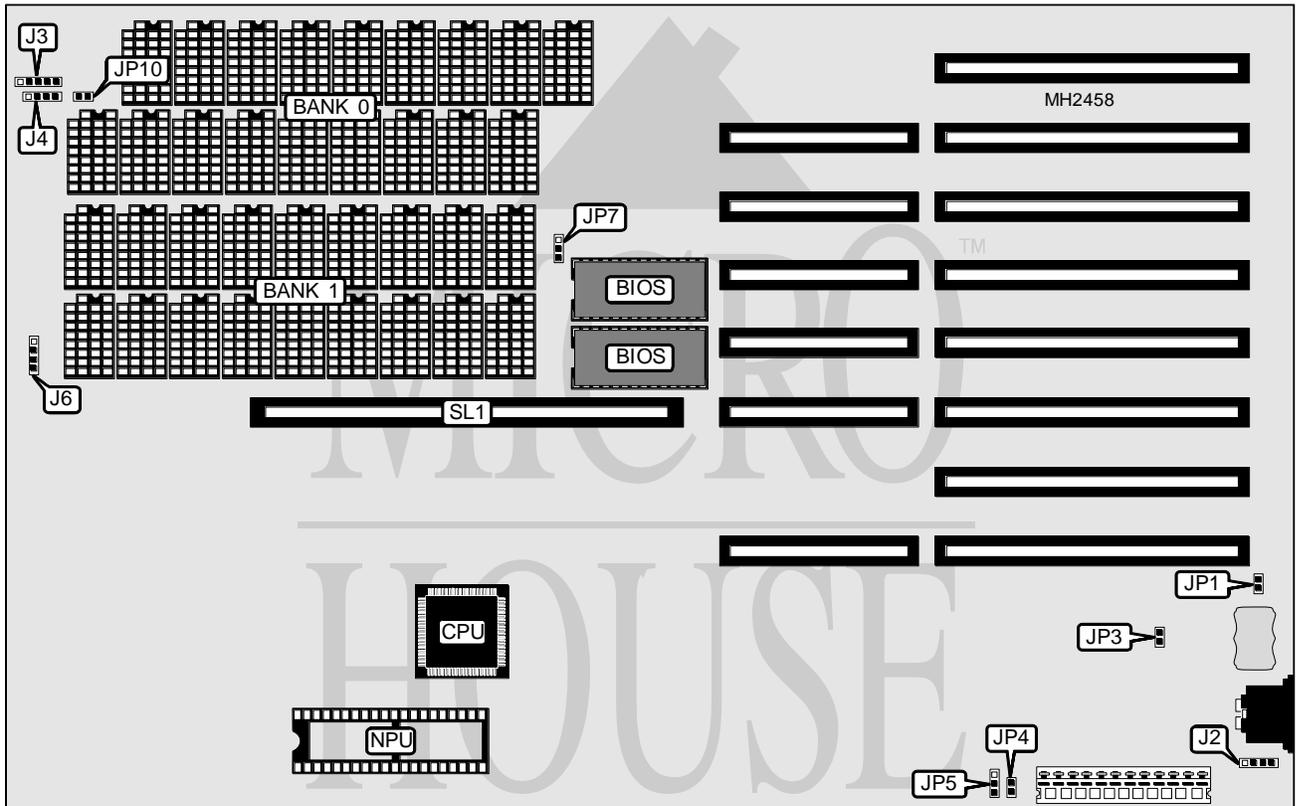

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Reset switch	JP4
Power LED & keylock	J3	Reset switch	JP10
Speaker	J4	32-bit external memory card	SL1
Turbo LED	J6		

Continued on next page. . .

TMC RESEARCH CORPORATION  
 JATO 286

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	JP1	Closed
Battery type select external	JP1	Open
í Monitor type select color	JP3	Closed
Monitor type select monochrome	JP3	Open
í Power good signal detect from board	JP5	pins 1 & 2 closed
Power good signal detect from power supply	JP5	pins 2 & 3 closed
í BIOS type select 27128	JP7	pins 1 & 2 closed
BIOS type select 27256	JP7	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
1MB	(18) 41256	(18) 41256
2MB	(18) 411000	NONE
4MB	(18) 411000	(18) 411000