


GIGA-BYTE TECHNOLOGY CO., INC.

GA - 586VL

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	ALI
Max. Onboard DRAM	160MB
Cache	256/512/1024KB
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (3), floppy drive interface, IDE interfaces (2), parallel port, serial ports (2)
NPU Options	None

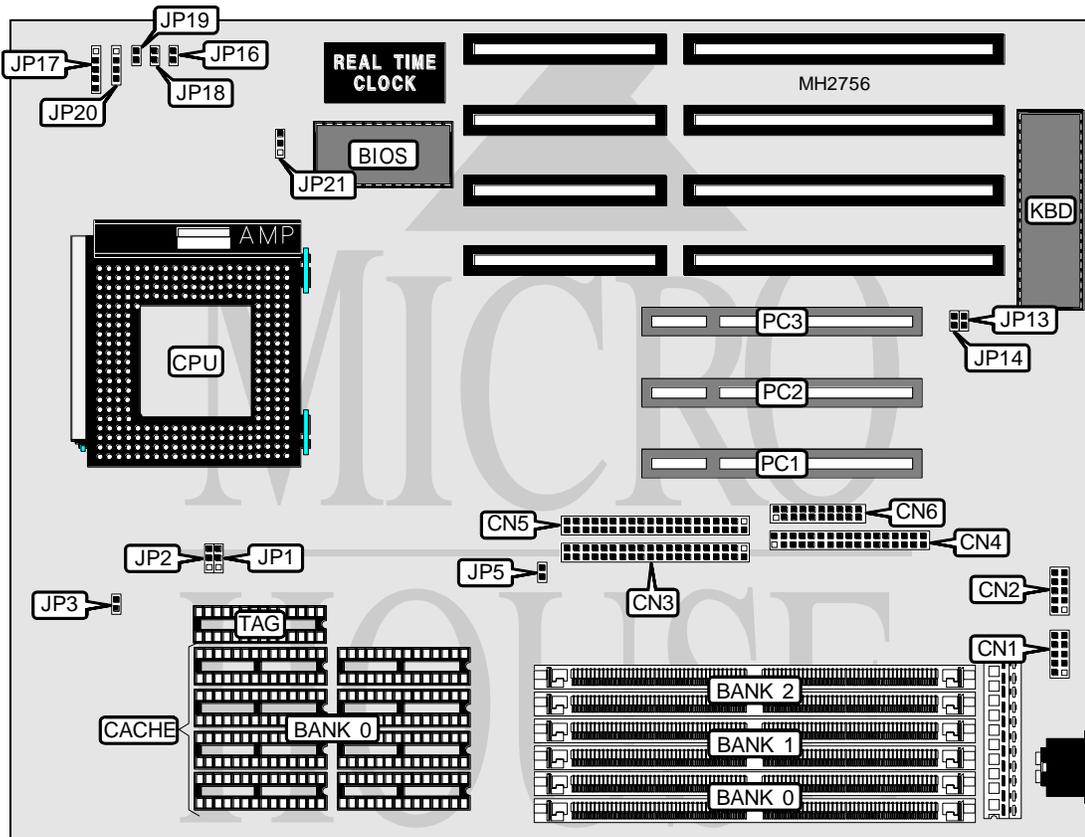

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN1	IDE interface LED	JP5
Serial port 2	CN2	Reset switch	JP16
IDE interface (primary)	CN3	Power LED & keylock	JP17
Floppy drive interface	CN4	Turbo switch	JP18
IDE interface (secondary)	CN5	Turbo LED	JP19
Parallel port	CN6	Speaker	JP20
Chassis fan power	JP3	32-bit PCI slots	PC1 - PC3

Continued on next page. . .

GIGA-BYTE TECHNOLOGY CO., INC.

GA - 586VL

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP13	N/A
Factory configured - do not alter	JP14	N/A

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
2MB	(2) 256K x 36	NONE	NONE
4MB	(2) 256K x 36	(2) 256K x 36	NONE
4MB	(2) 512K x 36	NONE	NONE
6MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
6MB	(2) 256K x 36	(2) 512K x 36	NONE
6MB	(2) 512K x 36	(2) 256K x 36	NONE
8MB	(2) 512K x 36	(2) 256K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36	NONE
8MB	(2) 1M x 36	NONE	NONE
10MB	(2) 256K x 36	(2) 512K x 36	(2) 512K x 36
10MB	(2) 256K x 36	(2) 1M x 36	NONE
10MB	(2) 1M x 36	(2) 256K x 36	NONE
12MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
12MB	(2) 512K x 36	(2) 1M x 36	NONE
12MB	(2) 1M x 36	(2) 256K x 36	(2) 256K x 36
12MB	(2) 1M x 36	(2) 512K x 36	NONE
16MB	(2) 1M x 36	(2) 512K x 36	(2) 512K x 36
16MB	(2) 1M x 36	(2) 1M x 36	NONE
16MB	(2) 2M x 36	NONE	NONE
18MB	(2) 256K x 36	(2) 1M x 36	(2) 1M x 36
18MB	(2) 256K x 36	(2) 2M x 36	NONE
18MB	(2) 2M x 36	(2) 256K x 36	NONE
20MB	(2) 512K x 36	(2) 1M x 36	(2) 1M x 36
20MB	(2) 512K x 36	(2) 2M x 36	NONE
20MB	(2) 2M x 36	(2) 256K x 36	(2) 256K x 36
20MB	(2) 2M x 36	(2) 512K x 36	NONE
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36	NONE
24MB	(2) 2M x 36	(2) 512K x 36	(2) 512K x 36
24MB	(2) 2M x 36	(2) 1M x 36	NONE
32MB	(2) 2M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	NONE
32MB	(2) 4M x 36	NONE	NONE
34MB	(2) 256K x 36	(2) 2M x 36	(2) 2M x 36
34MB	(2) 256K x 36	(2) 4M x 36	NONE
34MB	(2) 4M x 36	(2) 256K x 36	NONE
36MB	(2) 512K x 36	(2) 2M x 36	(2) 2M x 36
36MB	(2) 512K x 36	(2) 4M x 36	NONE
36MB	(2) 4M x 36	(2) 256K x 36	(2) 256K x 36

Continued on next page. . .

GIGA-BYTE TECHNOLOGY CO., INC.

GA - 586VL

... continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
36MB	(2) 4M x 36	(2) 512K x 36	NONE
40MB	(2) 1M x 36	(2) 2M x 36	(2) 2M x 36
40MB	(2) 1M x 36	(2) 4M x 36	NONE
40MB	(2) 4M x 36	(2) 512K x 36	(2) 512K x 36
40MB	(2) 4M x 36	(2) 1M x 36	NONE
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
48MB	(2) 2M x 36	(2) 4M x 36	NONE
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36	NONE
64MB	(2) 4M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	NONE
64MB	(2) 8M x 36	NONE	NONE
66MB	(2) 256K x 36	(2) 4M x 36	(2) 4M x 36
66MB	(2) 256K x 36	(2) 8M x 36	NONE
66MB	(2) 8M x 36	(2) 256K x 36	NONE
68MB	(2) 512K x 36	(2) 4M x 36	(2) 4M x 36
68MB	(2) 512K x 36	(2) 8M x 36	NONE
68MB	(2) 8M x 36	(2) 256K x 36	(2) 256K x 36
68MB	(2) 8M x 36	(2) 512K x 36	NONE
72MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
72MB	(2) 1M x 36	(2) 8M x 36	NONE
72MB	(2) 8M x 36	(2) 512K x 36	(2) 512K x 36
72MB	(2) 8M x 36	(2) 1M x 36	NONE
80MB	(2) 2M x 36	(2) 4M x 36	(2) 4M x 36
80MB	(2) 2M x 36	(2) 8M x 36	NONE
80MB	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36	NONE
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 4M x 36	(2) 8M x 36	NONE
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36	NONE
112MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	NONE
130MB	(2) 256K x 36	(2) 8M x 36	(2) 8M x 36
132MB	(2) 512K x 36	(2) 8M x 36	(2) 8M x 36
136MB	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36
144MB	(2) 2M x 36	(2) 8M x 36	(2) 8M x 36
160MB	(2) 4M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION		
Size	Bank 0	TAG
256KB	(8) 32K x 8	(1) 8K x 8 or (1) 32K x 8
512KB	(8) 64K x 8	(1) 16K x 8 or (1) 32K x 8
1MB	(8) 128K x 8	(1) 32K x 8

Continued on next page...

GIGA-BYTE TECHNOLOGY CO., INC.

GA - 586VL

... continued from previous page

CACHE JUMPER CONFIGURATION		
Size	JP1	JP2
256KB	pins 1 & 2 closed	pins 1 & 2 closed
512KB	pins 1 & 2 closed	pins 2 & 3 closed
1MB	pins 2 & 3 closed	pins 2 & 3 closed

CPU SPEED CONFIGURATION	
Speed	JP21
60MHz	pins 1 & 2 closed
66MHz	pins 2 & 3 closed