


UNIDENTIFIED DES-RIS/TB

Processor	8088 (exact location unknown)
Processor Speed	10MHz
Chip Set	Unidentified
Max. Onboard DRAM	640KB
Cache	None
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	None
NPU Options	8087 (exact location unknown)

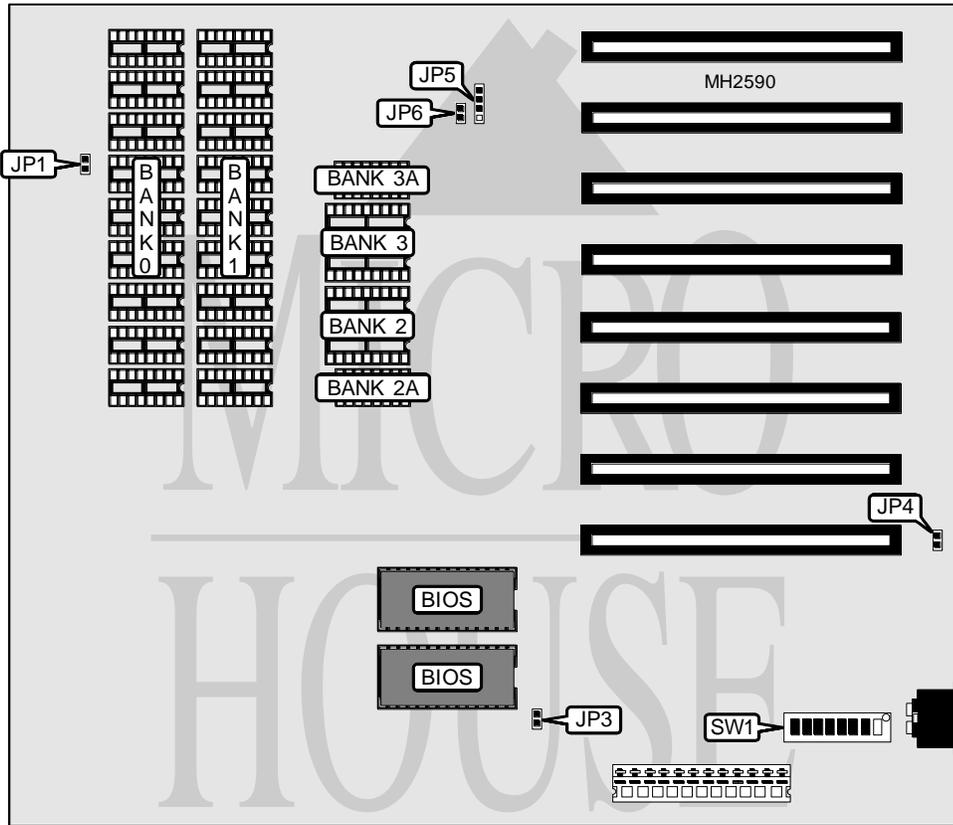

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	JP1	Power LED	JP5 pins 1 & 2
Keylock	JP3	Turbo LED	JP5 pins 3 & 4
Reset switch	JP4	Turbo switch	JP6

Continued on next page. . .

UNIDENTIFIED DES-RIS/TB

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Switch	Position
í CMOS memory normal operation	SW1/1	Off
CMOS memory clear	SW1/1	On
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
í Factory configured - do not alter	SW1/3	Off
í Factory configured - do not alter	SW1/4	Off

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 2A	Bank 3	Bank 3A
256KB	(9) 41256	NONE	NONE	NONE	NONE	NONE
512KB	(9) 41256	(9) 41256	NONE	NONE	NONE	NONE
576KB	(9) 41256	(9) 41256	(2) 4464	(1) 4164	NONE	NONE
640KB	(9) 41256	(9) 41256	(2) 4464	(1) 4164	(2) 4464	(1) 4164

VIDEO CONFIGURATION

Size	SW1/5	SW1/6
Monochrome	Off	Off
EGA	On	On
CGA (40 x 20)	Off	On
CGA (80 x 25)	On	Off

FLOPPY DRIVE CONFIGURATION

Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off