


COMPAQ COMPUTER CORPORATION PORTABLE 286

Processor	80286
Processor Speed	6/8MHz
Chip Set	FOREX
Max. Onboard DRAM	640KB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	8087/80287/80387SX/CX487SLC/80387DX/CX487DLC/3167/4167

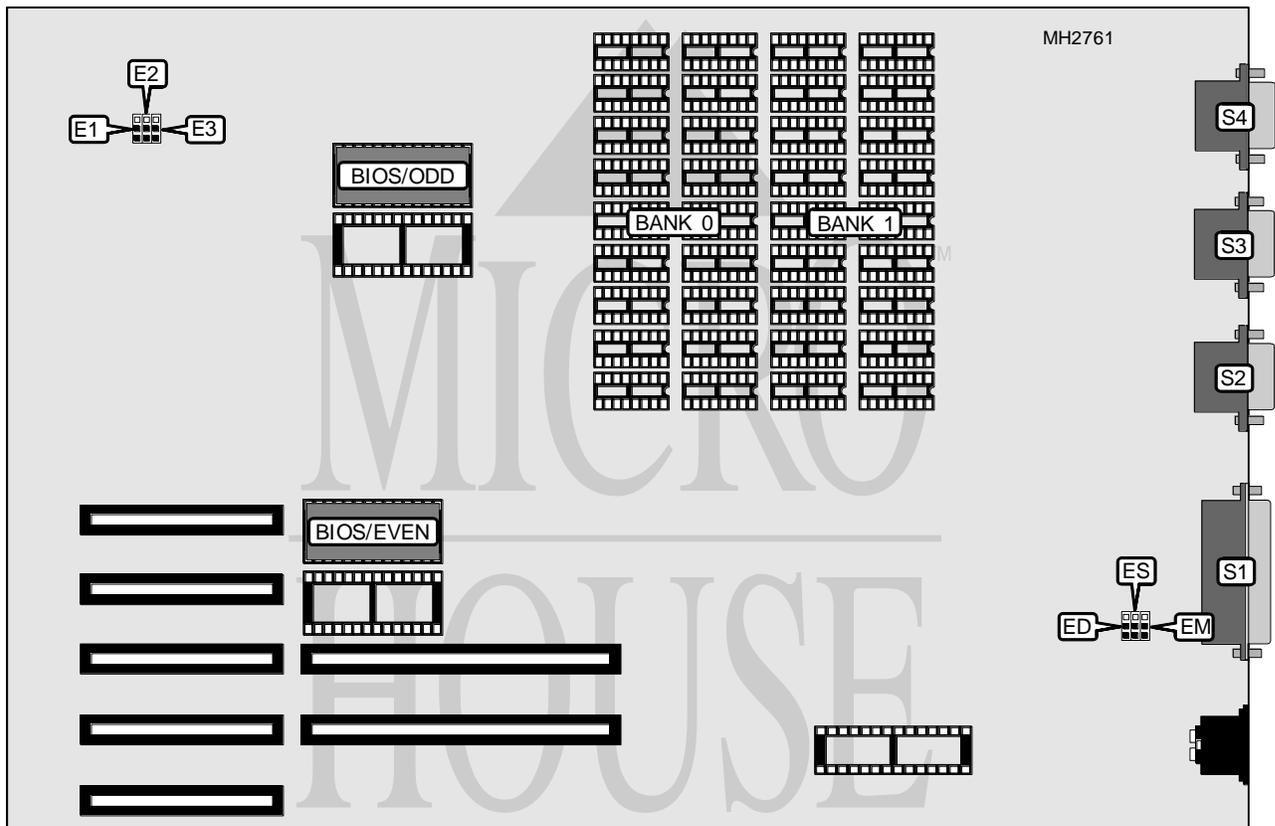

CONNECTIONS			
Purpose	Location	Purpose	Location
External power connector	S1	External battery	S3
Monitor connector	S2	Speaker	S4

Continued on next page. . .

COMPAQ COMPUTER CORPORATION

PORTABLE 286

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor select monochrome video display controller	ED	pins 1 & 2 closed
Monitor select COMPAQ dual-mode video display controller	ED	pins 2 & 3 closed
í Factory configured - do not alter	EM	N/A
í Speed select secondary, 6MHz	ES	pins 2 & 3 closed
Speed select primary, 8MHz	ES	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
128KB	128KB	NONE
256KB	128KB	(18) 4164
640KB	128KB	(18) 41256

TECHNICAL NOTE
E1, E2, E3 is unidentified by the manufacturer.