


# EDOM INTERNATIONAL CORPORATION

## 386DX (MA013)

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	128KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 170mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX/3167

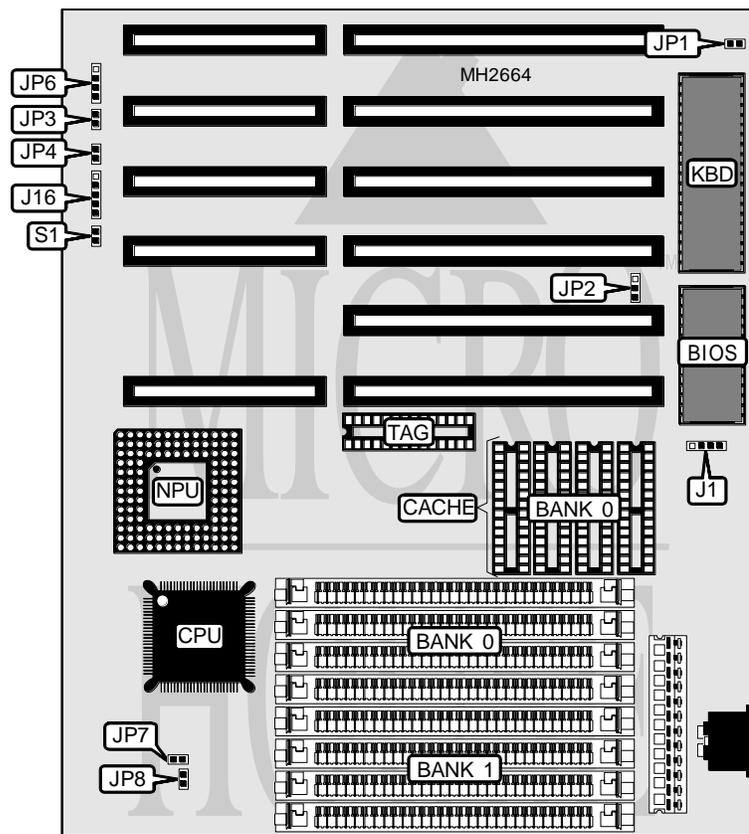

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo switch	JP4
Power LED & keylock	J16	Speaker	JP6
Turbo LED	JP3	Reset switch	S1

Continued on next page. . .

# EDOM INTERNATIONAL CORPORATION

## 386DX (MA013)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP1	Open
Monitor type select color	JP1	Closed
í CMOS memory normal operation	JP2	pins 2 & 3 closed
CMOS memory clear	JP2	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
128KB	(4) 32K x 8	(1) 8K x 8

CPU CLOCK SPEED CONFIGURATION		
Speed	JP7	JP8
50MHz	Closed	Open
66MHz	Open	Closed
80MHz	Open	Open