


# UNIDENTIFIED P O W E R S P E C

<b>Processor</b>	Pentium
<b>Processor Speed</b>	50/60/66MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	192MB
<b>Cache</b>	256/512KB
<b>BIOS</b>	Award
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit PCI slots (4)
<b>NPU Options</b>	None

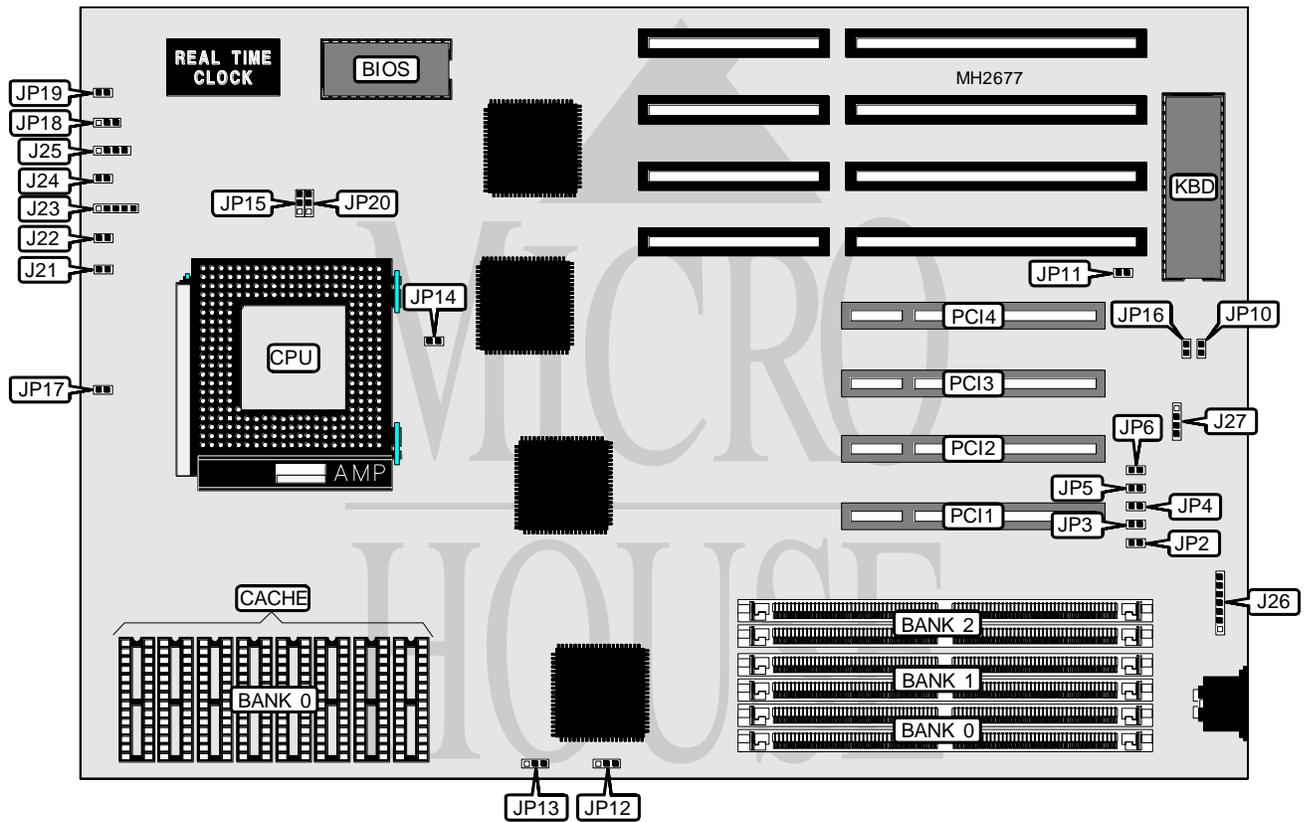

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J21	Turbo LED	J24
Turbo switch	J22	Speaker	J25
Power LED & keylock	J23	32-bit PCI slots	PCI1 - PCI4

Continued on next page. . .

# UNIDENTIFIED POWERSPEC

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J26	N/A
í Factory configured - do not alter	J27	N/A
í Factory configured - do not alter	JP2	N/A
í Factory configured - do not alter	JP3	N/A
í Factory configured - do not alter	JP4	N/A
í Factory configured - do not alter	JP5	N/A
í Factory configured - do not alter	JP6	N/A
í Factory configured - do not alter	JP10	N/A
í Factory configured - do not alter	JP11	N/A
í Pipeline mode enabled	JP14	Closed
Pipeline mode disabled	JP14	Open
í Monitor type select color	JP16	Closed
Monitor type select monochrome	JP16	Open
í CPU cache select write back	JP17	Open
CPU cache select write through	JP17	Closed
í Factory configured - do not alter	JP18	N/A
í CMOS memory normal operation	JP19	Open
CMOS memory clear	JP19	Closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
2MB	(2) 256K x 36	NONE	NONE
4MB	(2) 256K x 36	(2) 256K x 36	NONE
4MB	(2) 512K x 36	NONE	NONE
6MB	(2) 256K x 36	(2) 512K x 36	NONE
6MB	(2) 512K x 36	(2) 256K x 36	NONE
8MB	(2) 1M x 36	NONE	NONE
8MB	(2) 256K x 36	(2) 256K x 36	(2) 512K x 36
8MB	(2) 512K x 36	(2) 512K x 36	NONE
10MB	(2) 256K x 36	(2) 512K x 36	(2) 512K x 36
10MB	(2) 256K x 36	(2) 1M x 36	NONE
12MB	(2) 256K x 36	(2) 256K x 36	(2) 1M x 36
12MB	(2) 512K x 36	(2) 1M x 36	NONE
14MB	(2) 256K x 36	(2) 512K x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE	NONE
16MB	(2) 1M x 36	(2) 1M x 36	NONE
16MB	(2) 512K x 36	(2) 512K x 36	(2) 1M x 36
18MB	(2) 256K x 36	(2) 2M x 36	NONE
18MB	(2) 256K x 36	(2) 1M x 36	(2) 1M x 36
20MB	(2) 512K x 36	(2) 2M x 36	NONE
20MB	(2) 256K x 36	(2) 256K x 36	(2) 2M x 36
20MB	(2) 512K x 36	(2) 1M x 36	(2) 1M x 36
22MB	(2) 256K x 36	(2) 512K x 36	(2) 2M x 36
24MB	(2) 1M x 36	(2) 2M x 36	NONE
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36

Continued on next page. . .

# UNIDENTIFIED POWERSPEC

... continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
26MB	(2) 256K x 36	(2) 1M x 36	(2) 2M x 36
28MB	(2) 512K x 36	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE	NONE
32MB	(2) 2M x 36	(2) 2M x 36	NONE
34MB	(2) 256K x 36	(2) 4M x 36	NONE
34MB	(2) 256K x 36	(2) 2M x 36	(2) 2M x 36
36MB	(2) 512K x 36	(2) 4M x 36	NONE
36MB	(2) 512K x 36	(2) 2M x 36	(2) 2M x 36
38MB	(2) 256K x 36	(2) 512K x 36	(2) 4M x 36
40MB	(2) 1M x 36	(2) 4M x 36	NONE
40MB	(2) 1M x 36	(2) 2M x 36	(2) 2M x 36
42MB	(2) 256K x 36	(2) 1M x 36	(2) 4M x 36
44MB	(2) 512K x 36	(2) 1M x 36	(2) 4M x 36
48MB	(2) 2M x 36	(2) 4M x 36	NONE
48MB	(2) 1M x 36	(2) 1M x 36	(2) 4M x 36
50MB	(2) 256K x 36	(2) 2M x 36	(2) 4M x 36
52MB	(2) 512K x 36	(2) 2M x 36	(2) 4M x 36
56MB	(2) 1M x 36	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE	NONE
64MB	(2) 4M x 36	(2) 4M x 36	NONE
64MB	(2) 2M x 36	(2) 2M x 36	(2) 4M x 36
66MB	(2) 256K x 36	(2) 8M x 36	NONE
66MB	(2) 256K x 36	(2) 4M x 36	(2) 4M x 36
68MB	(2) 512K x 36	(2) 8M x 36	NONE
68MB	(2) 512K x 36	(2) 4M x 36	(2) 4M x 36
70MB	(2) 256K x 36	(2) 512K x 36	(2) 8M x 36
72MB	(2) 1M x 36	(2) 8M x 36	NONE
72MB	(2) 512K x 36	(2) 512K x 36	(2) 8M x 36
72MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
74MB	(2) 256K x 36	(2) 1M x 36	(2) 8M x 36
76MB	(2) 512K x 36	(2) 1M x 36	(2) 8M x 36
80MB	(2) 2M x 36	(2) 8M x 36	NONE
80MB	(2) 1M x 36	(2) 1M x 36	(2) 8M x 36
80MB	(2) 2M x 36	(2) 4M x 36	(2) 4M x 36
82MB	(2) 256K x 36	(2) 2M x 36	(2) 8M x 36
84MB	(2) 512K x 36	(2) 2M x 36	(2) 8M x 36
88MB	(2) 1M x 36	(2) 2M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 8M x 36	NONE
96MB	(2) 2M x 36	(2) 2M x 36	(2) 8M x 36
98MB	(2) 256K x 36	(2) 4M x 36	(2) 8M x 36
104MB	(2) 1M x 36	(2) 4M x 36	(2) 8M x 36
112MB	(2) 2M x 36	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36	NONE

Continued on next page. . .

# UNIDENTIFIED POWERSPEC

... continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
128MB	(2) 4M x 36	(2) 4M x 36	(2) 8M x 36
130MB	(2) 256K x 36	(2) 8M x 36	(2) 8M x 36
132MB	(2) 512K x 36	(2) 8M x 36	(2) 8M x 36
136MB	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36
144MB	(2) 2M x 36	(2) 8M x 36	(2) 8M x 36
160MB	(2) 4M x 36	(2) 8M x 36	(2) 8M x 36
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION	
Size	Bank 0
256KB	(8) 32K x 8
512KB	(8) 64K x 8

CACHE JUMPER CONFIGURATION		
Size	JP12	JP13
0KB	pins 1 & 2 closed	pins 1 & 2 closed
256KB	pins 2 & 3 closed	pins 1 & 2 closed
512KB	pins 2 & 3 closed	pins 2 & 3 closed

CPU SPEED CONFIGURATION		
Speed	JP15	JP20
50MHz	pins 1 & 2 closed	pins 1 & 2 closed
60MHz	pins 2 & 3 closed	pins 2 & 3 closed
66MHz	pins 1 & 2 closed	pins 2 & 3 closed