


WYSE TECHNOLOGY, INC.

WYSE SERIES 60001 (MODEL 665)

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	Unidentified
Max. Onboard DRAM	192MB
Cache	256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Parallel port, serial ports (2), floppy drive interface, IDE interface
NPU Options	None

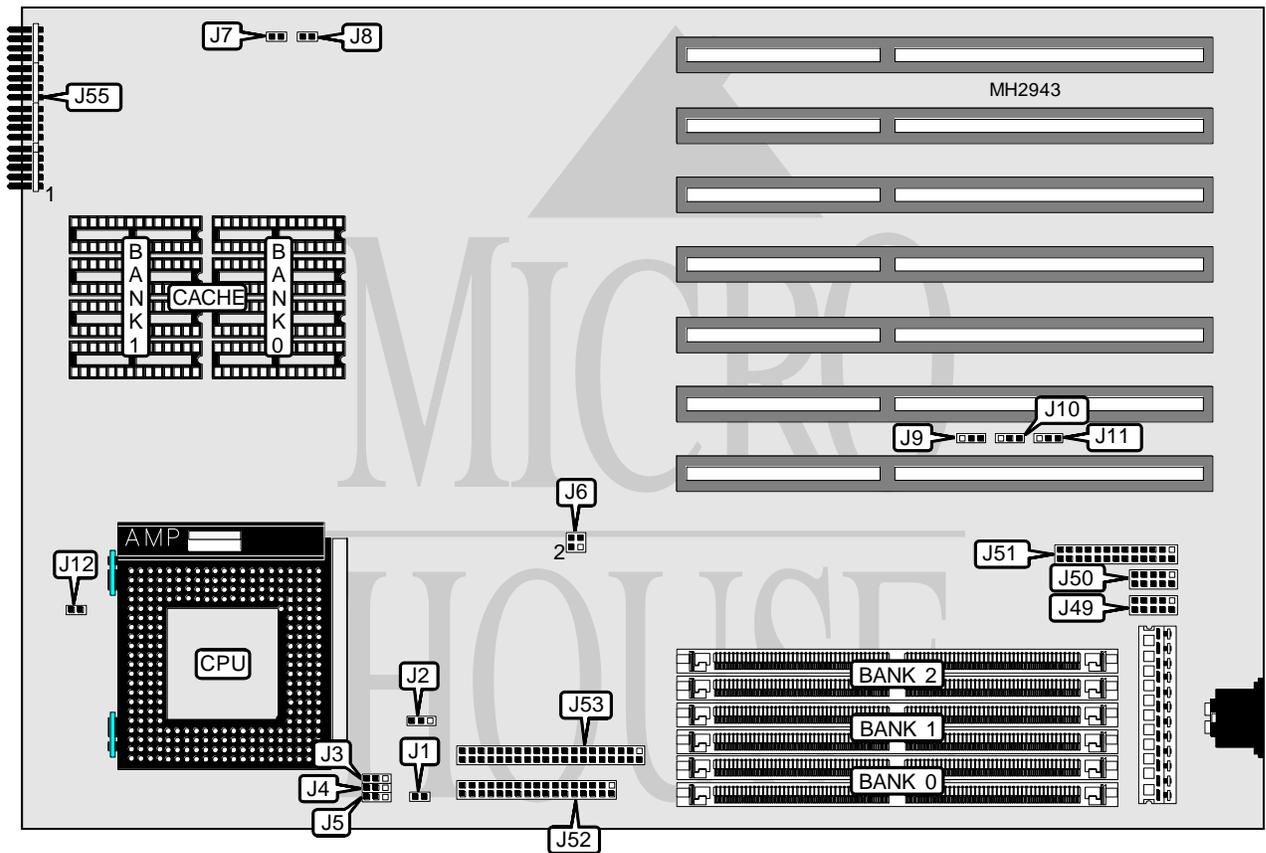

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	J49	Reset switch	J55 pins 1 & 2
Serial port 2	J50	Ice cap connector	J55 pins 3 & 4
Parallel port	J51	IDE interface LED	J55 pins 7 & 8
Floppy drive interface	J52	Speaker	J55 pins 9 - 12
IDE interface	J53		

Continued on next page. . .

WYSE TECHNOLOGY, INC.
WYSE SERIES 6000I (MODEL 665)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed source select clock generator	J2	pins 1 & 2 closed
CPU speed source select oscillator	J2	pins 2 & 3 closed
í Monitor type select color	J7	Closed
í Monitor type select monochrome	J7	Open
Factory configured - do not alter	J8	Open
í Parallel port IRQ select IRQ7	J9	pins 2 & 3 closed
Parallel port IRQ select IRQ5	J9	pins 1 & 2 closed
í Cache type select write back	J12	Open
Cache type select write through	J12	Closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
4MB	(2) 512K x 36	NONE	NONE
8MB	(2) 1M x 36	NONE	NONE
8MB	(2) 512K x 36	(2) 512K x 36	NONE
12MB	(2) 1M x 36	(2) 512K x 36	NONE
12MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
12MB	(2) 512K x 36	(2) 1M x 36	NONE
16MB	(2) 2M x 36	NONE	NONE
16MB	(2) 1M x 36	(2) 512K x 36	(2) 512K x 36
16MB	(2) 1M x 36	(2) 1M x 36	NONE
20MB	(2) 2M x 36	(2) 512K x 36	NONE
20MB	(2) 512K x 36	(2) 1M x 36	(2) 1M x 36
20MB	(2) 512K x 36	(2) 2M x 36	NONE
24MB	(2) 2M x 36	(2) 512K x 36	(2) 512K x 36
24MB	(2) 2M x 36	(2) 1M x 36	NONE
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36	NONE
32MB	(2) 4M x 36	NONE	NONE
32MB	(2) 2M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	NONE
36MB	(2) 4M x 36	(2) 512K x 36	NONE
36MB	(2) 512K x 36	(2) 2M x 36	(2) 2M x 36
36MB	(2) 512K x 36	(2) 4M x 36	NONE
40MB	(2) 4M x 36	(2) 512K x 36	(2) 512K x 36
40MB	(2) 4M x 36	(2) 1M x 36	NONE
40MB	(2) 1M x 36	(2) 2M x 36	(2) 2M x 36
40MB	(2) 1M x 36	(2) 4M x 36	NONE
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36	NONE
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
48MB	(2) 2M x 36	(2) 4M x 36	NONE
64MB	(2) 4M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	NONE

Continued on next page. . .

WYSE TECHNOLOGY, INC.

WYSE SERIES 6000I (MODEL 665)

... continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
64MB	(2) 8M x 36	NONE	NONE
68MB	(2) 8M x 36	(2) 512K x 36	NONE
68MB	(2) 512K x 36	(2) 4M x 36	(2) 4M x 36
68MB	(2) 512K x 36	(2) 8M x 36	NONE
72MB	(2) 8M x 36	(2) 512K x 36	(2) 512K x 36
72MB	(2) 8M x 36	(2) 1M x 36	NONE
72MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
72MB	(2) 1M x 36	(2) 8M x 36	NONE
80MB	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36	NONE
80MB	(2) 2M x 36	(2) 4M x 36	(2) 4M x 36
80MB	(2) 2M x 36	(2) 8M x 36	NONE
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 4M x 36	(2) 8M x 36	NONE
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36	NONE
128MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	NONE
132MB	(2) 512K x 36	(2) 8M x 36	(2) 8M x 36
136MB	(2) 1M x 36	(2) 8M x 36	(2) 8M x 36
144MB	(2) 2M x 36	(2) 8M x 36	(2) 8M x 36
160MB	(2) 4M x 36	(2) 8M x 36	(2) 8M x 36
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(4) 32K x 8	(4) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	J3	J4	J5	J6
256KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2, 3 & 4 closed

CPU SPEED CONFIGURATION	
Speed	J1
60MHz	Open
66MHz	Closed

DMA CONFIGURATION		
DMA	J10	J11
None	Open	Open
DMA 1	pins 1 & 2 closed	pins 1 & 2 closed
DMA 3	pins 2 & 3 closed	pins 2 & 3 closed