


# UNIDENTIFIED C M C - 3 8 6

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

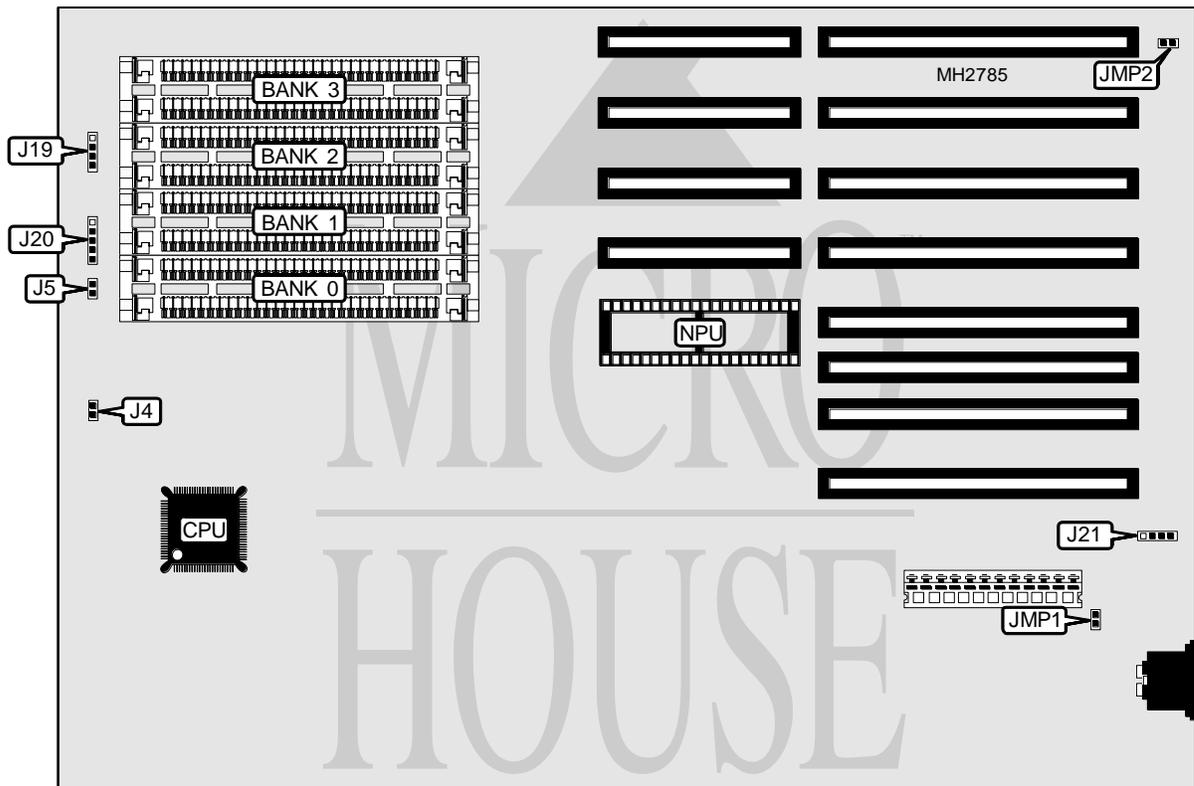

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J5	Power LED & keylock	J20
Speaker	J19	External battery	J21

Continued on next page. . .

# UNIDENTIFIED

## CMC-386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í AF32 enabled	J4	Closed
AF32 disabled	J4	Open
í Monitor type select color	JMP1	Closed
Monitor type select monochrome	JMP1	Open
í NPU disabled	JMP2	Open
NPU enabled	JMP2	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 1M x 9	(2) 256K x 9	NONE	NONE
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	NONE
3.5MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			