


WYSE TECHNOLOGY, INC. WYSE DECISION 486SI

Processor	80486SX/80486DX/80486DX2
Processor Speed	16/20/25/33/50(internal)/66(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	64MB
Cache	64/256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	PS/2 mouse port, parallel port, serial ports (2), VGA port, floppy drive interface, IDE interface
NPU Options	4167

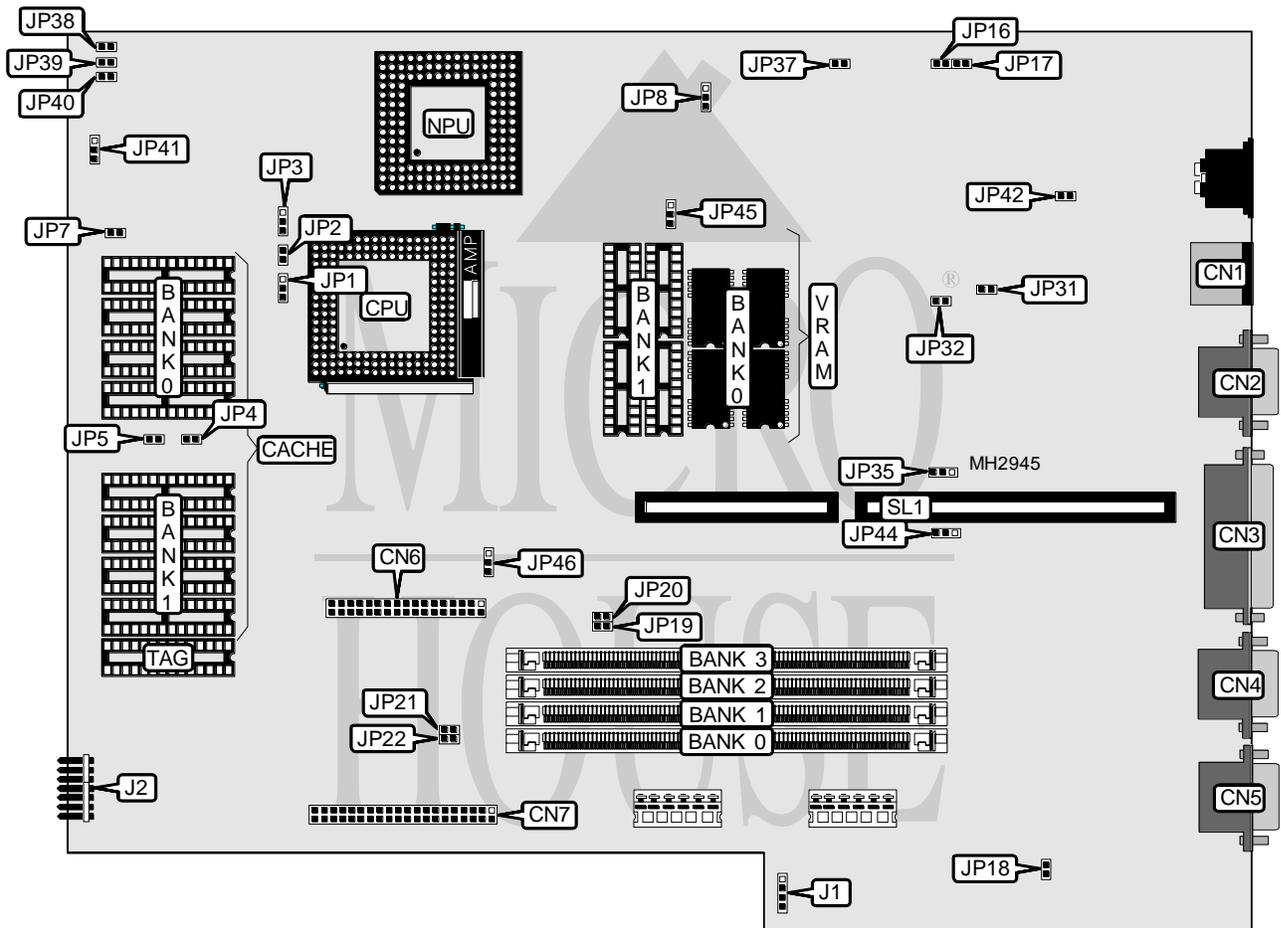

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Floppy drive interface	CN6
VGA port	CN2	IDE interface	CN7
Parallel port	CN3	External battery	J1
Serial port 2	CN4	Front panel connector	J2
Serial port 1	CN5	Riser Card	SL1

Continued on next page. . .

WYSE TECHNOLOGY, INC.
WYSE DECISION 486SI

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP16	Closed
Monitor type select monochrome	JP16	Open
í Factory configured - do not alter	JP17	Open
IDE interface enabled	JP18	Open
í IDE interface disabled	JP18	Closed
í Factory configured - do not alter	JP19	Open
í Factory configured - do not alter	JP20	Open
í Factory configured - do not alter	JP21	Open
í Factory configured - do not alter	JP22	Open
í IRQ2 enabled	JP33	Open
IRQ2 disabled	JP33	Closed
í ET4000 VGA card revision select revision G	JP37	Closed
ET4000 VGA card revision select revision F	JP37	Open
í Clock generator select normal	JP41	pins 1 & 2 closed
Clock generator select oscillator	JP41	pins 2 & 3 closed
í WY-790 enabled	JP42	Closed
WY-790 disabled	JP42	Open
í Diskette controller IRQ select IRQ7	JP44	pins 1 & 2 closed
Diskette controller IRQ select IRQ5	JP44	pins 2 & 3 closed
í Linear address enabled	JP46	pins 2 & 3 closed
Linear address disabled	JP46	pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	NONE	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE	NONE
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 1M x 36	(1) 256K x 36	NONE	NONE
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	NONE
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
9MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	NONE
10MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
13MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36
16MB	(1) 1M x 36			
16MB	(1) 4M x 36	NONE	NONE	NONE
17MB	(1) 4M x 36	(1) 256K x 36	NONE	NONE
18MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	NONE
19MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
20MB	(1) 4M x 36	(1) 1M x 36	NONE	NONE
21MB	(1) 4M x 36	(1) 1M x 36	(1) 256K x 36	NONE
22MB	(1) 4M x 36	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	NONE
25MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36

Continued on next page. . .

WYSE TECHNOLOGY, INC.

WYSE DECISION 486SI

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE
33MB	(1) 4M x 36	(1) 4M x 36	(1) 256K x 36	NONE
34MB	(1) 4M x 36	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36
36MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	NONE
37MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	(1) 256K x 36
40MB	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	NONE
49MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 256K x 36
52MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 1M x 36
64MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	JP4	JP5	JP7
None	Open	Open	Open
64KB	Open	Open	Open
256KB	Closed	Closed	Closed

CPU TYPE CONFIGURATION			
Type	JP1	JP2	JP3
80486SX	Open	Open	pins 1 & 2 closed
80486DX	pins 1 & 2 closed	Closed	pins 2 & 3 closed
SL80486DX2	pins 1 & 2 closed	Closed	pins 2 & 3 closed

CPU SPEED CONFIGURATION			
Speed	JP38	JP39	JP40
16MHz	Closed	Open	Closed
20MHz	Closed	Open	Open
25MHz	Open	Closed	Closed
33MHz	Open	Closed	Open
50iMHz	Open	Closed	Closed
66iMHz	Open	Closed	Open

VRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(4) 256K x 4	NONE
1MB	(4) 256K x 4	(4) 256K x 4

Continued on next page. . .

WYSE TECHNOLOGY, INC.
WYSE DECISION 486SI*... continued from previous page*

VGA CONFIGURATION			
Setting	JP8	JP35	JP45
Enabled	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
Disabled	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed

VGA WAIT STATE CONFIGURATION		
Wait states	JP31	JP32
0 wait states	Closed	Open
1 wait state	Open	Closed