


UNIDENTIFIED AC-1000-6A/8A

Processor 8088
Processor Speed 8MHz
Chip Set Unidentified
Max. Onboard DRAM 640KB
Cache None
BIOS Unidentified
Dimensions 254mm x 218mm
I/O Options None
NPU Options 8087

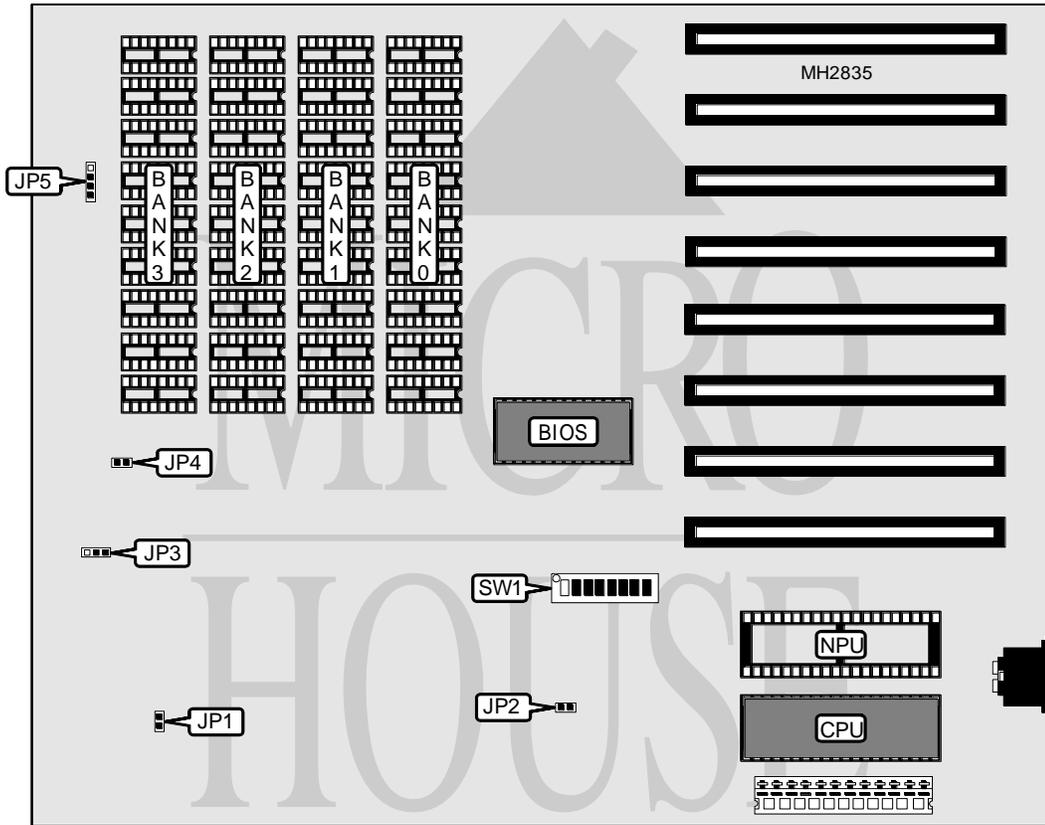

CONNECTIONS			
Purpose	Location	Purpose	Location
Keylock	JP2	Power LED	JP5 pins 1 & 2
Turbo switch	JP3	Speaker	JP5 pins 3 & 4
Turbo LED	JP4		

Continued on next page. . .

UNIDENTIFIED

AC-1000-6A/8A

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	JP1	N/A
í Turbo enabled	JP3	pins 2 & 3 closed
Turbo disabled	JP3	Open
í Factory configured - do not alter	SW1/1	Off
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(9) 41256	NONE	NONE	NONE
512KB	(9) 41256	(9) 41256	NONE	NONE
576KB	(9) 41256	(9) 41256	NONE	NONE
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164

DRAM SWITCH CONFIGURATION			
Size	SW/3		SW/4
128KB	Off		On
192KB	On		Off
256KB	Off		Off

VIDEO CONFIGURATION		
Type	SW1/5	SW1/6
None installed	On	On
40 x 20 color	Off	On
80 x 25 color	On	Off
Monochrome	Off	Off

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off