


# EVEREX SYSTEMS, INC.

## AGI 286/10 (EV-1812 REV. C)

<b>Processor</b>	80286
<b>Processor Speed</b>	10MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

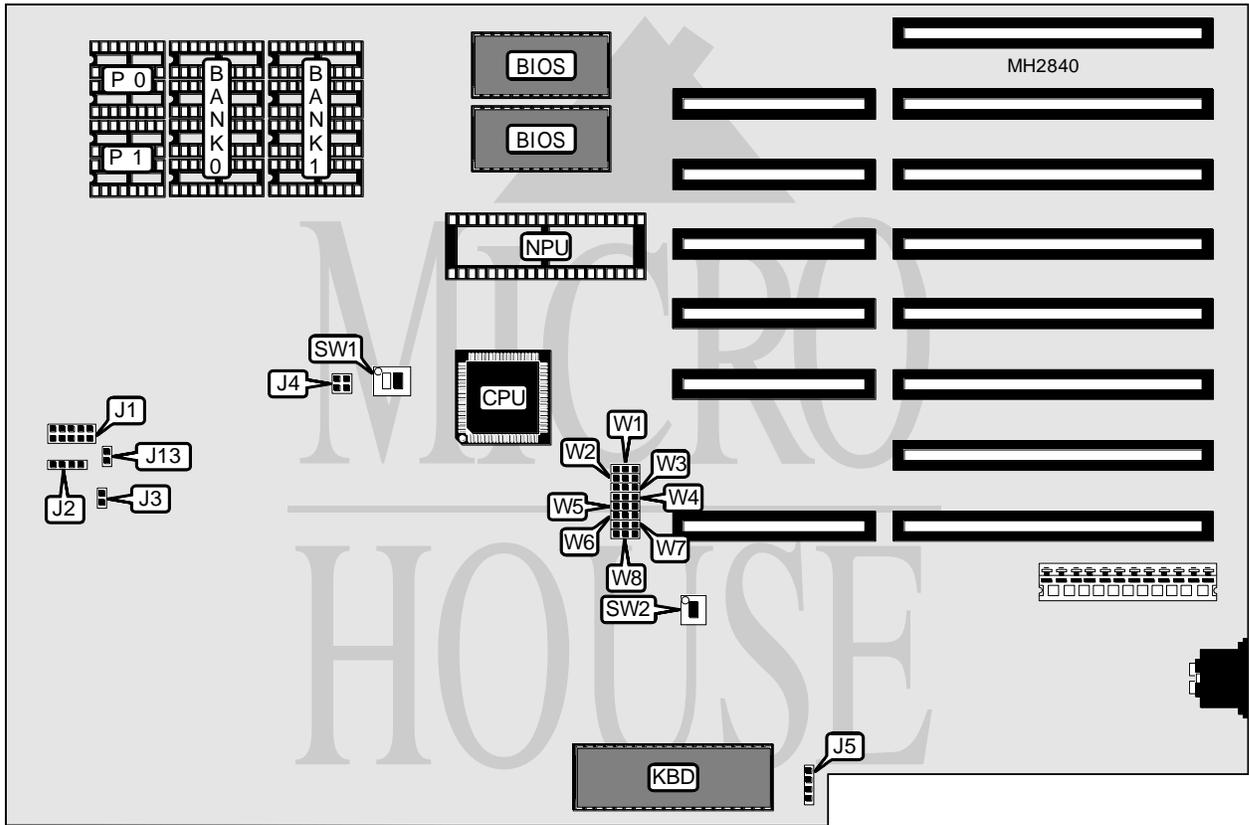

CONNECTIONS			
Purpose	Location	Purpose	Location
Front panel connector	J1	Reset switch	J3
Speaker	J2	External battery	J5

Continued on next page. . .

**EVEREX SYSTEMS, INC.**  
**AGI 286/10 (EV-1812 REV. C)**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J4	pins 3 & 4 closed
í Factory configured - do not alter	J13	pins 1 & 2 closed
í Monitor type select monochrome	SW1	On
Monitor type select color	SW2	Off
í Factory configured - do not alter	W1	pins 2 & 3 closed
í Factory configured - do not alter	W2	pins 2 & 3 closed
í Factory configured - do not alter	W3	pins 2 & 3 closed
í Factory configured - do not alter	W4	pins 2 & 3 closed
í Factory configured - do not alter	W5	pins 2 & 3 closed
í Factory configured - do not alter	W6	pins 2 & 3 closed
í Factory configured - do not alter	W7	pins 2 & 3 closed
í Factory configured - do not alter	W8	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Parity 0	Bank 1	Parity 1
512KB	(4) 44256	(2) 41256	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256

DRAM CONFIGURATION		
Size	SW1/1	SW1/2
512KB	On	Off
1MB	Off	Off