


# MAGITRONICS

## A - B 3 0 5

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20/25MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

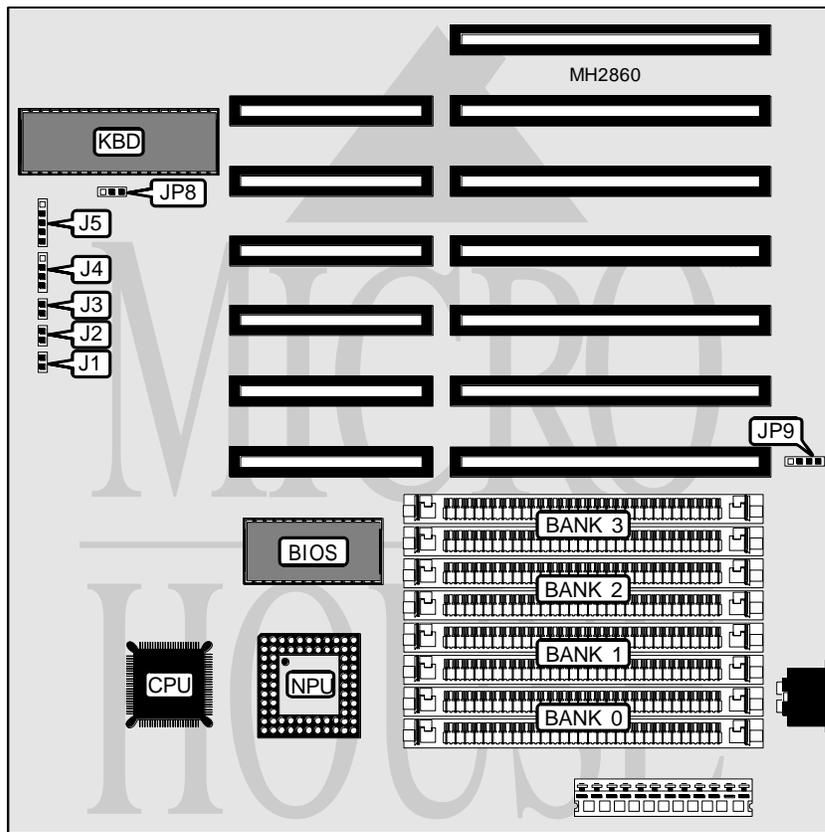

CONNECTIONS				
Purpose	Location	Purpose	Location	
Reset switch	J1	Speaker	J4	
Turbo switch	J2	Power LED & keylock	J5	
Turbo LED	J3	External battery	JP9	

Continued on next page. . .

## MAGITRONICS

## A - B 3 0 5

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP8	pins 1 & 2 closed
Monitor type select color	JP8	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9			
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(1) 1M x 9	(2) 1M x 9