


UNIDENTIFIED

J - 4 0 4

Processor	80486SX/80486DX/80486DX2
Processor Speed	25/33/40/50(internal)/50/66(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	64MB
Cache	64/128/256KB
BIOS	AMI/Award
Dimensions	250mm x 220mm
I/O Options	None
NPU Options	None

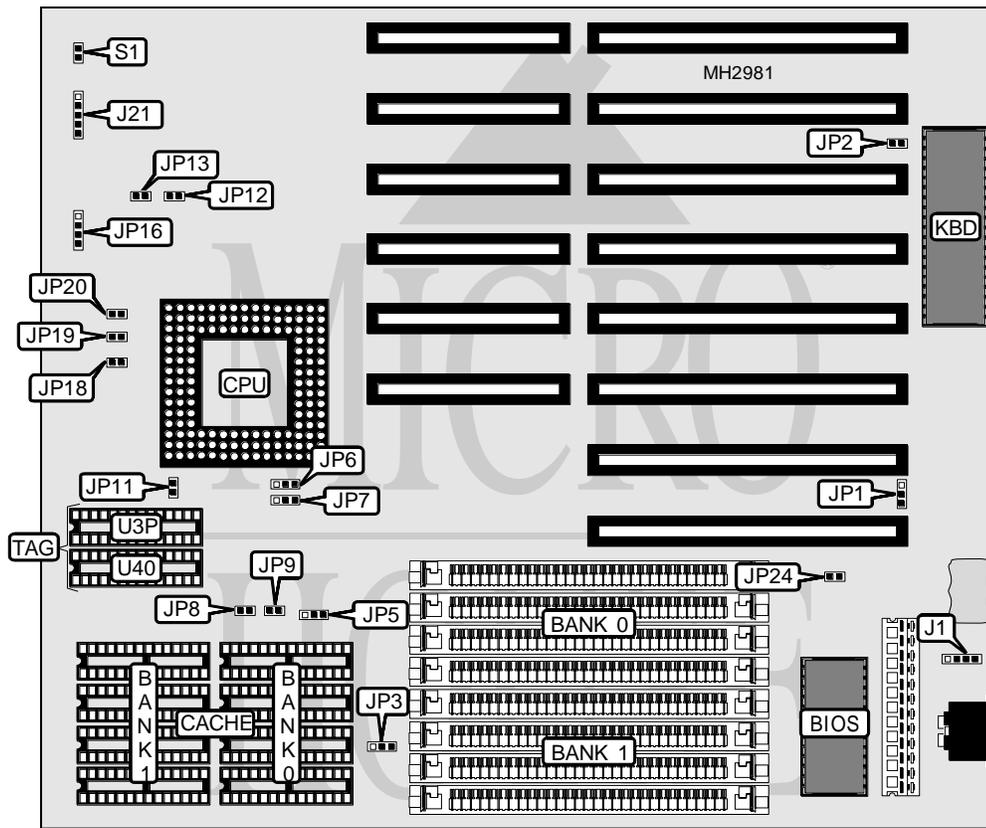

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo switch	JP13
Power LED & keylock	J21	Speaker	JP16
Turbo LED	JP12	Reset switch	S1

Continued on next page. . .

UNIDENTIFIED

J - 404

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	pins 2 & 3 closed
CMOS memory clear	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í Factory configured - do not alter	JP24	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	U3P	U40
64KB	(4) 8K x 8	(4) 8K x 8	NONE	(1) 8K x 8
128KB	(4) 32K x 8	NONE	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 8K x 8	(1) 8K x 8
256KB	(4) 64K x 8	NONE	NONE	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP3	JP5	JP8	JP9
64KB	pins 2 & 3 closed	pins 2 & 3 closed	Open	Open
128KB	pins 1 & 2 closed	pins 1 & 2 closed	Closed	Open
256KB	pins 2 & 3 closed	pins 2 & 3 closed	Closed	Closed

CPU TYPE CONFIGURATION			
Type	JP6	JP7	JP11
80486SX	pins 2 & 3 closed	pins 2 & 3 closed	Open
80486DX	pins 1 & 2 closed	pins 1 & 2 closed	Closed
80486DX2	pins 1 & 2 closed	pins 1 & 2 closed	Closed

CPU SPEED CONFIGURATION			
Speed	JP18	JP19	JP20
25MHz	Closed	Open	Closed
33MHz	Closed	Closed	Open
40MHz	Open	Open	Closed
50iMHz	Closed	Open	Closed
50MHz	Open	Closed	Open
66iMHz	Closed	Closed	Open