


ADVANCED LOGIC RESEARCH, INC.

FLYER VL

Processor	80486DX/80486DX2
Processor Speed	25/33/50(internal)/66(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	36MB
Cache	256KB (on external cache card)
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	32-bit VESA local bus slot, riser slot, cache slot, ALR proprietary slot, floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, VRAM expansion slot
NPU Options	None

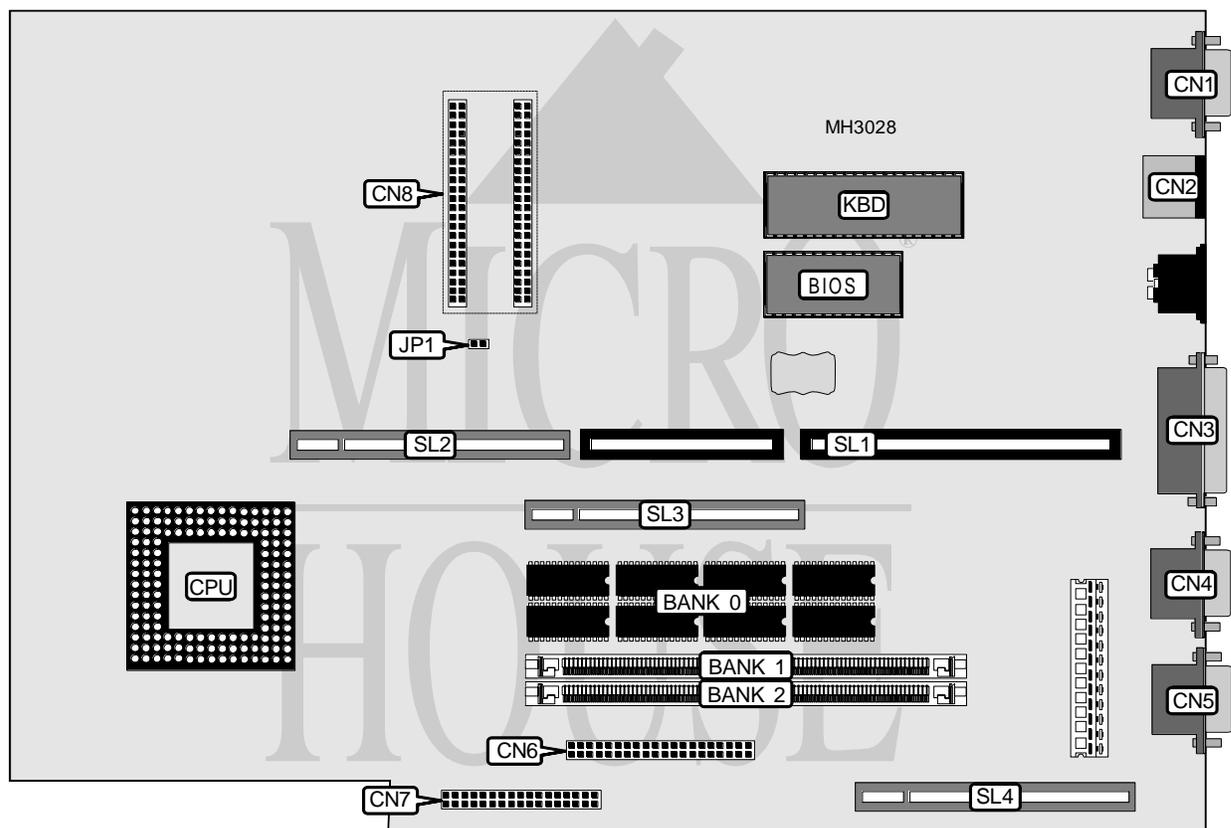

CONNECTIONS

Purpose	Location	Purpose	Location
VGA port	CN1	Floppy drive interface	CN7
PS/2 mouse port	CN2	VRAM expansion slot	CN8
Parallel port	CN3	Riser Card	SL1
Serial port 1/2	CN4	32-bit VESA local bus slot	SL2
Serial port 1/2	CN5	Cache slot	SL3
IDE interface	CN6	ALR proprietary slot	SL4

Note: The location of pin 1 is unidentified.

Continued on next page...

ADVANCED LOGIC RESEARCH, INC.

FLYER VL

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Forced VGA enabled	JP1	Closed
Forced VGA disabled	JP1	Open

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
4MB	4MB	NONE	NONE
8MB	4MB	(1) 1M x 36	NONE
12MB	4MB	(1) 1M x 36	(1) 1M x 36
20MB	4MB	(1) 4M x 36	NONE
24MB	4MB	(1) 1M x 36	(1) 4M x 36
36MB	4MB	(1) 4M x 36	(1) 4M x 36

Note: Bank 0 is factory installed and is not configurable.

CACHE CONFIGURATION	
Size	SL3
256KB	Installed