


# ICL VALUEPLUS MD/P60 SERIES

<b>Processor</b>	Pentium
<b>Processor Speed</b>	60MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	96MB
<b>Cache</b>	256/512KB
<b>BIOS</b>	Acer
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	PS/2 mouse port, parallel port, serial ports (2), 32-bit PCI slots (3), floppy drive interface, IDE interface
<b>NPU Options</b>	None

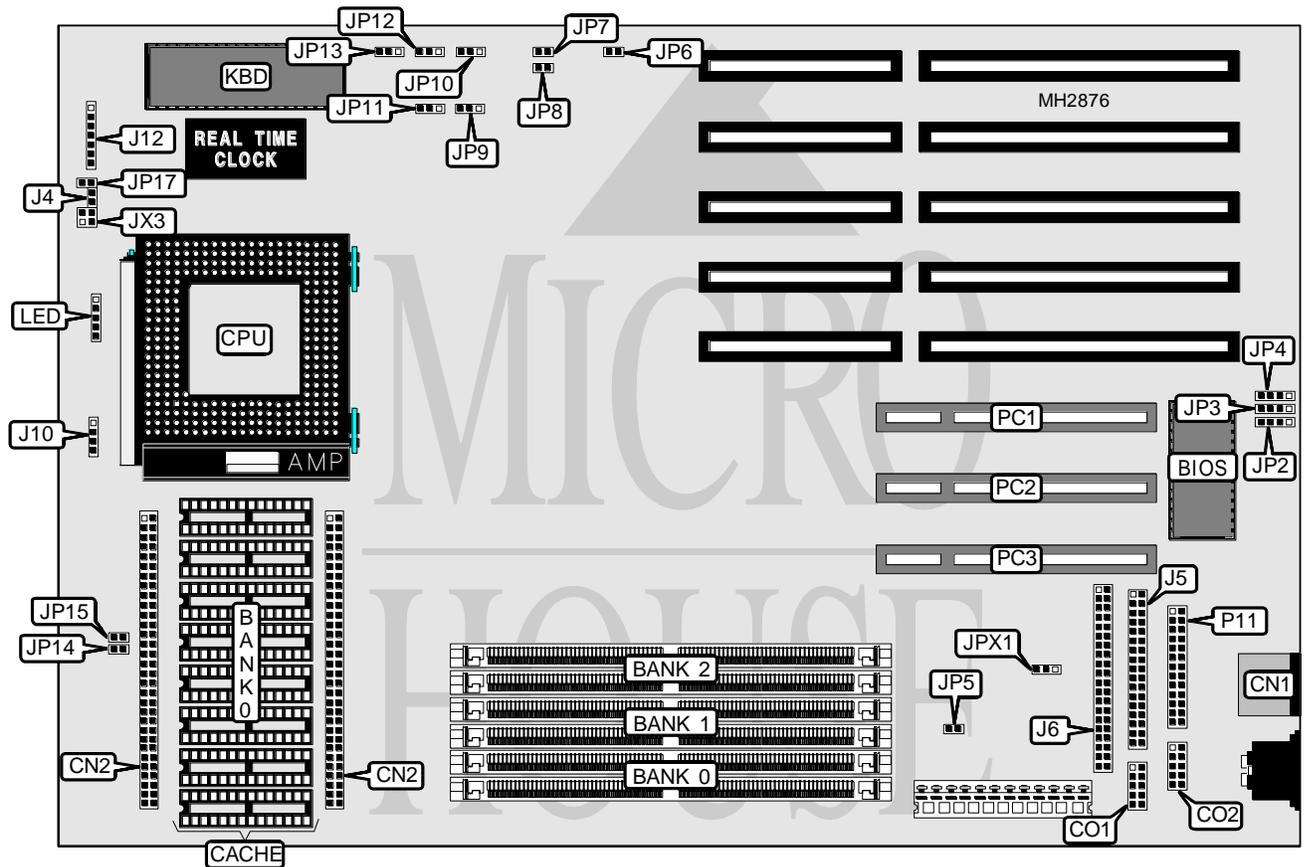

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Auxiliary keyboard connector	J12
Serial port 1	CO1	+5v ground	JP9
Serial port 2	CO2	IDE interface LED	JX3
IDE interface LED	J4	Power LED & keylock	LED
Floppy drive interface	J5	Parallel port	P11
IDE interface	J6	32-bit PCI slots	PC1 - PC3
Chassis fan power	J10		

Continued on next page. . .

# ICL VALUEPLUS MD/P60 SERIES

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í On board I/O enabled	JP5	Closed
On board I/O disabled	JP5	Open
í Parallel port bidirectional	JP6	Closed
Parallel port unidirectional	JP6	Open
í Password disabled	JP11	pins 2 & 3 closed
Password enabled	JP11	pins 1 & 2 closed
í Cache type select standard cache	JP13	pins 1 & 2 closed
Cache type select burst cache	JP13	pins 2 & 3 closed
í Keylock disabled	JP17	Closed
Keylock enabled	JP17	Open
í Ground pin 28 hard disk drive	JPX1	pins 2 & 3 closed
HALE pin 28	JPX1	pins 1 & 2 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	NONE	NONE
16MB	(2) 1M x 36	(2) 1M x 36	NONE
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	NONE	NONE
40MB	(2) 1M x 36	(2) 4M x 36	NONE
40MB	(2) 4M x 36	(2) 1M x 36	NONE
48MB	(2) 1M x 36	(2) 1M x 36	(2) 4M x 36
48MB	(2) 1M x 36	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
64MB	(2) 4M x 36	(2) 4M x 36	NONE
72MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
72MB	(2) 4M x 36	(2) 1M x 36	(2) 4M x 36
72MB	(2) 4M x 36	(2) 4M x 36	(2) 1M x 36
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36

CACHE CONFIGURATION		
Size	Bank 0	CN2
256KB	(8) 32K x 8	NONE
512KB	(8) 32K x 8	Card installed

Note: To use 512KB cache, a cache card must be installed at CN2.

CACHE JUMPER CONFIGURATION		
Size	JP10	JP12
None	pins 1 & 2 closed	pins 1 & 2 closed
256KB	pins 2 & 3 closed	pins 1 & 2 closed
512KB	pins 2 & 3 closed	pins 2 & 3 closed

Continued on next page. . .

# ICL

## VALUEPLUS MD/P60 SERIES

... continued from previous page

CACHE OE# SIGNAL CONFIGURATION		
Size	JP14	JP15
256KB cache enabled	Closed	Closed
256KB cache disabled	Open	Open

L2 PARITY CHECK CONFIGURATION		
Setting	JP7	JP8
Disabled	Closed	Closed
Enabled	Open	Open

PCI IRQ CONFIGURATION (INT B)	
IRQ	JP2
Disabled	pins 2 & 3 closed
IRQ14	pins 3 & 4 closed
IRQ15	pins 1 & 2 closed

PCI IRQ CONFIGURATION (INT C)	
IRQ	JP3
Disabled	pins 2 & 3 closed
IRQ11	pins 1 & 2 closed
IRQ15	pins 3 & 4 closed

PCI IRQ CONFIGURATION (INT D)	
IRQ	JP4
Disabled	pins 2 & 3 closed
IRQ10	pins 1 & 2 closed
IRQ15	pins 3 & 4 closed