


DTK COMPUTER, INC.

P P M - 3 3 3 3 P

| | |
|--------------------------|--------------------------|
| Processor | AM386SX/80386SX/CX486SLC |
| Processor Speed | 16/33/40MHz |
| Chip Set | OPTI |
| Max. Onboard DRAM | 16MB |
| Cache | 16/32/64/128KB |
| BIOS | Unidentified |
| Dimensions | 220mm x 220mm |
| I/O Options | None |
| NPU Options | 80387SX |

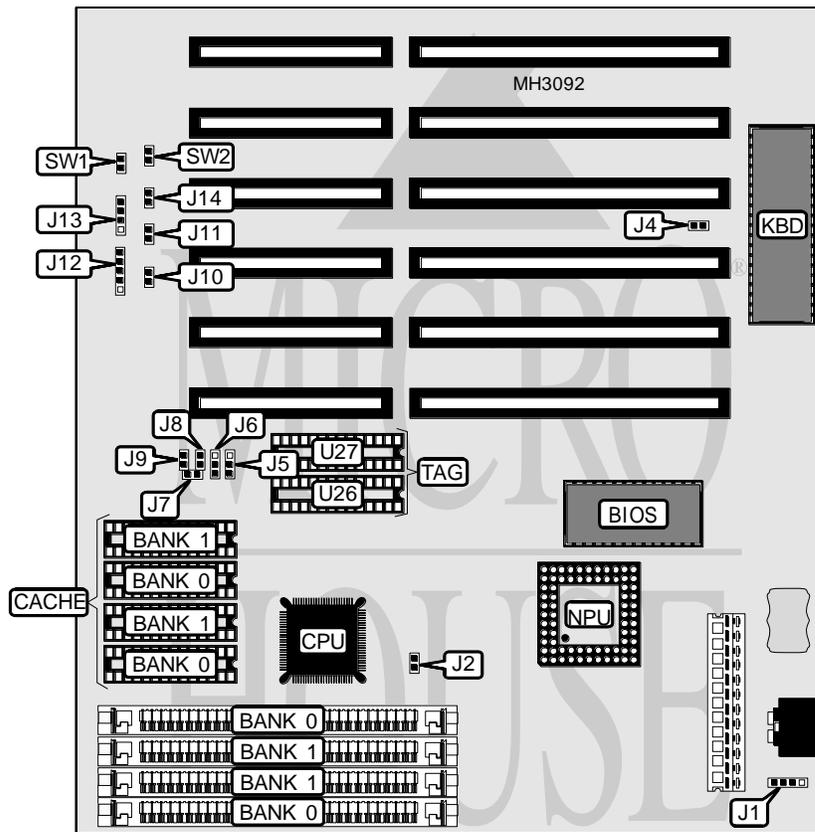

| CONNECTIONS | | | |
|---------------------|----------|--------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | J1 | Turbo LED | J14 |
| Power LED & keylock | J12 | Reset switch | SW1 |
| Speaker | J13 | Turbo switch | SW2 |

Continued on next page. . .

DTK COMPUTER, INC.

PPM - 3333P

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--------------------------------|--------|-------------------|
| Function | Jumper | Position |
| Battery type select internal | J1 | pins 2 & 3 closed |
| Battery type select external | J1 | Closed |
| Monitor type select color | J4 | Closed |
| Monitor type select monochrome | J4 | Open |

| DRAM CONFIGURATION | | |
|--------------------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (2) 256K x 9 | (2) 256K x 9 |
| 2MB | (2) 1M x 9 | NONE |
| 4MB | (2) 1M x 9 | (2) 1M x 9 |
| 8MB | (2) 4M x 9 | NONE |
| 10MB | (2) 1M x 9 | (2) 4M x 9 |
| 16MB | (2) 4M x 9 | (2) 4M x 9 |

| CACHE CONFIGURATION | | | | |
|---------------------|-------------|-------------|------------|------------|
| Size | Bank 0 | Bank 1 | TAG (U26) | TAG (U27) |
| 16KB | (2) 8K x 8 | NONE | (1) 8K x 8 | NONE |
| 32KB | (2) 8K x 8 | (2) 8K x 8 | (1) 8K x 8 | NONE |
| 64KB | (2) 32K x 8 | NONE | (1) 8K x 8 | NONE |
| 128KB | (2) 32K x 8 | (2) 32K x 8 | (1) 8K x 8 | (1) 8K x 8 |

| CACHE JUMPER CONFIGURATION | | | | | | |
|----------------------------|-------|-------|--------|--------|--------|--------|
| Size | J5 | J6 | J7 | J8 | J9 | J10 |
| 16KB | 2 & 3 | 2 & 3 | Open | Open | Open | Open |
| 32KB | 2 & 3 | 2 & 3 | Open | Open | Closed | Open |
| 64KB | 1 & 2 | 2 & 3 | Open | Closed | Closed | Open |
| 128KB | 1 & 2 | 1 & 2 | Closed | Closed | Closed | Closed |

Note: Pins designated should be in the closed position.

| CPU TYPE CONFIGURATION | | |
|------------------------|--------|--------|
| Type | J2 | J11 |
| AM386SX | Open | Open |
| 80386SX | Open | Open |
| CX486SLC | Closed | Closed |