


# UNIDENTIFIED C - 3 2 0 0

<b>Processor</b>	80386DX
<b>Processor Speed</b>	20MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	16MB (8MB on external memory card)
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	External memory card
<b>NPU Options</b>	80387DX

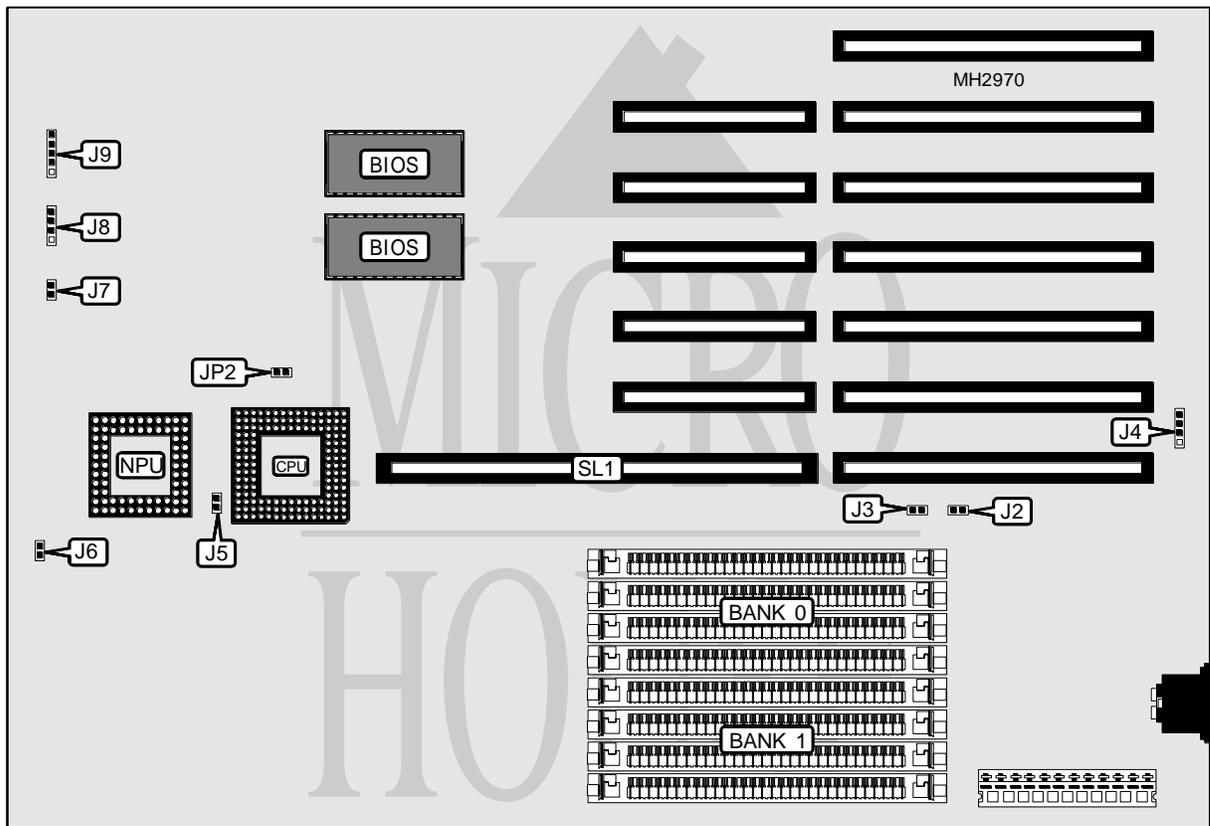

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Speaker	J8
Turbo LED	J6	Power LED & keylock	J9
Reset switch	J7	External memory card	SL1

Continued on next page. . .

# UNIDENTIFIED

## C-3200

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J2	Open
Monitor type select color	J2	Closed
í Factory configured - do not alter	J3	Open
í NPU disabled	J5	Open
NPU enabled	J5	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9

CPU TYPE CONFIGURATION	
Type	JP2
A80386DX	Closed
A80386DX IV	Open