


DTK COMPUTER, INC.

PEM - 1601

Processor	80386SX
Processor Speed	16MHz
Chip Set	Unidentified
Max. Onboard DRAM	1MB
Cache	None
BIOS	DTK
Dimensions	355mm x 305mm
I/O Options	Parallel port, serial ports (2)
NPU Options	80387SX

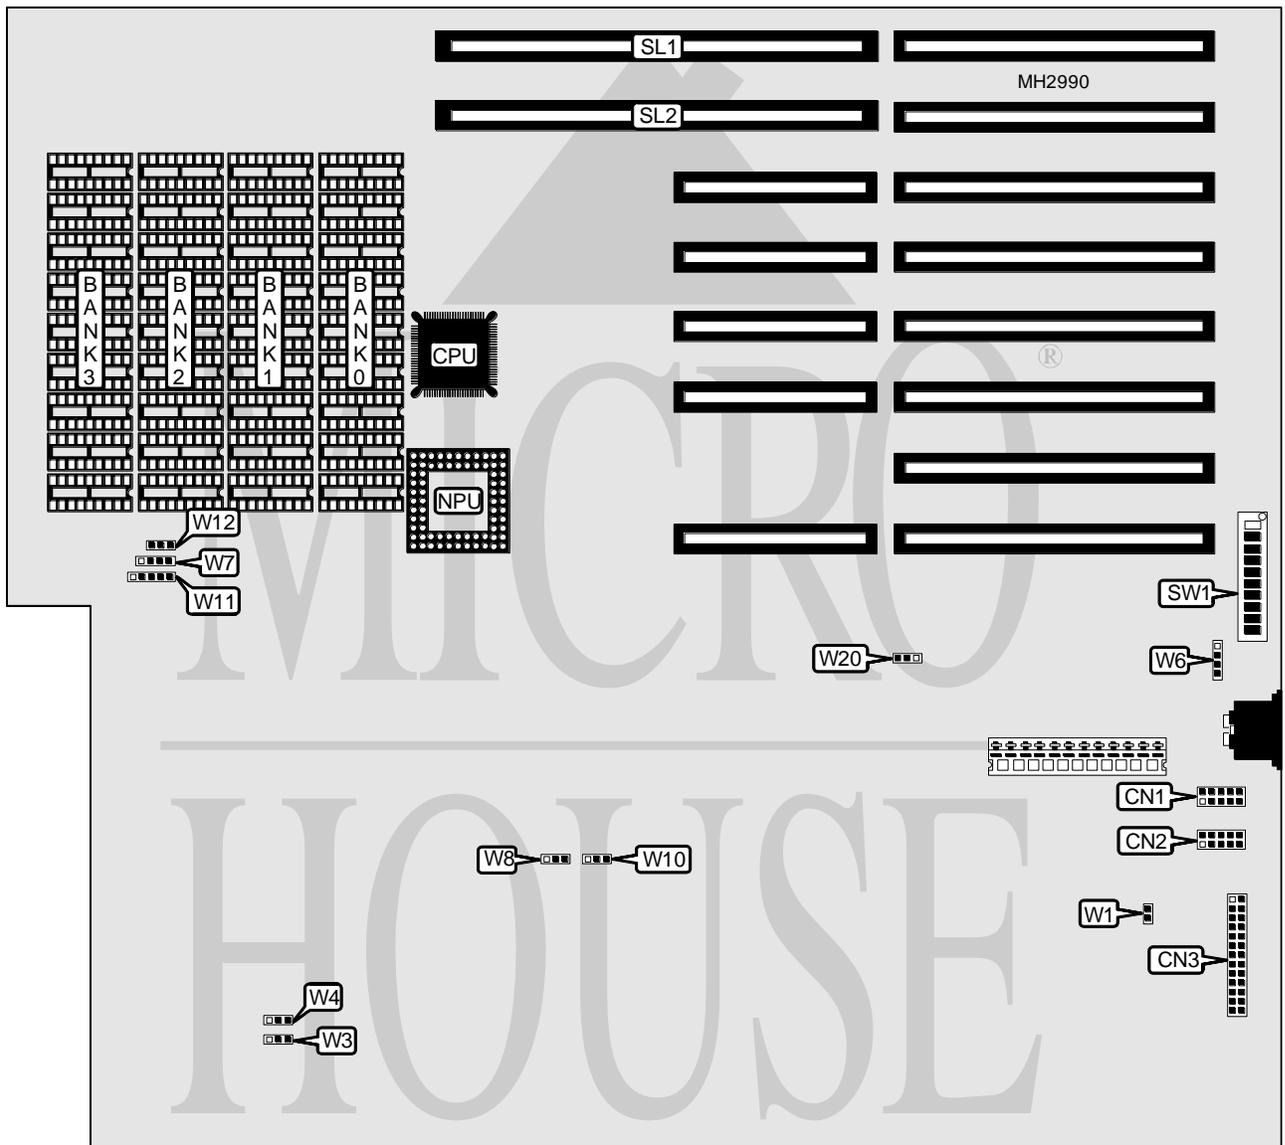

Continued on next page. . .

DTK COMPUTER, INC.

PEM - 1601

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	CN1	Speaker	W7
Serial port 1	CN2	Power LED & keylock	W11
Parallel port	CN3	Turbo LED	W12
Reset switch	W1	32-bit external memory card	SL1 & SL2
External battery	W6		

USER CONFIGURABLE SETTINGS			
Function	Jumper/Switch	Position	
16-bit memory I/O wait state select 1 wait state	W3	pins 1 & 2 closed	
16-bit memory I/O wait state select 2 wait states	W3	pins 2 & 3 closed	
8-bit memory I/O wait state select 4 wait states	W4	pins 1 & 2 closed	
8-bit memory I/O wait state select 5 wait states	W4	pins 2 & 3 closed	
Monitor type select monochrome	W8	pins 1 & 2 closed	
Monitor type select color	W8	pins 2 & 3 closed	
NPU disabled	W20	pins 2 & 3 closed	
NPU enabled	W20	pins 1 & 2 closed	
Serial port 1 enabled	SW1/1	Off	
Serial port 1 disabled	SW1/1	On	
Serial port 2 enabled	SW1/2	Off	
Serial port 2 disabled	SW1/2	On	
Parallel port enabled	SW1/3	Off	
Parallel port disabled	SW1/3	On	
Parallel port LPT select LPT1	SW1/4	Off	
Parallel port LPT select LPT2	SW1/4	On	
Serial port 1 IRQ4 enabled	SW1/5	On	
Serial port 1 IRQ4 disabled	SW1/5	Off	
Serial port 1 IRQ3 enabled	SW1/6	On	
Serial port 1 IRQ3 disabled	SW1/6	Off	
Serial port 2 IRQ4 enabled	SW1/7	On	
Serial port 2 IRQ4 disabled	SW1/7	Off	
Serial port 2 IRQ3 enabled	SW1/8	On	
Serial port 2 IRQ3 disabled	SW1/8	Off	

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(9) 41256	(9) 41256	(9) 41256	(9) 41256

CPU SPEED CONFIGURATION	
Speed	W10
Switchable from keyboard	pins 2 & 3 closed
8MHz	pins 1 & 2 closed
16MHz	Open

Continued on next page. . .

DTK COMPUTER, INC.
PEM - 1601

... continued from previous page

PARALLEL PORT INTERRUPT CONFIGURATION		
IRQ	SW1/9	SW1/10
IRQ7	On	Off
IRQ5	Off	On