


UNIDENTIFIED OPM 386 MOTHER BOARD

Processor	80386DX
Processor Speed	25MHz
Chip Set	OPTI
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	IDE interface, Floppy drive interface
NPU Options	80387DX/3167

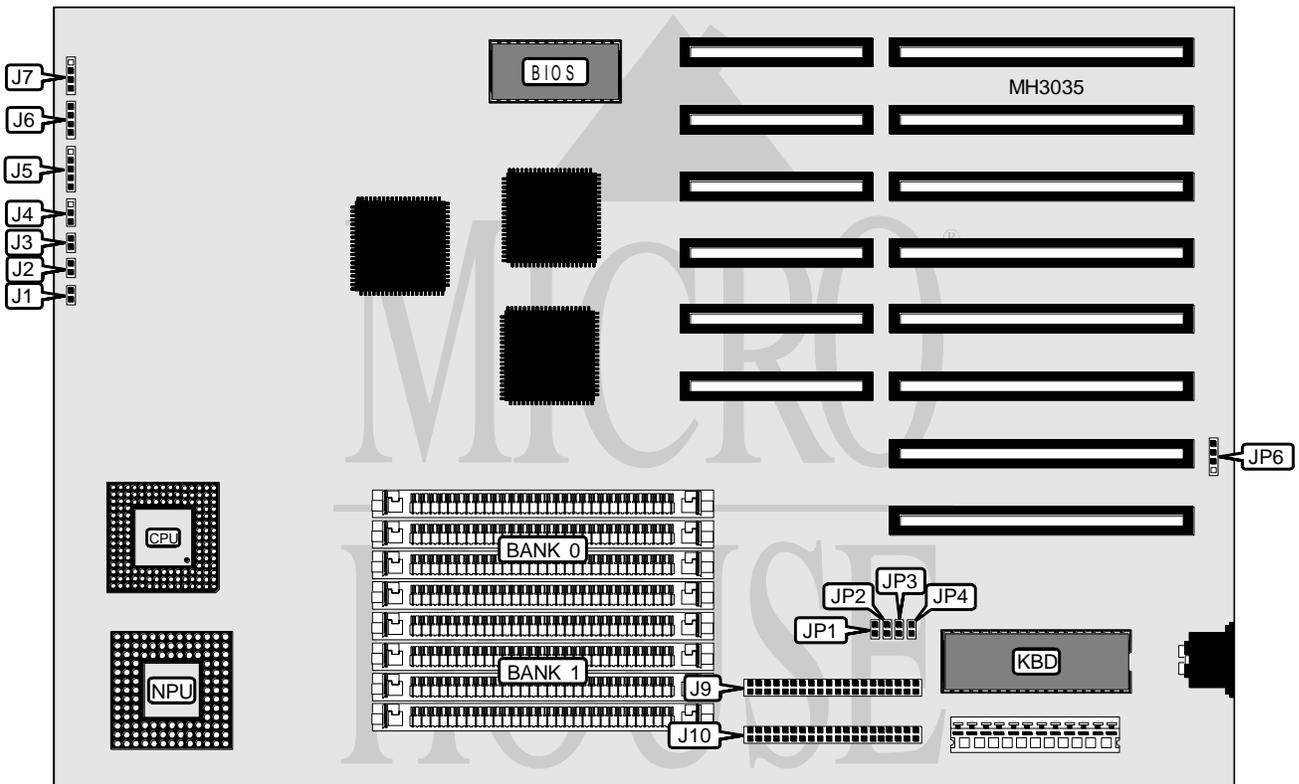

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J1	Speaker	J7
Reset switch	J2	IDE interface	J9
Turbo LED	J3	Floppy drive interface	J10
Power LED & keylock	J5	External battery	JP6
IDE interface LED	J6		

Continued on next page. . .

UNIDENTIFIED

OPM 386 MOTHER BOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Monitor type select color	J4	pins 1 & 2 closed
Monitor type select monochrome	J4	pins 2 & 3 closed
í Pipeline disabled	J8	pins 1 & 2 closed
Pipeline enabled	J8	pins 2 & 3 closed
í Floppy drive interface address select 370h - 377h	JP3	Closed
Floppy drive interface address select 3F0h - 3FFh	JP3	Open
Floppy drive interface enabled	JP4	Closed
Floppy drive interface disabled	JP4	Open

Note: The location of J8 is unidentified.

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9

IDE INTERFACE CONFIGURATION		
Setting	JP1	JP2
Enabled	Open	Closed
Disabled	Closed	Open